

Fișă tehnică produs

Specificatii



Releu Multifuncție, 12, 240 V Ca/Cc, 2 I/D

RE22R2MMW

Principale

gama de produse	Harmony Timer Relays
tip de iesire discreta	Releu
Tip produs sau componenta	Releu de sincronizare modular
nume scurt al dispozitivului	RE23
curent nominal de iesire	8 A

Suplimentare

tip si compozitie contacte	1 C/O contact temporizat 1 C/O contacte temporizate sau instantanee
tip intarziere	Power on-delay On-delay and off-delay Interval Temporizare la revenire Symmetrical flashing
intervalul de intarziere	0.1...1 s 6...60 s 1...10 H 1...10 min 1...10 s 10...100 H 6...60 min
tip de control	Maner sferic rotativ panou frontal
[Us] tensiune nominala de alimentare	12...240 V c.a./c.c.
interval de tensiune	0,85...1,1 Us
frecventa de alimentare	50...60 Hz +/- 5 %
conexiuni - borne	Borne cu surub, 2 x 1,5 mm ² cu pini Borne cu surub, 2 x 2,5 mm ² fara terminale de cablu
cuplu de strangere	0,6...1 N.m conformitate cu IEC 60947-1
material carcasa	Policarbonat
precizie de repetare	+/- 0,5 % conformitate cu IEC 61812-1
Abatere temperatura	+/- 0,05 %/°C
abatere a tensiunii	+/- 0,2 %/V
setarea preciziei temporizarii	+/- 10 % din capatul scarii la 25 °C conformitate cu IEC 61812-1

Time delay type	Power on-delay - A- Power on-delay relay On-delay and off-delay - Ac- On-delay and off-delay relay w/ control signal Power on-delay - At- Power on-delay relay w/ pause/summation (Y1) Interval - B- Single interval relay w/ control signal Interval - Bw- Double interval relay w/ control signal Temporizare la revenire - C- Off-delay relay w/ control signal Symmetrical flashing - D- Symmetrical flashing relay (starting pulse-off) Symmetrical flashing - Di- Symmetrical flashing relay (starting pulse-on) Interval - H- Interval relay Interval - Ht- Interval relay w/ pause/summation (Y1)
Control signal pulse width	30 ms 100 ms sub sarcină
rezistenta de izolare	100 MΩ la 500 V c.c. conformitate cu SR EN 60664-1
Recovery time	120 ms la întreruperea alimentării
imunitate la microîntreruperi	10 ms
puterea consumată în VA	3 VA la 240 V c.a.
puterea consumată în W	1,5 W la 240 V c.c.
capacitate de rupere	2000 VA
curentul minim de comutare	10 mA la 5 V
curent maxim comutat	8 A
tensiunea maximă de comutație	250 V
durabilitate electrică	100000 cic pentru rezistiv sarcină, 8 A la 250 V, AC
durabilitate mecanică	10000000 cic
Rated impulse withstand voltage	5 kV pentru 1,2...50 μs conformitate cu SR EN 60664-1 5 kV conformitate cu IEC 61812-1
Power on delay	100 ms
fiabilitate securitate date	B10d = 230000 MTTFd = 251.1 ani
poziția de montaj	Orice poziție în raport cu planul normal vertical de montare
suport de montare	Sina DIN 35 mm conformitate cu IEC 60715
stare LED	Verde LED (intermitent) pentru temporizare în progres Verde LED (stabil) pentru alimentat Galben LED pentru releu alimentat
funcție disponibilă	A- Power on-delay relay-2 C/O Ac- On-delay and off-delay relay w/ control signal-2 C/O At- Power on-delay relay w/ pause/summation (Y1)-2 C/O B- Single interval relay w/ control signal-2 C/O Bw- Double interval relay w/ control signal-2 C/O C- Off-delay relay w/ control signal-2 C/O D- Symmetrical flashing relay (starting pulse-off)-2 C/O Di- Symmetrical flashing relay (starting pulse-on)-2 C/O H- Interval relay-2 C/O Ht- Interval relay w/ pause/summation (Y1)-2 C/O
lățime	22,5 mm
greutate produs	0,093 kg
tip de control	With test button
Number of functions	10

Mediu

rigiditate dielectrică	2,5 kV pentru 1 mA/1 minut la 50 Hz conformitate cu IEC 61812-1
-------------------------------	---

standarde	IEC 61812-1 IEC 61000-6-2 IEC 61000-6-1 IEC 61000-6-4 IEC 61000-6-3
directive	2004/108/EC - compatibilitate electromagnetica 2006/95/EC - directiva de joasa tensiune
certificari produs	CSA UE cULus GL RCM CCC EAC
temperatura ambientala de functionare	-20...60 °C
temperatura ambietala pentru depozitare	-30...60 °C
grad de protectie IP	IP40 carcasa: conformitate cu SR EN 60529 IP20 bloc terminal: conformitate cu SR EN 60529 IP40 parte frontala: conformitate cu SR EN 60529
rezistenta la vibratii	20 m/s ² (f= 10...150 Hz) conforming to IEC 60068-2-6
rezistenta la socuri	15 gn pentru 11 ms conformitate cu IEC 60068-2-27
umiditate relativa	93 %, fara condensare conformitate cu IEC 60068-2-30
compatibilitate electromagnetica	Test de imunitate la descarcari electrostatice - nivel de testare:6 kV nivel 3 (descarcare pe contact) conforming to IEC 61000-4-2 Test de imunitate la descarcari electrostatice - nivel de testare:9 kV nivel 3 (descarcare in aer) conforming to IEC 61000-4-2 Test de imunitate la tranzienti rapizi - nivel de testare:1 kV nivel 3 (brida de conectare capacitiva) conforming to IEC 61000-4-4 Test de imunitate la tranzienti rapizi - nivel de testare:2 kV nivel 3 (contact direct) conforming to IEC 61000-4-4 Test de imunitate la supratensiuni - nivel de testare:1 kV nivel 3 (mod diferential) conforming to IEC 61000-4-5 Test de imunitate la supratensiuni - nivel de testare:2 kV nivel 3 (mod comun) conforming to IEC 61000-4-5 Test de imunitate la frecventa radio radiata - nivel de testare:10 V nivel 3 (0.15 - 80 MHz) conforming to IEC 61000-4-6 Test de imunitate la camp electromagnetic - nivel de testare:10 V/m nivel 3 (80 MHz - 1 GHz) conforming to IEC 61000-4-3 Imunitate la microintreruperi si caderi ale tensiunii - nivel de testare:30 % (500 ms) conforming to IEC 61000-4-11 Imunitate la microintreruperi si caderi ale tensiunii - nivel de testare:100 % (21 ms) conforming to IEC 61000-4-11 Emisii conduse si radiate clasa B conforming to EN 55022

Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Numar de produse in pachet	1
Inaltime prima forma de impachetare	3,000 cm
Latime prima forma de impachetare	8,600 cm
Lungime prima forma de impachetare	9,900 cm
Greutate colet(Lbs)	108,000 g
Unitate de masura pentru a doua forma de impachetare	S02
Numar unitati in a doua forma de impachetare	40
Inaltime a doua forma de impachetare	15,000 cm
Latime a doua forma de impachetare	30,000 cm
Lungime a doua forma de impachetare	40,000 cm

Greutate a doua forma de impachetare	4,800 kg
---	----------

Garanție contractuală

Garantie (in luni)	18
--------------------	----

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

Amprenta de mediu

Amprenta de carbon totala pe durata de viata	66 kg CO2 eq.
Amprenta de carbon a fazei de fabricație [A1–A3]	2 kg CO2 eq.
Amprenta de carbon a fazei de distribuție [A4]	0 kg CO2 eq.
Amprenta de carbon a fazei de instalare [A5]	0 kg CO2 eq.
Amprenta de carbon a fazei de utilizare [B2, B3, B4, B6]	64 kg CO2 eq.
Amprenta de carbon a fazei de sfârșit de viață [C1–C4]	0.1 kg CO2 eq.
Raport de mediu	Profilul ambiental al produsului

Use Better

Materiale si ambalare

Pachet cu carton reciclabil	Da
Ambalaj fara plastic	Da
Numar SCIP	7bdc2711-0ad2-427c-8ece-532c5e9f09d7
Directiva RoHS a UE	Conform Prin Scutire
Regulamentul REACH	Referința conține SVHC peste prag

Use Longer

Prelungire durata de viata

Reparare	Nu
----------	----


Use Again

Reambalare si refabricare

Potentialul de reciclabilitate, in %	18
Profil circularitate	Informatii privind sfarsitul duratei de viata
Preluare la sfarsitul duratei de viata	Da


Dimensions Drawings

Dimensions

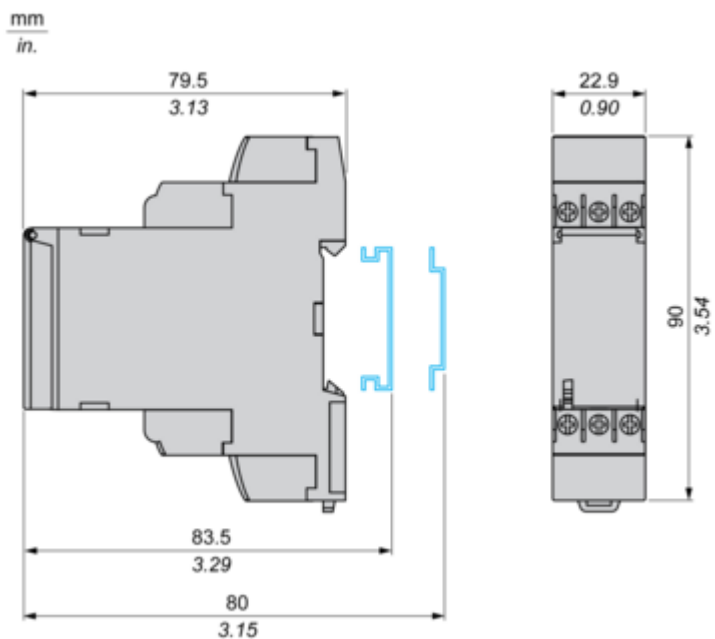


Connections and Schema

Internal Wiring Diagram



Wiring Diagram




Technical Description

Function A : Power on Delay Relay

Description

The timing period T begins on energization. After timing, the output(s) relay close(s).

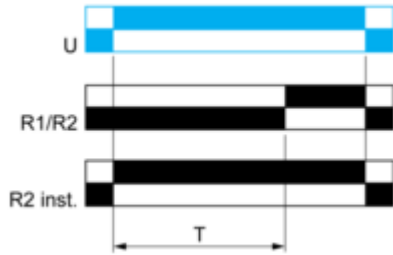

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)


Function Ac : On- and Off-Delay Relay with Control Signal

Description

After power-up, closing of the control contact Y1 causes the timing period T to start (timing can be interrupted by operating the Gate control contact G). At the end of this timing period, the relay closes.

When control contact Y1 re-opens, the timing T starts. At the end of this timing period T

At the end of this timing period T, the output reverts to its initial position (timing can be interrupted by operating the Gate control contact G).

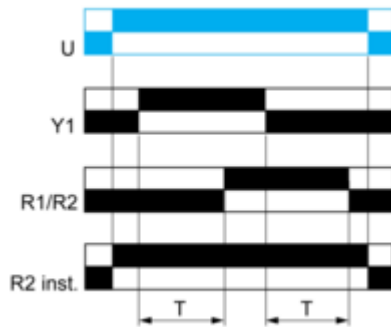


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact Y1 starts the timing. Timing can be interrupted each time control contact Y1 closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

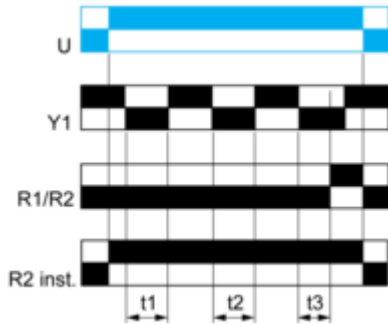


$$T = t_1 + t_2 + t_3$$

Function B : Interval Relay with Control Signal

Description


After power-up, pulsing or maintaining control contact Y1 starts the timing T. The output relay closes for the duration of the timing period T then reverts to its initial state.

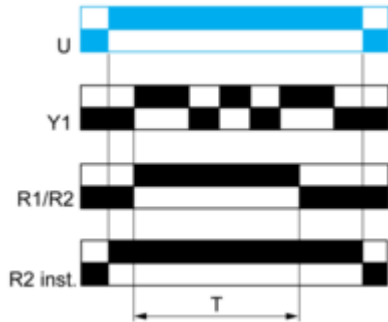

Function Bw : Double Interval Relay with Control Signal

Description


On closing and opening of control contact Y1, the output relay closes for the duration of the timing period T.

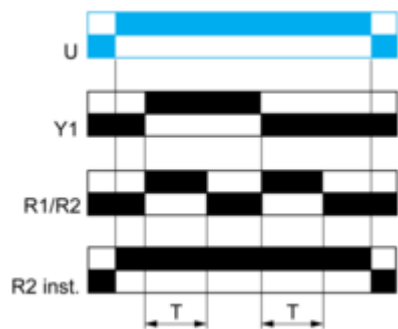

Function C : Off-Delay Relay with Control Signal

Description

After power-up and closing of the control contact Y1, the output relay closes. When control contact Y1 re-opens, timing T starts. At the end of the timing period, the output(s) relay revert(s) to its/their initial state.

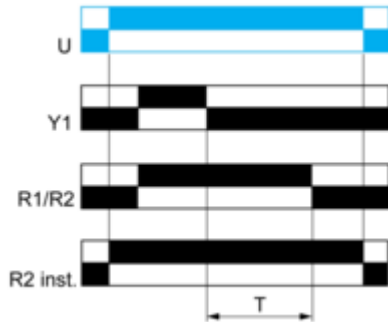


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse Off)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T .

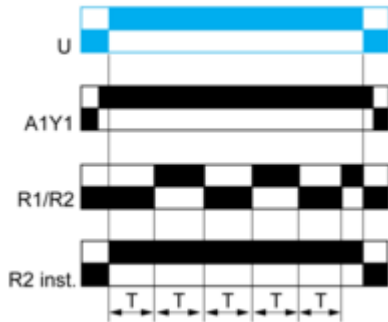


Before power-up Y1 should be permanently connected to A1.

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

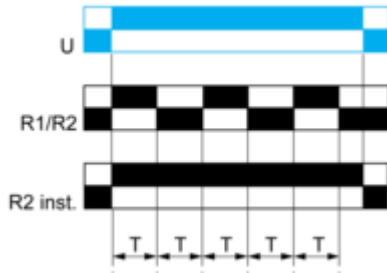


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function H : Interval Relay

Description

On energization of the relay, timing period T starts and the output(s) relay close(s). At the end of the timing period T, the output(s) relay revert(s) to its/their initial state

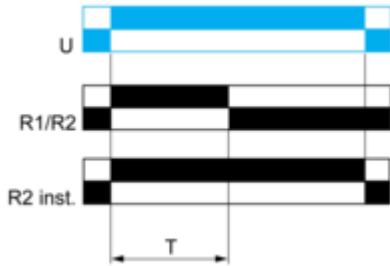

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Legend

- Relay de-energised
- Relay energised
- Output open
- Output closed

Y1 :	Control contact
R1/R2 :	2 timed outputs
R2 inst. :	The second output is instantaneous if the right position is selected
T :	Timing period
U :	Supply

Function Ht: Interval Relay & With Pause / Summation Control

Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

Function: 1 Output




$T = t1 + t2 + \dots$

Function: 2 Outputs




$T = t1 + t2 + \dots$

Function: 1 Output with Retrigger / Restart Control



$T = t1 + t2 + \dots$

Function: 2 Outputs with Retrigger / Restart Control

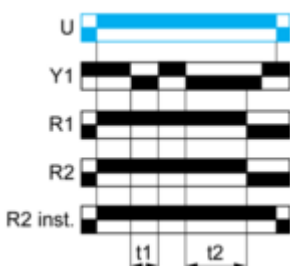


$T = t1 + t2 + \dots$

Technical Illustration

Dimensions

mm
in.

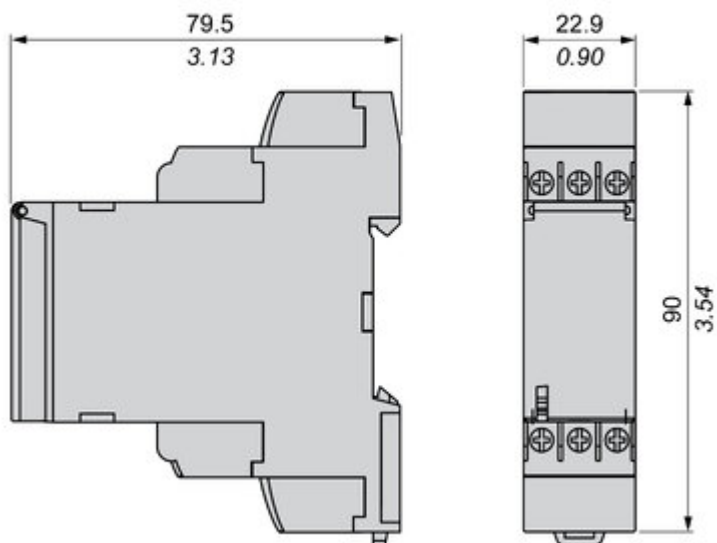

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Timer Relay

Flexible choice of screw or spring connection terminals for wiring.

One product reference covering 28 timing functions, 2 outputs, and a wide range of supply voltage 24...240 V AC/DC.

Dust and unintended human intervention avoided thanks to the IP50 lead-sealable settings protection cover.

A Dial-Pointer LED indicator that enhances ease of operation in difficult environments such as dusty or low-light conditions

Different mounting style to meet your preference:
DIN rail mount with product width; 17.5 mm/0.69 in.
22.5 mm/0.88 in.
Plug in mounting with socket



Offer Marketing Illustration

Product benefits / Features



Features

Harmony Timer Relay

-  "Diagnostic button" to check downstream circuit immediately, shorten the commission and troubleshooting time
-  Compatible with a wide range of applications including machines, buildings, water segments, and HVAC.
-  Wide range of time delay for adjustment: from 0.01 s to 999 hrs.
-  Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.
-  Unprecedented accuracy, predictive maintenance, and superior security.

Image of product / Alternate images

Alternative

