

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, Plug straight M8, coding: A, on Socket straight M8, cable length: 1.5 m

Avantajele dumneavoastră

- Easy and safe: 100 % electrically tested plug-in components

Date comerciale

Număr articol	1681923
Unitate de ambalare	1 Bucată
Cantitate minimă pentru comandă	1 Bucată
Cod de achiziție	02
Cod produs	BF1BBA
Pagina de catalog	Pagina 188 (C-2-2019)
GTIN	4017918158583
Greutate pe bucată (inclusiv ambalajul)	36,4 g
Greutate pe bucată (fără ambalaj)	35 g
Cod tarifar vamal	85444290
Țara de origine	DE

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Date tehnic

Product properties

Product type	Sensor/actuator cable
Application	Standard
Number of positions	3
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	------------

Signaling

Status display	No
Status display present	No

Connection data

Conductor connection

Tightening torque	0.2 Nm (M8 connectors)
-------------------	------------------------

Connector

Connection 1

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable

1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Type	Plug straight M8
Number of positions	3
Coding type	A


Connection 2

Type	Socket straight M8
Number of positions	3

Cable/line

Cable length	1.5 m
--------------	-------

PUR halogen-free black [PUR]

Desen dimensional	
Cable weight	18 kg/km
UL AWM Style	20549 / 10493 (80°C/300 V)
Number of positions	3
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	32x 0.10 mm
AWG signal line	24
Conductor cross section	3x 0.25 mm ² (Signal line)
Wire diameter incl. insulation	1.17 mm ±0.02 mm
External cable diameter	3.60 mm ±0.15 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	brown, blue, black
Thickness, insulation	≥ 0.21 mm (Core insulation)
Thickness, outer sheath	approx. 0.50 mm
Overall twist	3 wires, twisted
Length of twist, overall twist	40 mm
Max. conductor resistance	≤ 78 Ω/km (at 20 °C)
Insulation resistance	≥ 100 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 3000 V
Smallest bending radius, fixed installation	18 mm
Smallest bending radius, movable installation	36 mm

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Max. bending cycles	10000000
Halogen-free	in accordance with DIN VDE 0472 part 815
Flame resistance	in accordance with UL 758/1581 FT2 DIN EN 60332-2-2 (20 s)
Resistance to oil	in accordance with DIN EN 60811-2-1
Other resistance	hydrolysis and microbe resistant Highly resistant to acids, alkaline solutions and solvents Resistant to salt water partly UV-resistant (in accordance with DIN EN ISO 4892-2-A)
Special properties	Flexible cable conduit capable Silicone-free Free of substances which would hinder coating with paint or varnish
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation) -25 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65 IP67 IP68
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket) -40 °C ... 80 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation)

Standards and regulations

Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104


SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable

1681923

<https://www.phoenixcontact.com/ro/produse/1681923>


Desene

Schematic diagram

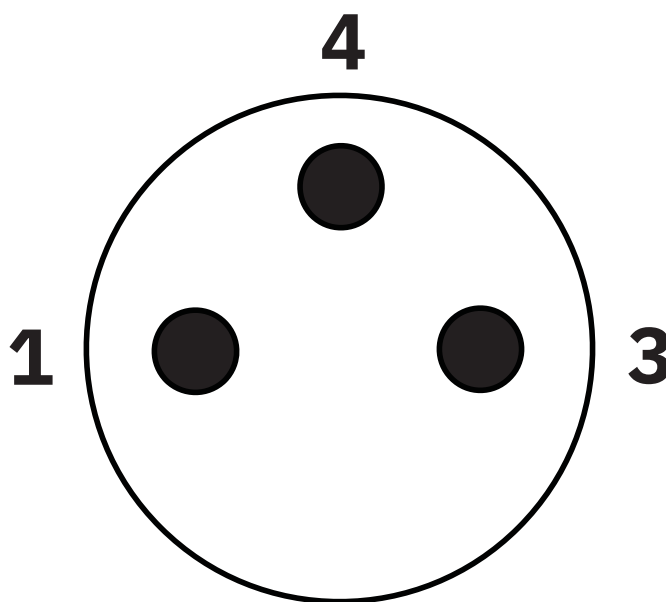

Pin assignment M8 plug, 3-pos., view male side

Schematic diagram

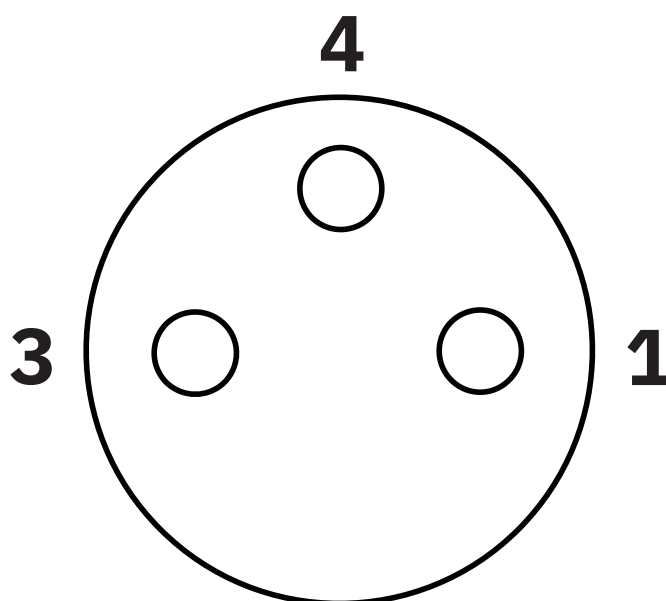


Pin assignment M8 socket, 3-pos., view female side

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable

1681923


<https://www.phoenixcontact.com/ro/produse/1681923>

Dimensional drawing

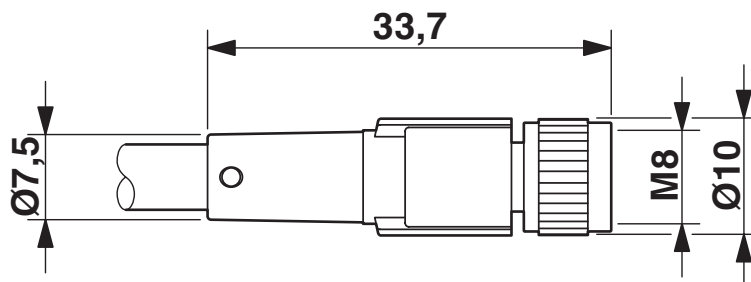

Socket M8 x 1, straight

Dimensional drawing

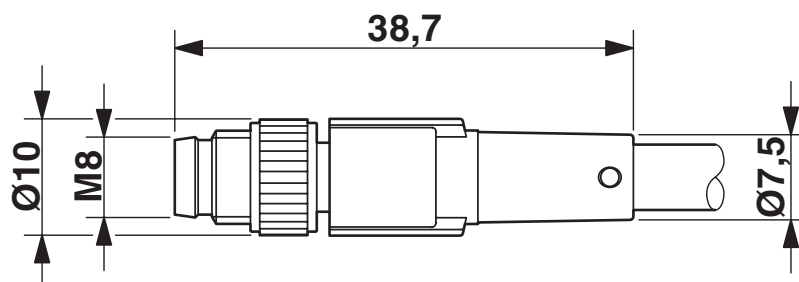

M8 x 1 male plug, straight version


SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Circuit diagram

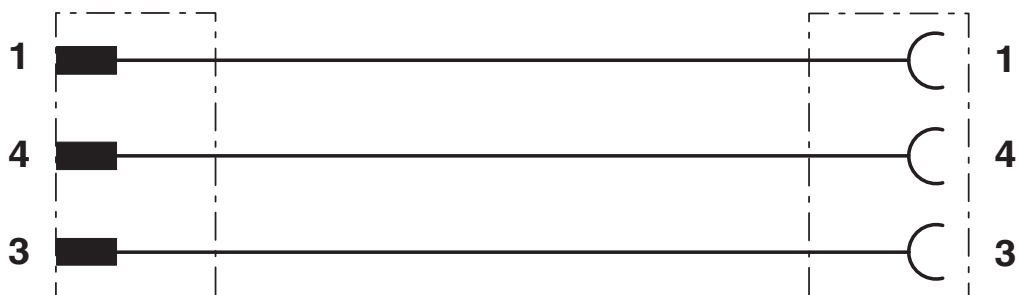

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Aprobări

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/produse/1681923>

UL Listed

ID de înregistrare: FILE E 221474

	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
	60 V	4 A	-	-

cUL Listed

ID de înregistrare: FILE E 221474

	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
	60 V	4 A	-	-

EAC-RoHS

ID de înregistrare: RU D-DE.HB35.B.00387

cULus Listed

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Clasificări

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

Accesorii

PROT-M 8 FS-PA-CHAIN - Sealing cap

1430857

<https://www.phoenixcontact.com/ro/produse/1430857>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/ro/produse/0801453>

Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 30



SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable

1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/ro/produse/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 24

US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/ro/produse/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 56

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/ro/produse/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 3000

PROT-M 8 MS-PA-CHAIN - Screw plug

1430860

<https://www.phoenixcontact.com/ro/produse/1430860>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable

1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/ro/produse/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/ro/produse/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SAC-3P-M 8MS/ 1,5-PUR/M 8FS - Sensor/actuator cable



1681923

<https://www.phoenixcontact.com/ro/produse/1681923>

SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/ro/produse/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

Phoenix Contact 2024 © - Toate drepturile rezervate

<https://www.phoenixcontact.com>

PHOENIX CONTACT România

Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1

Bucuresti 030133

+40 21 350 88 12 - 3

sales.ro@phoenixcontact.com