

Fișă tehnică produs

Specificatii



unitate de baza + capac
pentrubaterie XVB, fara tub desc.
intermitent, negru, IP65

XVBC21

! Fabricatie intrerupta la data de: 5 nov. 2024

! Finalul ciclului de service: 31 dec. 2025

! Va fi retras de la
comercializare

Principale

gama de produse	Harmony XVB Universal
Tip produs sau componenta	Unitate de baza cu capac
nume componenta	XVBC
Material	Poliamidă armată cu fibră de sticlă: unitate de baza Policarbonat: acoperiți

Suplimentare

mod de fixare	Fixare directa sau cu tub
diametrul de montaj	70 mm
destinatie produs	Baterii fara unitate cu tub de descarcare intermitenta
conexiune electrica	1 conector pentru standard input
intrare cablu	Intrare prin partea inferioara sau laterala
stil de asamblare	Ansamblu client, pana la 5 unitati
descriere borne ISO nr. 1	(GND)GROUND (COM-1)PW (COM-4)PW (COM-3)PW (COM-5)PW (COM-2)PW
greutate produs	0,19 kg

Mediu

certificari produs	CCC EAC CSA C22-2 Nr. 14 UL 508
standarde	SR EN 60947-5-1
tratament protector	TC
temperatura ambietala pentru depozitare	-40...70 °C
grad de protectie NEMA	Type 4X conformitate cu UL (în interior)

Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Numar unitati in prima forma de impachetare	1

Declinare de responsabilitate: Această documentație nu se substituie și nu trebuie utilizată pentru stabilirea adecvării sau fiabilității acestor produse pentru aplicații utilizator

Inaltime prima forma de impachetare	8,500 cm
Latime prima forma de impachetare	10,000 cm
Lungime prima forma de impachetare	9,500 cm
Greutate prima forma de impachetare	206,000 g
Unitate de masura pentru a doua forma de impachetare	S03
Numar unitati in a doua forma de impachetare	36
Inaltime a doua forma de impachetare	30,000 cm
Latime a doua forma de impachetare	30,000 cm
Lungime a doua forma de impachetare	40,000 cm
Greutate a doua forma de impachetare	8,173 kg
Unitate de masura pentru a treia forma de impachetare	P06
Numar unitati in a treia forma de impachetare	288
Inaltime a treia forma de impachetare	75,000 cm
Latime a treia forma de impachetare	60,000 cm
Lungime a treia forma de impachetare	80,000 cm
Greutate a treia forma de impachetare	71,516 kg

Garanție contractuală

Garantie	18 luni
----------	---------

Environmental Data

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

Amprenta de mediu

Amprenta de carbon (kg CO2 eq.)	31
---------------------------------	----

Use Better

Materiale si ambalare

Pachet cu carton reciclabil	Da
Ambalaj fara plastic	Da
Directiva RoHS UE	Conformitate proactiva (Produs in afara domeniului de aplicare a EU RoHS)
Numar SCIP	91020e1b-4a08-4f42-b464-aa95672e6762
Regulamentul REACH	Declaratia REACH

Use Again

Reambalare si refabricare


Profil circularitate	Nu sunt necesare operatii de reciclare speciale
Preluare la sfarsitul duratei de viata	No
DEEE	 Produsul trebuie sa fie eliminat de pe piata din Uniunea Europeana dupa colectarea specifica a deseurilor si sa nu ajunga niciodata in pubele de gunoi

Dimensions Drawings

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

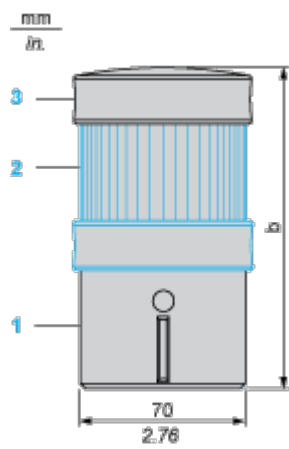


- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC..., to be ordered separately
- (3) Cover (supplied with base unit)

Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

Mounting and Clearance

Base Unit for Indicator Banks


Panel Cut-out for Direct Fixing

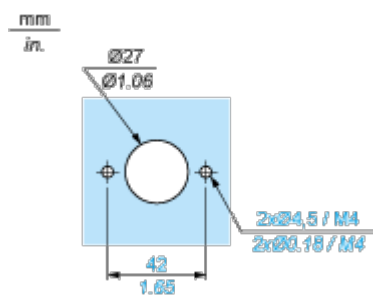

Connections and Schema


Illuminated Beacon

Wiring Diagram




Technical Illustration

Dimensions

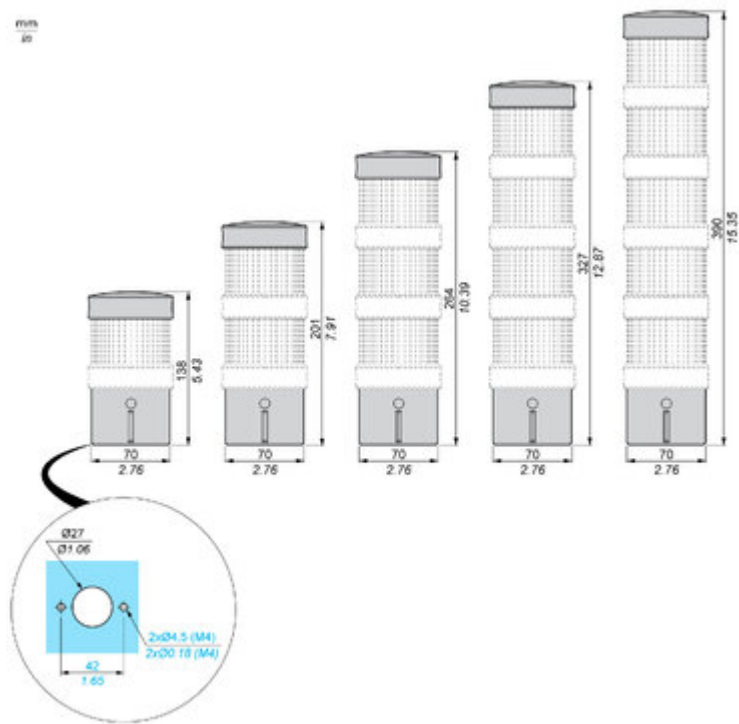

Technical Illustration

Wiring diagram

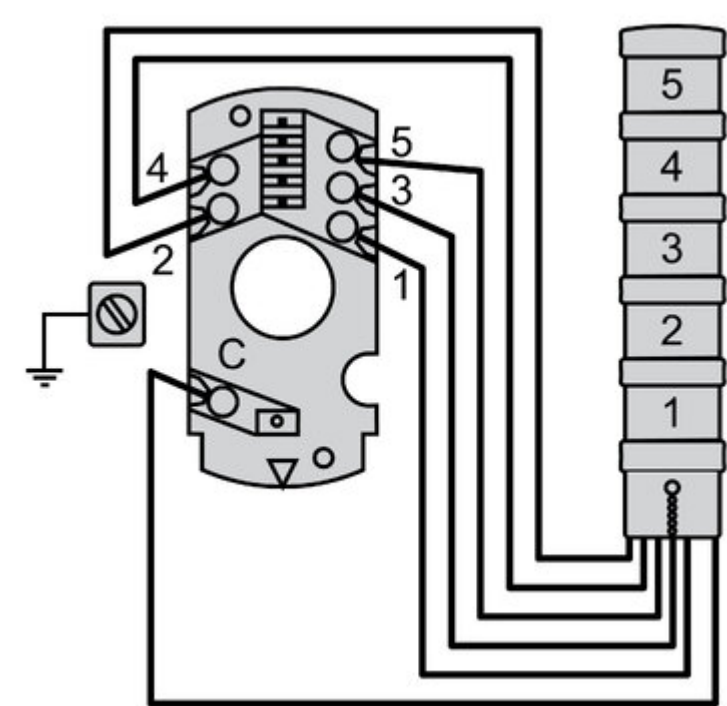

Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Features

Harmony XVB



3 types of light source:
10-Watt incandescent bulb,
built-in high-efficiency
LEDs, 5 and 10-joule
discharge tube



100,000 hours of
maintenance-free lighting
thanks to "LED Protected"
technology



Connector with
removable base, axial,
or side cable entry,
immediate assembly, and
fixing using a locking ring



High degree of protection
(IP66) and Shock
resistance (IK05)





Fully flexible and interchangeable
construction of up to 5 lens units
(six colors of light lens unit)

Image of product / Alternate images

Alternative





Image of product in real life situation

