

Fișă tehnică produs

Specificatii



Modul de autoblocare, Easy Harmony XB2, Push-ON / Push-OFF

ZB2BZ21C

Principale

gama de produse	Easy Harmony XB2
Tip produs sau componenta	Mecanism pentru buton
nume scurt al dispozitivului	XB2
material inel de fixare	Zamak
Culoare principala	Negru
categorii accesorii / piese de schimb	Push-push functionality accessory
destinatia accesorii/piese separate	Illuminated and non-illuminated push button

Suplimentare

cantitate indivizibila de vanzare	1
latime	30 mm
inaltime	25 mm
adancime	13 mm
greutate produs	0,015 kg
material	Plastic
Compatibilitate gama	XB2
personalizabil	Nu

Mediu

tratament protector	TC/TH
standarde	IEC 60947-1 SR EN 60947-5-1 GB/T 14048.5 GB/T 14048.1
rezistenta la vibratii	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
certificari produs	CCC UE
temperatura ambietala pentru depozitare	-40...70 °C
temperatura ambientala de functionare	-25...70 °C

Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Numar unitati in prima forma de impachetare	1

Inaltime prima forma de impachetare	1,473 cm
Latime prima forma de impachetare	2,525 cm
Lungime prima forma de impachetare	3,005 cm
Greutate prima forma de impachetare	9 g
Unitate de masura pentru a doua forma de impachetare	S02
Numar unitati in a doua forma de impachetare	100
Inaltime a doua forma de impachetare	15 cm
Latime a doua forma de impachetare	30 cm
Lungime a doua forma de impachetare	40 cm
Greutate a doua forma de impachetare	1,331 kg
Unitate de masura pentru a treia forma de impachetare	P06
Numar unitati in a treia forma de impachetare	2000
Inaltime a treia forma de impachetare	90 cm
Latime a treia forma de impachetare	60 cm
Lungime a treia forma de impachetare	80 cm
Greutate a treia forma de impachetare	24,294 kg

Garanție contractuală

Garantie	18 luni
----------	---------

Environmental Data

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

Amprenta de mediu

Amprenta de carbon (kg CO2 eq.) 1

Raport de mediu [Profilul ambiental al produsului](#)

Use Better

Materiale si ambalare

Ambalaj fara plastic Nu

[Directiva RoHS UE](#) Conformitate proactiva (Produs in afara domeniului de aplicare a EU RoHS)

Numar SCIP 9e63340a-2371-4381-8f9a-5fba0ff349a4

Regulamentul REACH [Declaratia REACH](#)

Use Again

Reambalare si refabricare

Preluare la sfarsitul duratei de viata No

Offer Marketing Illustration

Product benefits / Features

Features
Easy Harmony XB2

-  Metal bezels with metal fixing collars for impact endurance
-  Designed to be used in numerous control and signaling applications
-  Metal screws for secure fix, grounding contact to the panel and anti-rotation
-  Simple modular design facilitates post installation servicing, modification and adaption of machines by non-specialists
-  Available in sub-assemblies for easy mix and match of functionalities

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Easy Harmony XB2

Supports operating temperature from -25°C to +70°C

Excellent resistance to mechanical shock and vibration



Conforming to CE, CCC and ROHS standards

Up to IP65 protection ratings

Offer Marketing Illustration

Product benefits / Features

Features
Easy Harmony XB2



- 

Metal bezels with metal fixing collars for impact endurance
- 

Designed to be used in numerous control and signaling applications
- 


Metal screws for secure fix, grounding contact to the panel and anti-rotation
- 


Simple modular design facilitates post installation servicing, modification and adaptation of machines by non-specialists
- 

Available in sub-assemblies for easy mix and match of functionalities

Image of product / Alternate images

Alternative

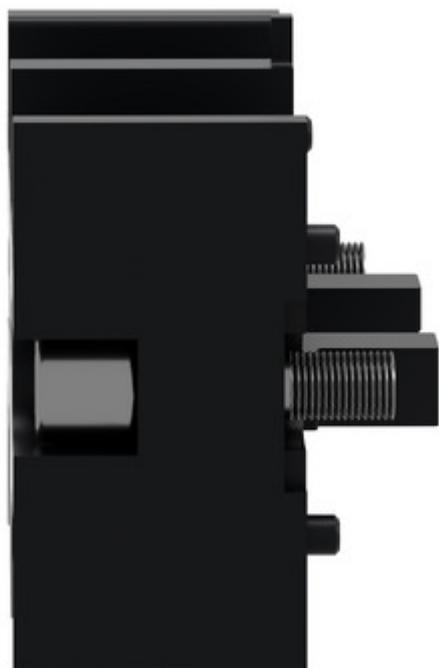

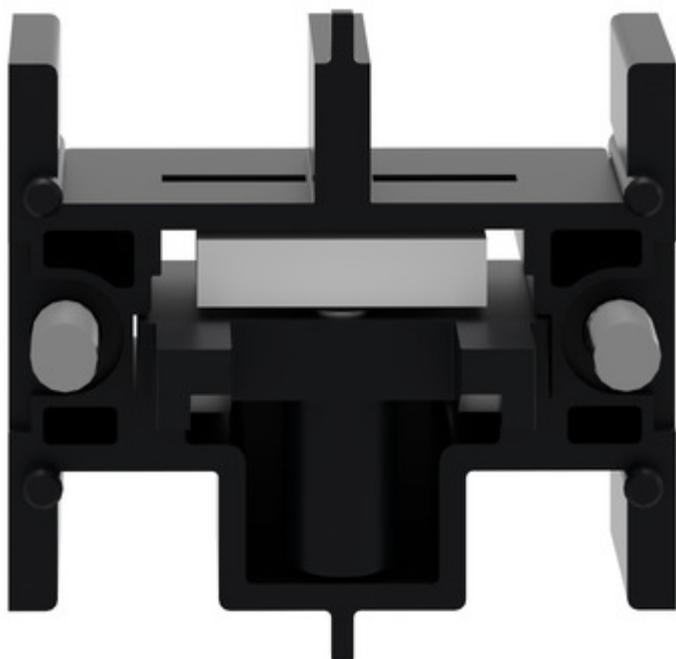

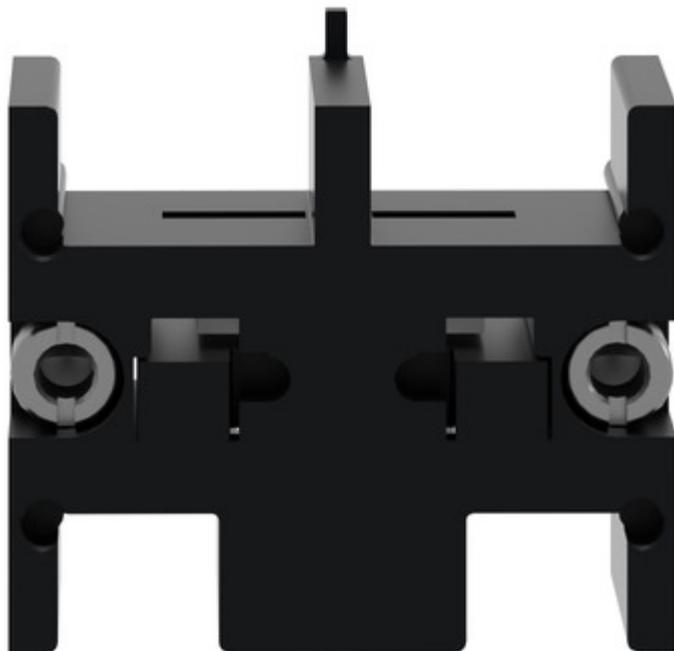


Image of product in real life situation

