



Center infeed terminal 50mm<sup>2</sup> for pin busbars according to UL 508

Model	
product brand name	SETRON
product designation	Center feeder terminal
design of the product	for pin busbar 50 mm <sup>2</sup> UL508
Supply voltage	
operating voltage at AC rated value	1 000 V
Connections	
tightening torque	
• minimum	3.5 N·m
• maximum	3.5 N·m
type of connectable conductor cross-sections for copper conductor stranded	2.5 - 50 mm <sup>2</sup>
Mechanical Design	
height	40 mm
width	17.75 mm
length	29.8 mm
Net Weight	33 g
Approvals Certificates	
Environment	General Product Approval

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

[Miscellaneous](#)



### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3770-1HG>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3770-1HG>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3770-1HG](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3770-1HG)


#### CAX-Online-Generator

<https://www.siemens.com/cax>

#### Tender specifications

<https://www.siemens.com/specifications>

#### Characteristic curves

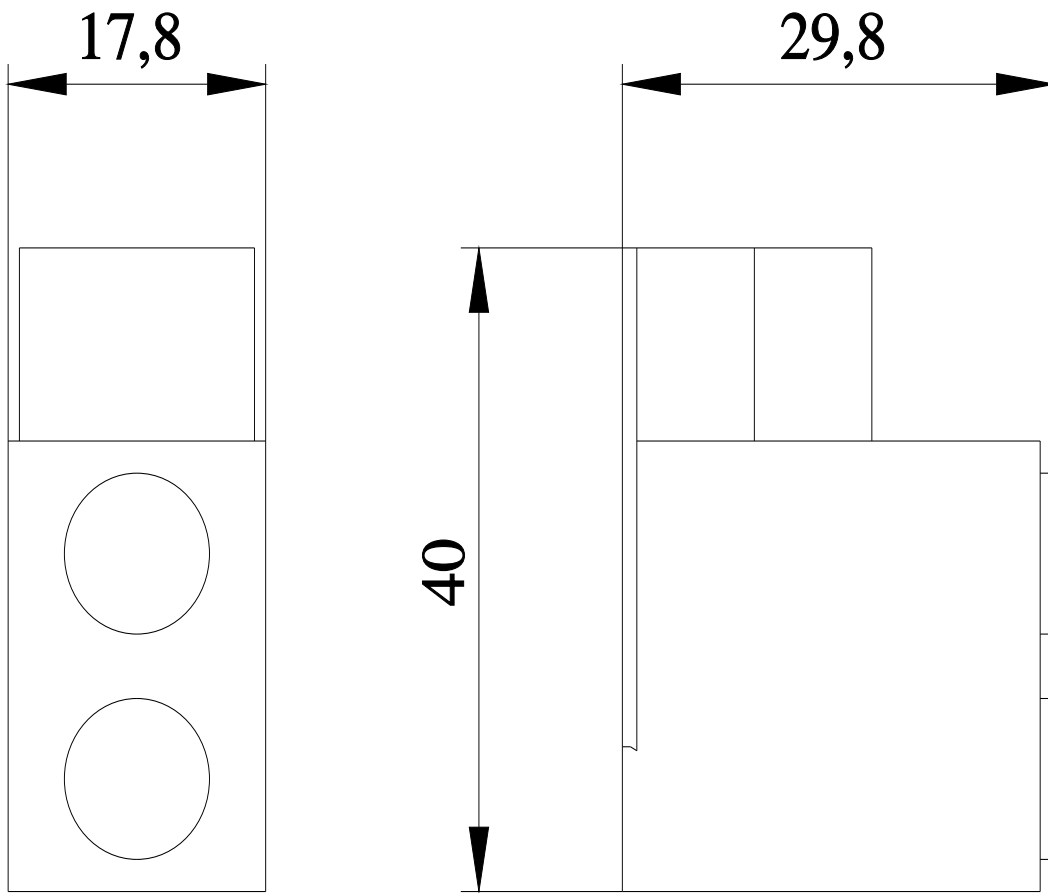

last modified:

4/11/2025 

