

FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/ro/produse/3036893>



Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.

Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue



Avantajele dumneavoastră

- The 2- to 50-pos. jumpers can bridge up to 50 terminal blocks in the two bridge shafts of the CLIPLINE complete system in one step

Date comerciale

Număr articol	3036893
Unitate de ambalare	50 Bucată
Cantitate minimă pentru comandă	50 Bucată
Cod produs	BE2Z2X
Pagina de catalog	Pagina 403 (C-1-2019)
GTIN	4017918839161
Greutate pe bucată (inclusiv ambalajul)	3,414 g
Greutate pe bucată (fără ambalaj)	3,359 g
Cod tarifar vamal	85366990
Țara de origine	DE

FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/ro/produse/3036893>



Date tehnice

Product properties

Product type	Jumper
Number of positions	4
Pitch	5.2 mm

Data management status

Article revision	06
------------------	----

Electrical properties

Maximum load current	24 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
----------------------	---

Connection data

Maximum load current	24 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
----------------------	---

Dimensions

Pitch	5.2 mm
-------	--------

Material specifications

Color	blue
Material	Copper
Flammability rating according to UL 94	V0
Insulating material	PA

Environmental and real-life conditions

Ambient conditions


Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	Plug-in mounting
---------------	------------------

Desene

Schematic diagram

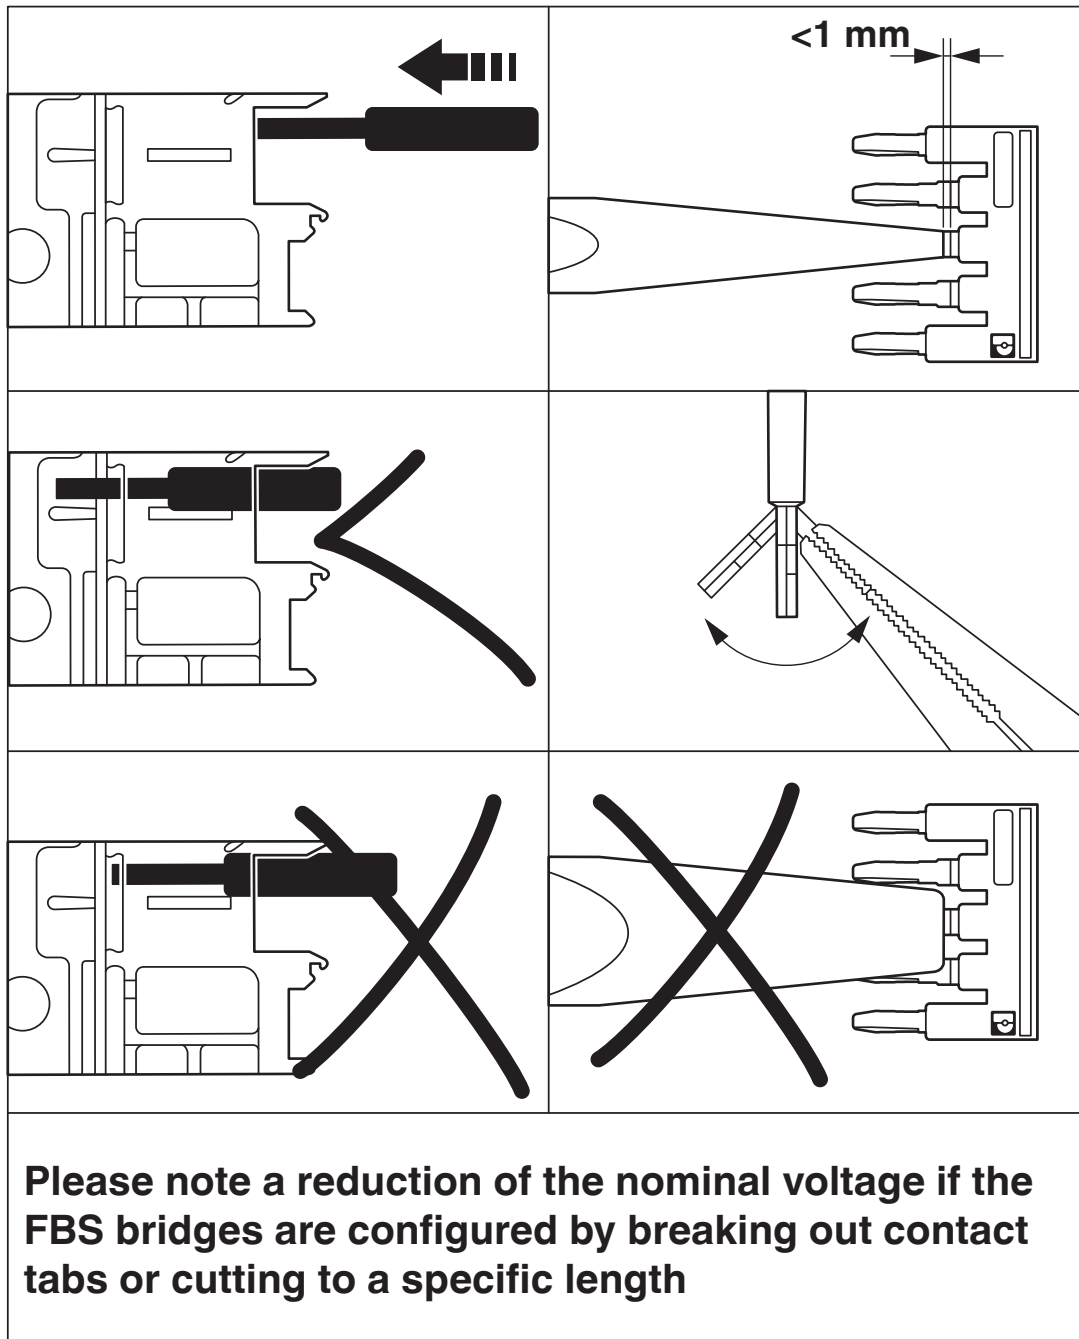

FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/ro/produse/3036893>



Clasificări

ECLASS

ECLASS-11.0	27141140
ECLASS-12.0	27141140
ECLASS-13.0	27250303

ETIM

ETIM 9.0	EC000489
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS

Îndeplinește cerințele conform directivei RoHS	Da, Nicio reglementare privind excepțiile
--	---

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	Nu există substanțe periculoase peste valorile limită

EU REACH SVHC

Trimitere la substanța candidată REACH (nr. CAS)	Nicio substanță cu un procentaj masic mai mare de 0,1 %
--	---

FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/ro/produse/3036893>



Accesorii

FBSC - Protective cap

3012325

<https://www.phoenixcontact.com/ro/produse/3012325>



Covering hood, provides reliable shock protection when using cut-to-length FBS ...-5 and FBS ...-6 bridges, color: red

CUTFOX-FBS - Front cutter

1212124

<https://www.phoenixcontact.com/ro/produse/1212124>



Cutting tool, for separating individual jumper bars from FBS ... plug-in bridges and EB ... insertion bridges

Phoenix Contact 2024 © - Toate drepturile rezervate
<https://www.phoenixcontact.com>

PHOENIX CONTACT România
Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1
Bucuresti 030133
+40 21 350 88 12 - 3
sales.ro@phoenixcontact.com