

NEOZED, fuse base, D02, 3-pole, 63 A, Un AC: 400 V, Un DC: 250 V incoming terminal: saddle terminal outgoing terminal: saddle terminal



| Model                                                                               |                               |
|-------------------------------------------------------------------------------------|-------------------------------|
| product brand name                                                                  | SETRON                        |
| product designation                                                                 | NEOZED fuse bases             |
| design of the product                                                               | NEOZED fuse base installation |
| General technical data                                                              |                               |
| number of poles                                                                     | 3                             |
| size of fuse system according to EN 60269-1                                         | D02                           |
| Supply voltage                                                                      |                               |
| operating voltage rated value                                                       | 400 V                         |
| Dissipation                                                                         |                               |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 3 W                           |
| Main circuit                                                                        |                               |
| operational current rated value                                                     | 63 A                          |
| Product details                                                                     |                               |
| product component cover                                                             | Yes                           |
| Mechanical Design                                                                   |                               |
| height                                                                              | 59 mm                         |
| width                                                                               | 80.8 mm                       |
| depth                                                                               | 41 mm                         |
| fastening method                                                                    | DIN rail                      |
| Net Weight                                                                          | 291 g                         |
| material of D fuse base                                                             | porcelain                     |
| Approvals Certificates                                                              |                               |
| Environment                                                                         | General Product Approval      |

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)



| Further information                                                                                                                                               |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Information on the packaging                                                                                                                                      |  |
| <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                           |  |
| Information for data generation and storage                                                                                                                       |  |
| <a href="https://support.industry.siemens.com/cs/ww/en/view/109995012">https://support.industry.siemens.com/cs/ww/en/view/109995012</a>                           |  |
| Information- and Downloadcenter (Catalogs, Brochures,...)                                                                                                         |  |
| <a href="https://www.siemens.com/lowvoltage/catalogs">https://www.siemens.com/lowvoltage/catalogs</a>                                                             |  |
| Industry Mall (Online ordering system)                                                                                                                            |  |
| <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SG5653">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SG5653</a> |  |
| Service&Support (Manuals, Certificates, Characteristics, FAQs,...)                                                                                                |  |

<https://support.industry.siemens.com/cs/ww/en/ps/5SG5653>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SG5653](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG5653)

CAX-Online-Generator



<https://www.siemens.com/cax>

Tender specifications


<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

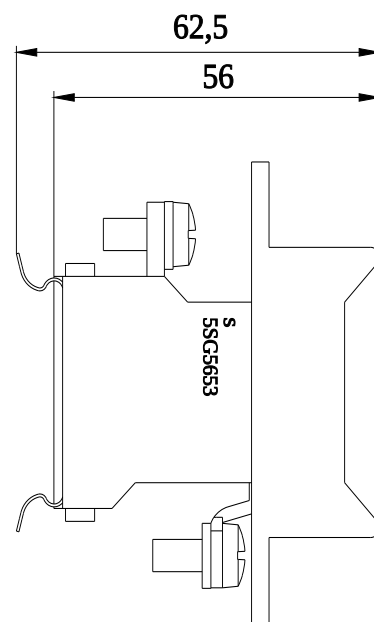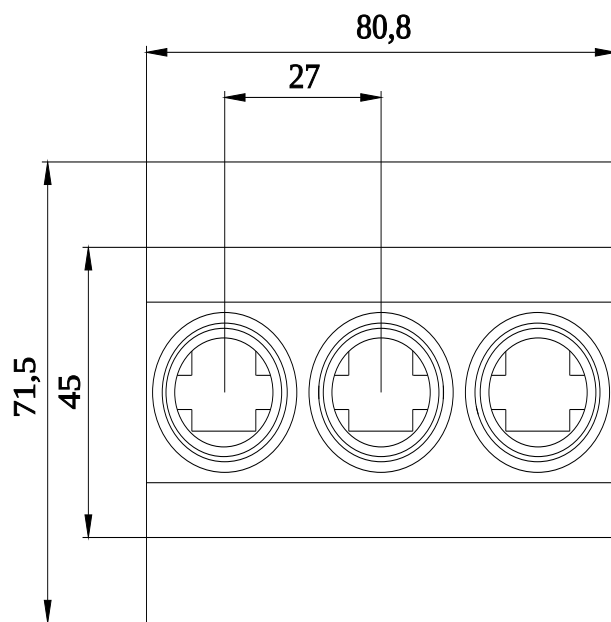

**-F**

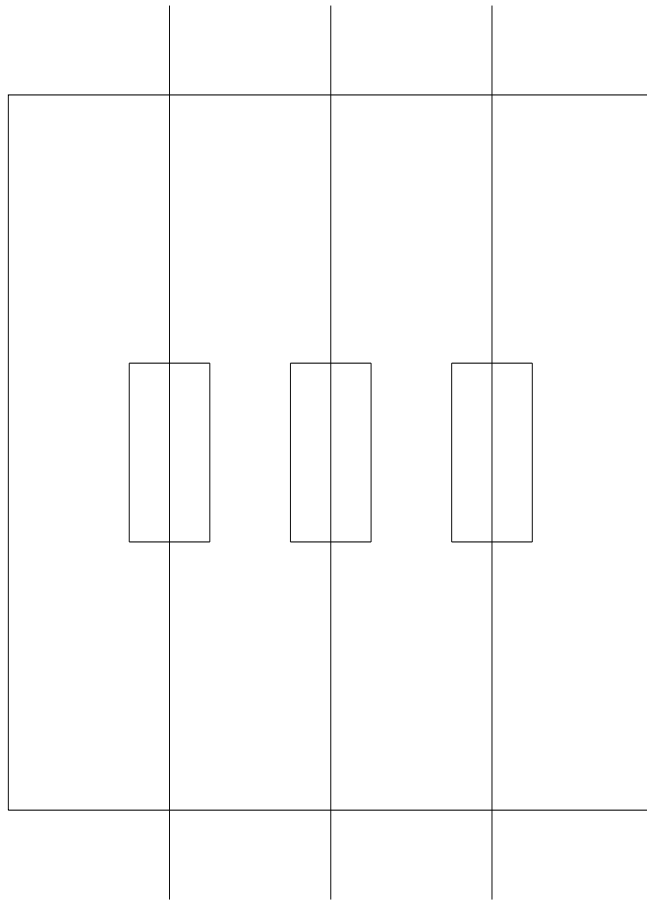

last modified:

4/6/2026 

