



auxiliary switch, 1 NO + 1 NC for miniature circuit breakers 5SL, 5SY, 5SP, incorporated switch 5TL1, RCBO 5SU1 (without 5SU1...FP/FR), RCCB 5SV (for 5SU1, handle coupler 5ST3805-1 is required)

Model	
product brand name	SENTRON
product designation	auxiliary switches
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Voltage	
insulation voltage rated value	440 V
surge voltage resistance rated value	4 kV
Current	
operational current at DC rated value	0.01 A
Supply voltage	
supply voltage at DC rated value	
• minimum	12 V
operating voltage	
• rated value	400 V
• at AC rated value minimum	12 V
• at DC rated value minimum	12 V
protection class IP	IP20
Control current	
type of voltage of control voltage	AC/DC
Product details	
product component	
• auxiliary switch	Yes
number of fault signal contacts	0
number of NC contacts	1
number of NO contacts	1
number of CO contacts	0
product extension can be mounted	Universal
product extension	auxiliary switch
product function test function for fault current trip	No
Connections	
connectable conductor cross-section	
• minimum	0.5 mm <sup>2</sup>
• maximum	2.5 mm <sup>2</sup>
AWG number as coded connectable conductor cross section	
• minimum	24
• maximum	12

<b>tightening torque with screw-type terminals</b>	
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	0.5 N·m
<b>Mechanical Design</b>	
<b>height</b>	90 mm
<b>width</b>	9 mm
<b>depth</b>	70 mm
<b>number of modular width units</b>	0.5
<b>Net Weight</b>	49.7 g
<b>Environmental conditions</b>	
<b>standard</b>	IEC/EN60947-5-1; IEC/EN62019
<b>ambient temperature during operation</b>	
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	-25 °C 55 °C
ambient temperature during storage minimum	-40 °C
<b>Approvals Certificates</b>	
Environmental Product Declaration	
<ul style="list-style-type: none"> <li>• global warming potential [CO2 eq] / during manufacturing</li> <li>• global warming potential [CO2 eq] / during operation</li> <li>• global warming potential [CO2 eq] / after end of life</li> <li>• global warming potential [CO2 eq] / total</li> </ul>	0.527 kg 3.52 kg 0.0548 kg 4.1 kg
<b>Environment</b>	<b>General Product Approval</b>

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)



**General Product Approval**

**Maritime application**



[Miscellaneous](#)



**Further information**

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3010>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3010>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3010](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3010)

**CAX-Online-Generator**



<https://www.siemens.com/cax>


**Tender specifications**

<https://www.siemens.com/specifications>

**Characteristic curves**

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

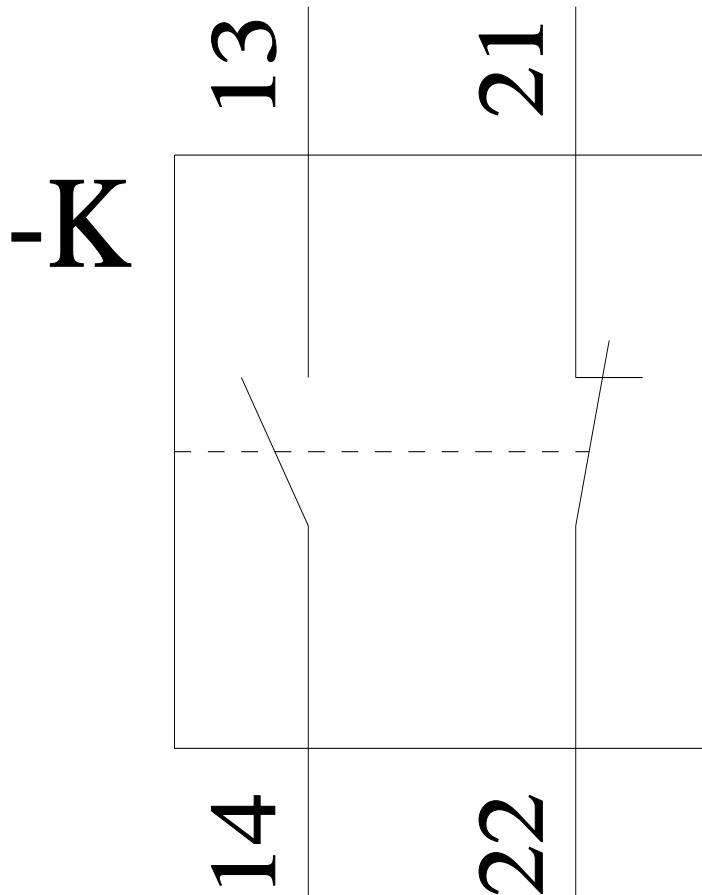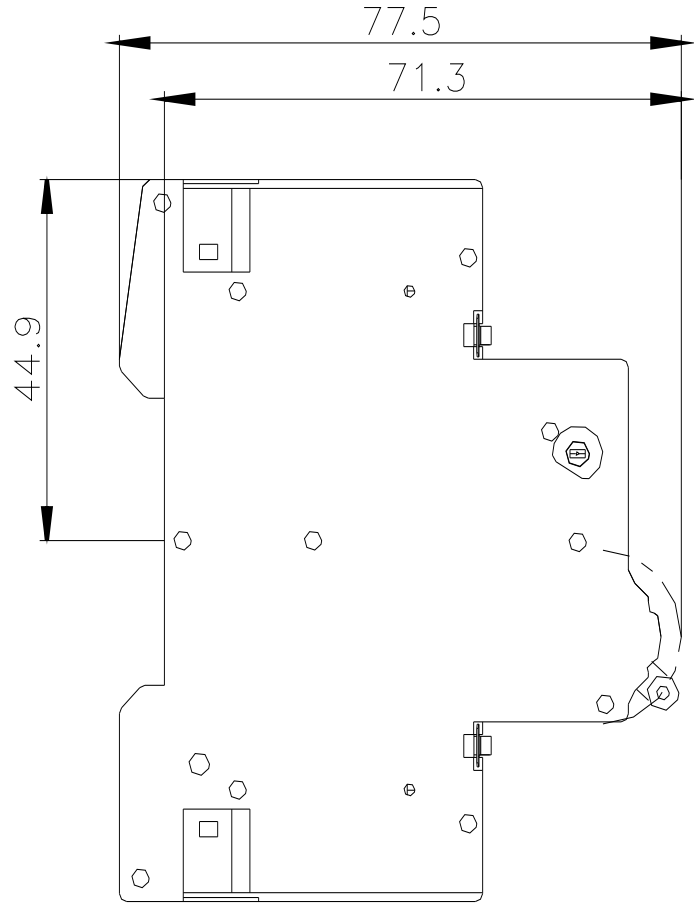

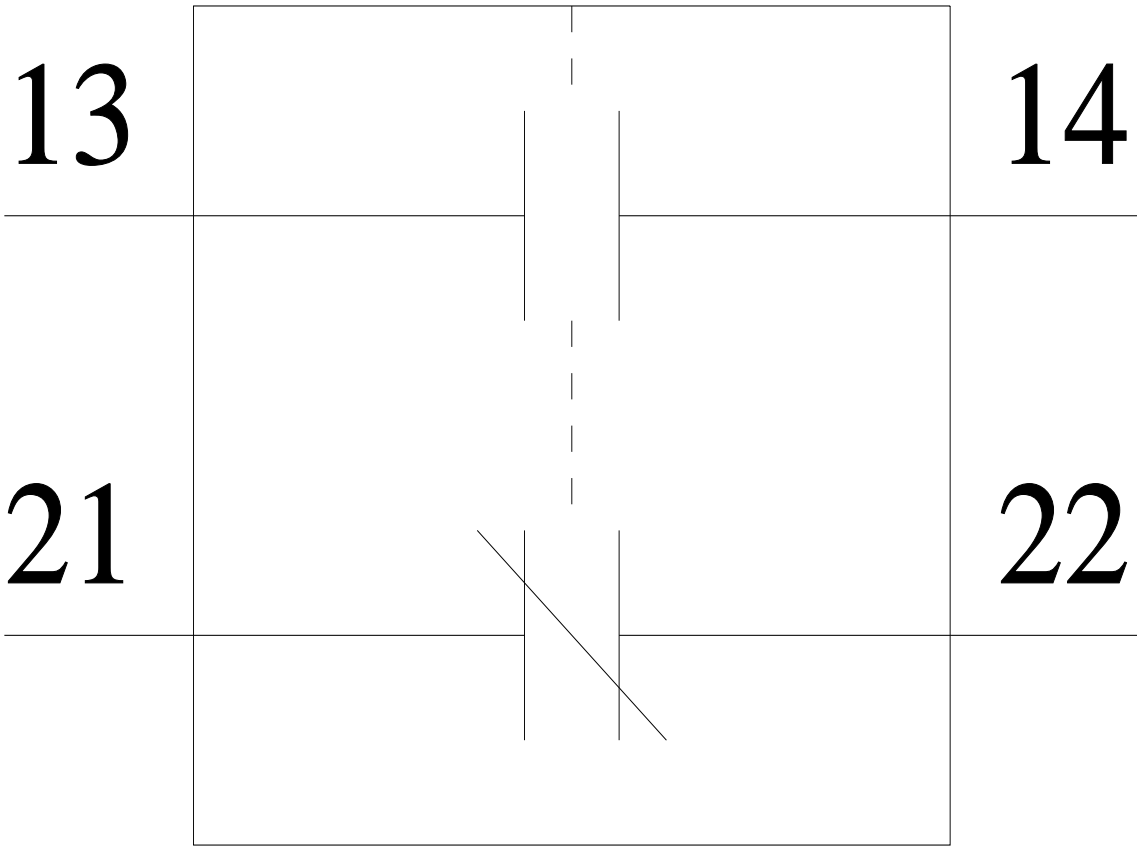

last modified:

11/24/2025 

