



auxiliary switch with test button 1 NO + 1 NC for miniature circuit breakers 5SL, 5SY, 5SP, incorporated switch 5TL1, RCBO 5SU1 (without 5SU1...FP/FR), RCCB 5SV (for 5SU1, handle coupler 5ST3805-1 is required)

Model	
product brand name	SENTRON
product designation	auxiliary switches
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Voltage	
insulation voltage rated value	440 V
Current	
operational current at DC rated value	0.05 A
Supply voltage	
supply voltage at DC rated value	
• minimum	24 V
operating voltage	
• at AC rated value minimum	24 V
• at DC rated value minimum	24 V
protection class IP	IP20
Control current	
type of voltage of control voltage	AC/DC
Product details	
product component	
• auxiliary switch	Yes
number of fault signal contacts	0
number of NC contacts	1
number of NO contacts	1
number of CO contacts	0
product extension can be mounted	Universal
product extension	auxiliary switch
Connections	
connectable conductor cross-section	
• minimum	0.5 mm ²
• maximum	2.5 mm ²
AWG number as coded connectable conductor cross section	
• minimum	24
• maximum	12
tightening torque with screw-type terminals	
• maximum	0.5 N·m
Mechanical Design	

height	90 mm
width	9 mm
depth	70 mm
number of modular width units	0.5
Net Weight	68 g

Environmental conditions

standard	IEC/EN60947-5-1; IEC/EN62019; GB14048.5
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage minimum	-40 °C

Approvals Certificates

Environmental Product Declaration	
• global warming potential [CO2 eq] / during manufacturing	0.527 kg
• global warming potential [CO2 eq] / during operation	3.52 kg
• global warming potential [CO2 eq] / after end of life	0.0548 kg
• global warming potential [CO2 eq] / total	4.1 kg

Environment	General Product Approval
-------------	--------------------------

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Miscellaneous](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3010-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3010-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3010-2

CAX-Online-Generator




<https://www.siemens.com/cax>


Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

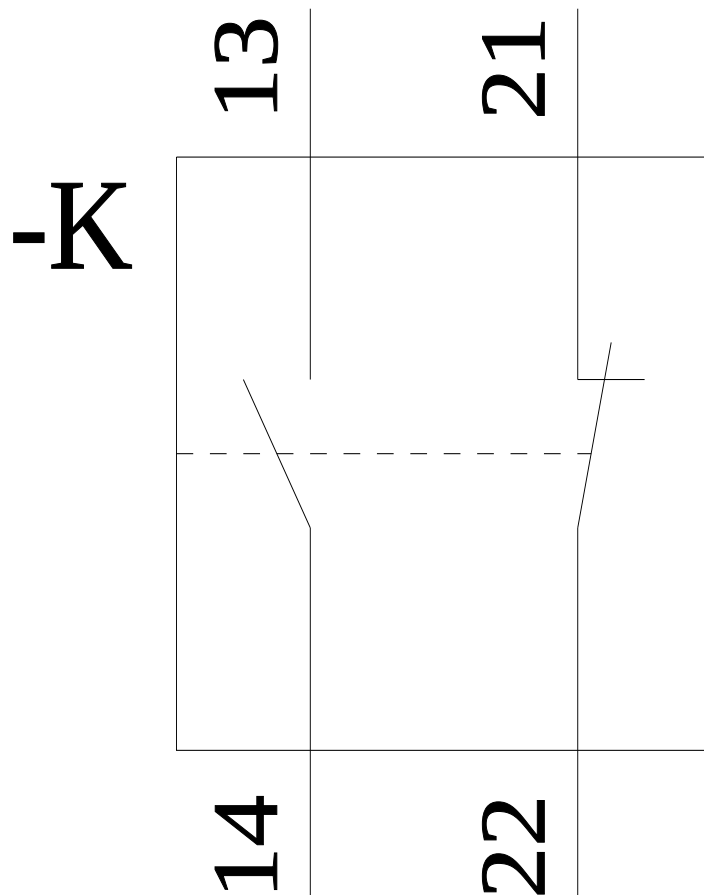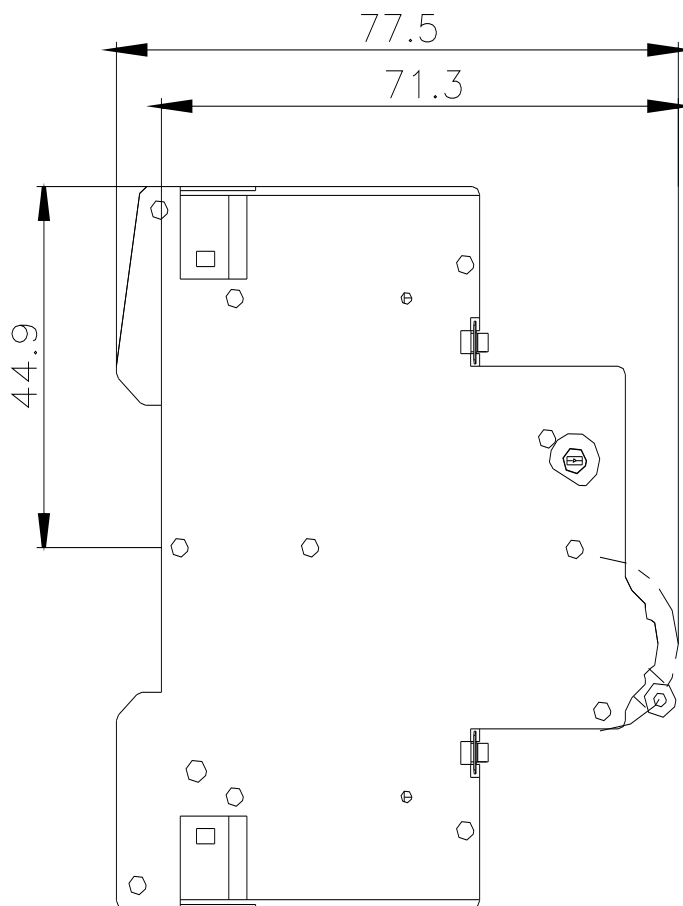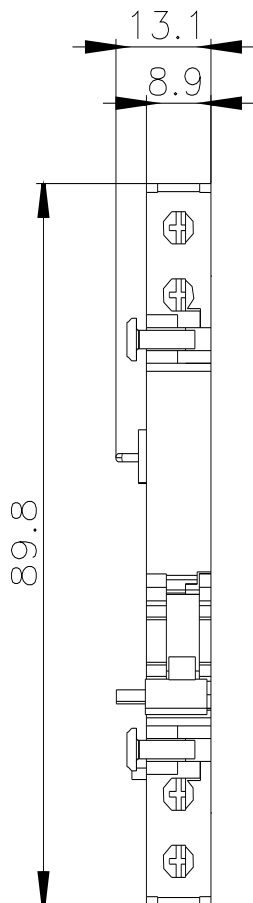

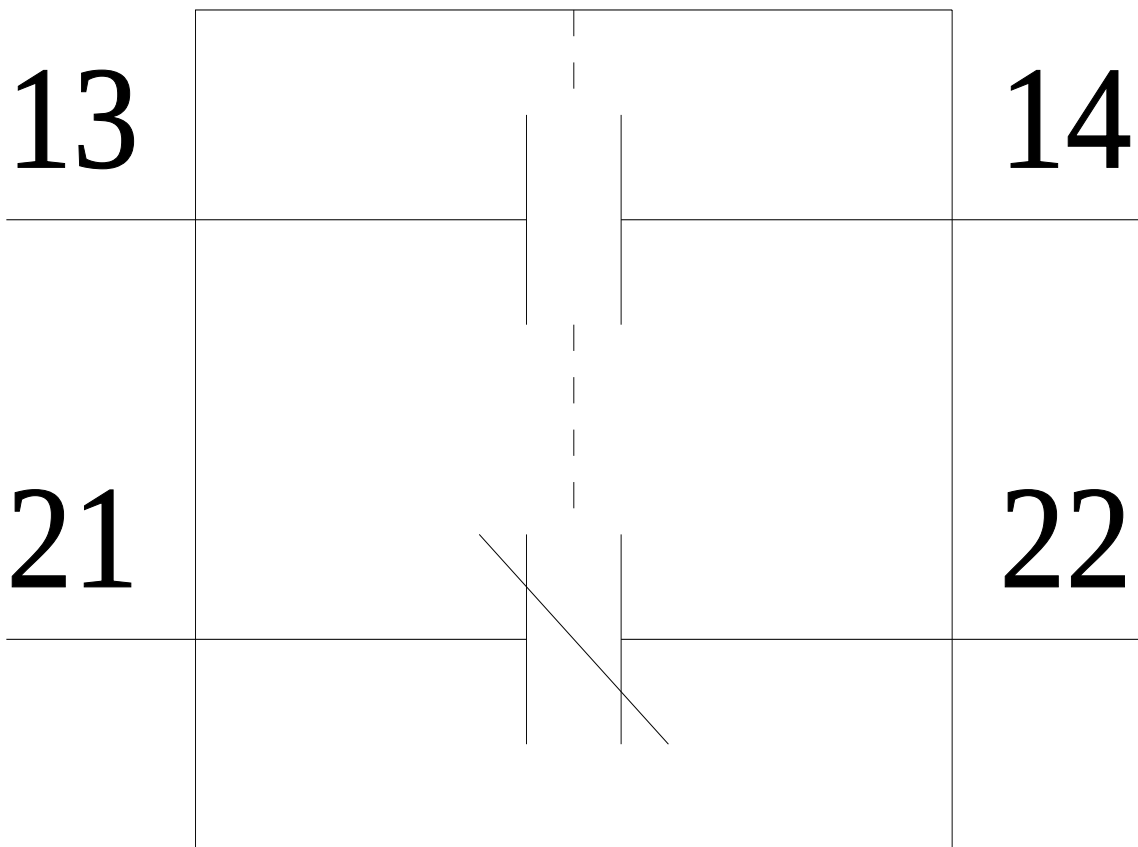

last modified:

11/24/2025 

