


Cover 3VA13 (400 A), 3VA14 (630 A), 3VA23 (400 A), 3VA24 (630 A), 4-pole, fixed-mounted, plug-in socket, drive: direct, front-mounted rotary operator motorized operating mechanism, RCD: without, H: 250 mm W: 600 mm

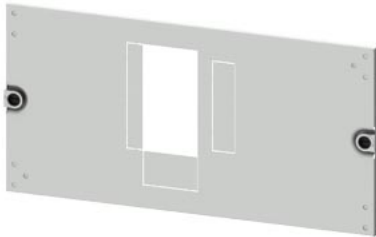

Model	
product brand name	SIVACON S4
product designation	3VA masking frame
design of the surface	powder-coated
height	250 mm
width	600 mm
depth	10 mm
installation width for cabinet installation	600 mm
mounting height for device equipment can be used	250 mm
Net Weight	1.183 kg
material	sheet-steel
reference code according to IEC 81346-2	UC

Approvals Certificates	
Environment	General Product Approval

[Environmental Con-
firmations](#)



[Environmental Con-
firmations](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8PQ2025-6BA23>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8PQ2025-6BA23>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8PQ2025-6BA23

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

last modified:

8/7/2025 