

EEM-MA370-R - Measuring device



2907980

<https://www.phoenixcontact.com/ro/produse/2907980>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Multi-functional energy measuring device with integrated Modbus RTU/TCP interface for measuring electrical parameters in low-voltage installations up to 690 V. (phoenixcontact.com/empro-help)

Date comerciale

Număr articol	2907980
Unitate de ambalare	1 Bucată
Cantitate minimă pentru comandă	1 Bucată
Cod produs	CK4C21
Pagina de catalog	Pagina 203 (C-5-2019)
GTIN	4055626260570
Greutate pe bucată (inclusiv ambalajul)	337,49 g
Greutate pe bucată (fără ambalaj)	293,74 g
Cod tarifar vamal	90303100
Țara de origine	DE

EEM-MA370-R - Measuring device



2907980

<https://www.phoenixcontact.com/ro/produse/2907980>

Date tehnice

Product properties

Product type	Energy measuring device
Product family	EMpro

Data management status

Article revision	08
------------------	----

Electrical properties

Maximum power dissipation for nominal condition	10 VA
Mains type	3-phase (3 or 4-conductor), 2-phase (2-conductor), and single-phase (1-conductor)

Electrical isolation

Test voltage	4 kV AC (50 Hz, 60 s)
Pollution degree	2
Insulation	Reinforced insulation

Electrical isolation Housing against all potentials IEC 61010-1

Standards/regulations	IEC 61010-1
Overvoltage category	III (300 V AC) II (600 V AC)
Insulation	Reinforced insulation

Electrical isolation Supply against all other potentials IEC 61010-1

Standards/regulations	IEC 61010-1
Overvoltage category	III (300 V AC) II (600 V AC)
Insulation	Reinforced insulation

Electrical isolation Voltage measurement input against all other potentials IEC 61010-2-030

Standards/regulations	IEC 61010-2-030
Measuring category	III (300 V AC) II (600 V AC)
Insulation	Reinforced insulation

Electrical isolation Current measurement input against all other potentials

Insulation	Functional insulation
------------	-----------------------

Electrical isolation Digital I/Os

Insulation	Functional insulation
------------	-----------------------

Electrical isolation Communication interface

Insulation	Functional insulation
------------	-----------------------

Supply

Supply voltage range	100 V AC ... 230 V AC ($\pm 20\%$)
----------------------	--------------------------------------

EEM-MA370-R - Measuring device



2907980

<https://www.phoenixcontact.com/ro/produse/2907980>

	150 V DC ... 250 V DC ($\pm 20\%$)
Power consumption	≤ 4 W
Nominal frequency	50 Hz ... 60 Hz (AC sine)

Input data

General

Measuring principle	True RMS value measurement (TRMS)
Measured value	AC sine (50 Hz/60 Hz)
Acquisition of harmonics	up to 63rd harmonic
Description of the input	Digital input in accordance with IEC/EN 61131-2 (type 3)
Number	1
Voltage input signal	24 V DC 0 V DC ... 30 V DC
Current input signal	2 mA ... 15 mA
Protection	250 mA (fast-blow)
Protective circuit	Protection against incorrect DC connection (max. 30 V)

Measurement: Voltage

Input name	Voltage measuring input V1, V2, V3
Input voltage range direct	35 V AC ... 690 V AC (Phase/Phase) 20 V AC ... 400 V AC (Phase/neutral conductor)
Input voltage range via external transformers	60 V AC ... 2000000 V AC (primary) 60 V AC ... 400 V AC (secondary)
Surge voltage capacity	760 V AC (Phase/Phase)
Precision	0.2 %
Power consumption	< 2 VA

Measurement: Current

Input name	Current measurement I1, I2, I3
Input current	1 A (secondary) 5 A (secondary)
Measuring range	1 A ... 20000 A (primary)
Overload capacity	6 A (I_{max})
Response threshold from measuring range nominal value	10 mA (1 A) 50 mA (5 A)
Precision	0.2 %
Current overload	50 A for 1 s 20 A ($4 \times I_N$, continuous)
Power consumption	< 0.5 VA

Measurement: Power

Precision	0.5 %
Active energy (IEC 62053-22)	Class 0.5 S
Reactive power (IEC 62053-23)	Class 2
ANSI C12.20	Class 0.5 S

Output data

Output description	Digital output in accordance with IEC/EN 61131-2 (type 3)
Number	1
Current output signal	≤ 100 mA
Voltage output signal	24 V DC
Protection	250 mA (fast-blow)
Protective circuit	Protection against incorrect DC connection (max. 30 V)

Connection data

Current / voltage / supply

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 6 mm ²
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section AWG	24 ... 10
Tightening torque	0.5 Nm ... 0.6 Nm

Digital I/O / communication

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section AWG	26 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm

RS-485

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Tightening torque	0.5 Nm ... 0.6 Nm

Interfaces

Data: Network interface

Communication protocol	Modbus/TCP
	REST
Connection method	RJ45

Data: Network interface

Communication protocol	Modbus/RTU
------------------------	------------

EEM-MA370-R - Measuring device



2907980

<https://www.phoenixcontact.com/ro/produse/2907980>

Communication standard	RS-485
Connection method	Screw connection
Transmission speed range	2.4 kbps ... 115.2 kbps
Resistance	120 Ω (integrated)

Dimensions

Width	90 mm
Height	80 mm
Depth	64 mm

Material specifications

Color	gray (RAL 7042)
-------	-----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection (Housing)	IP20 (Housing)
Degree of protection (Display)	IP40 (Display)
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-30 °C ... 80 °C
Altitude	$\leq$ 2000 m
Max. permissible relative humidity (operation)	$\leq$ 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UKCA

Certificate	UKCA-compliant
-------------	----------------

UL, USA/Canada

Identification	UL/C-UL Listed UL 61010-1
----------------	---------------------------

UL data

Operating mode	Indoor use
----------------	------------

Standards and regulations


Standards/regulations	IEC 61010-1
	IEC 61326-1
	IEC 61557-12

Mounting

Mounting type	DIN rail mounting
Mounting position	Horizontal DIN rail


Desene

Connection diagram

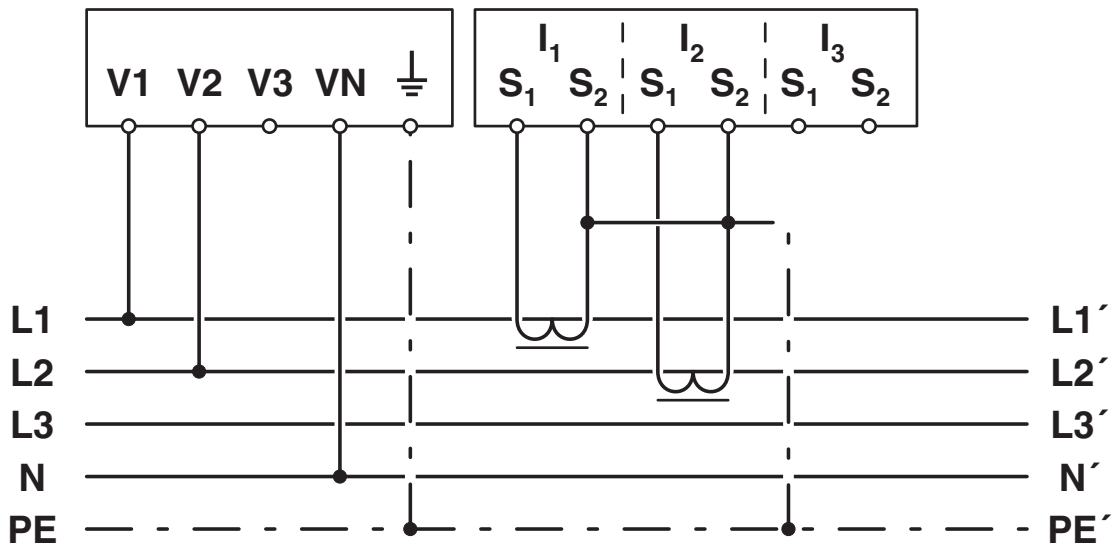

Network type: 2PH-3W-2CT

Connection diagram

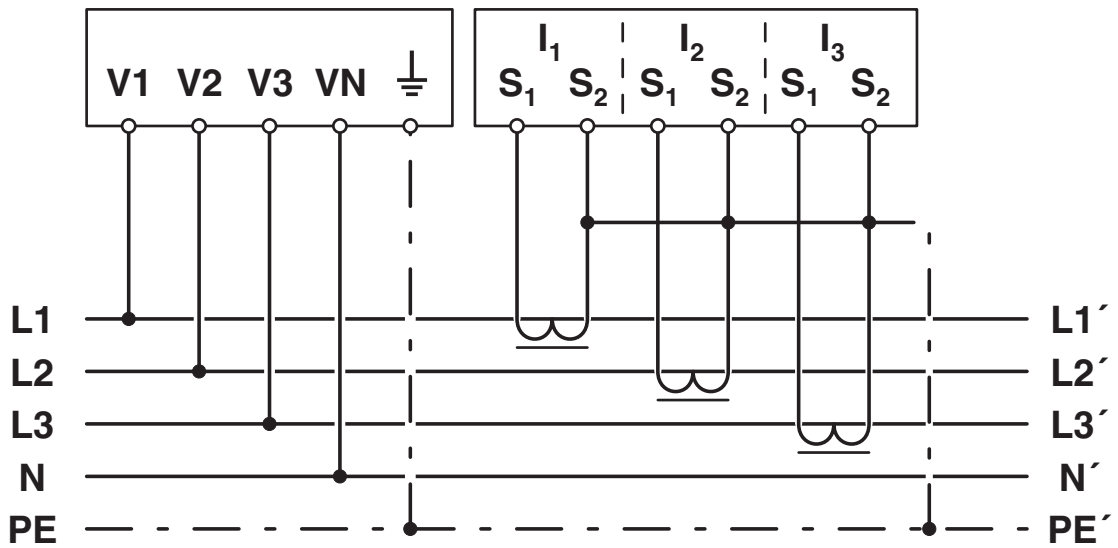

Network type: 3PH-4W-3CT


EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>



Schematic diagram

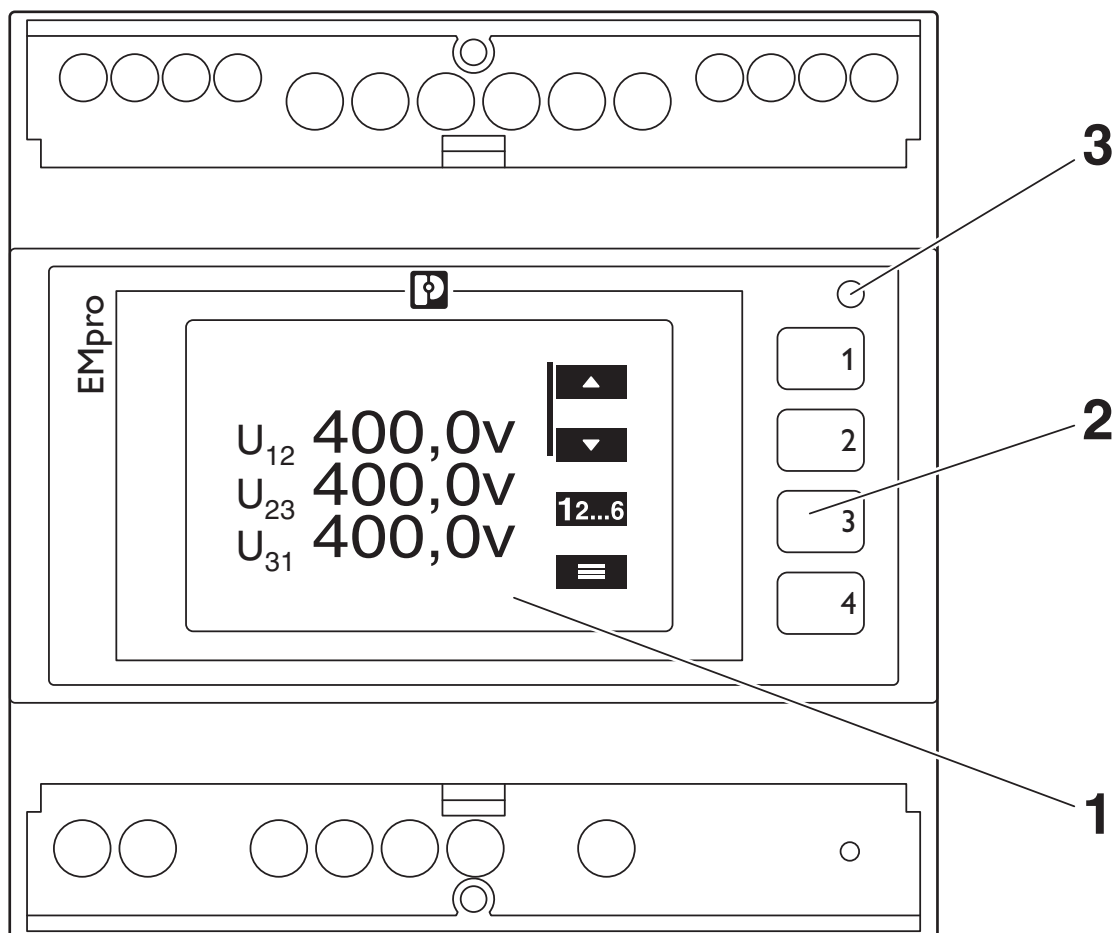


Operating and indication elements

1 LCD, backlit

2 Operating buttons for displaying measured values and for changing the configuration

3 Pulse LED

Connection diagram

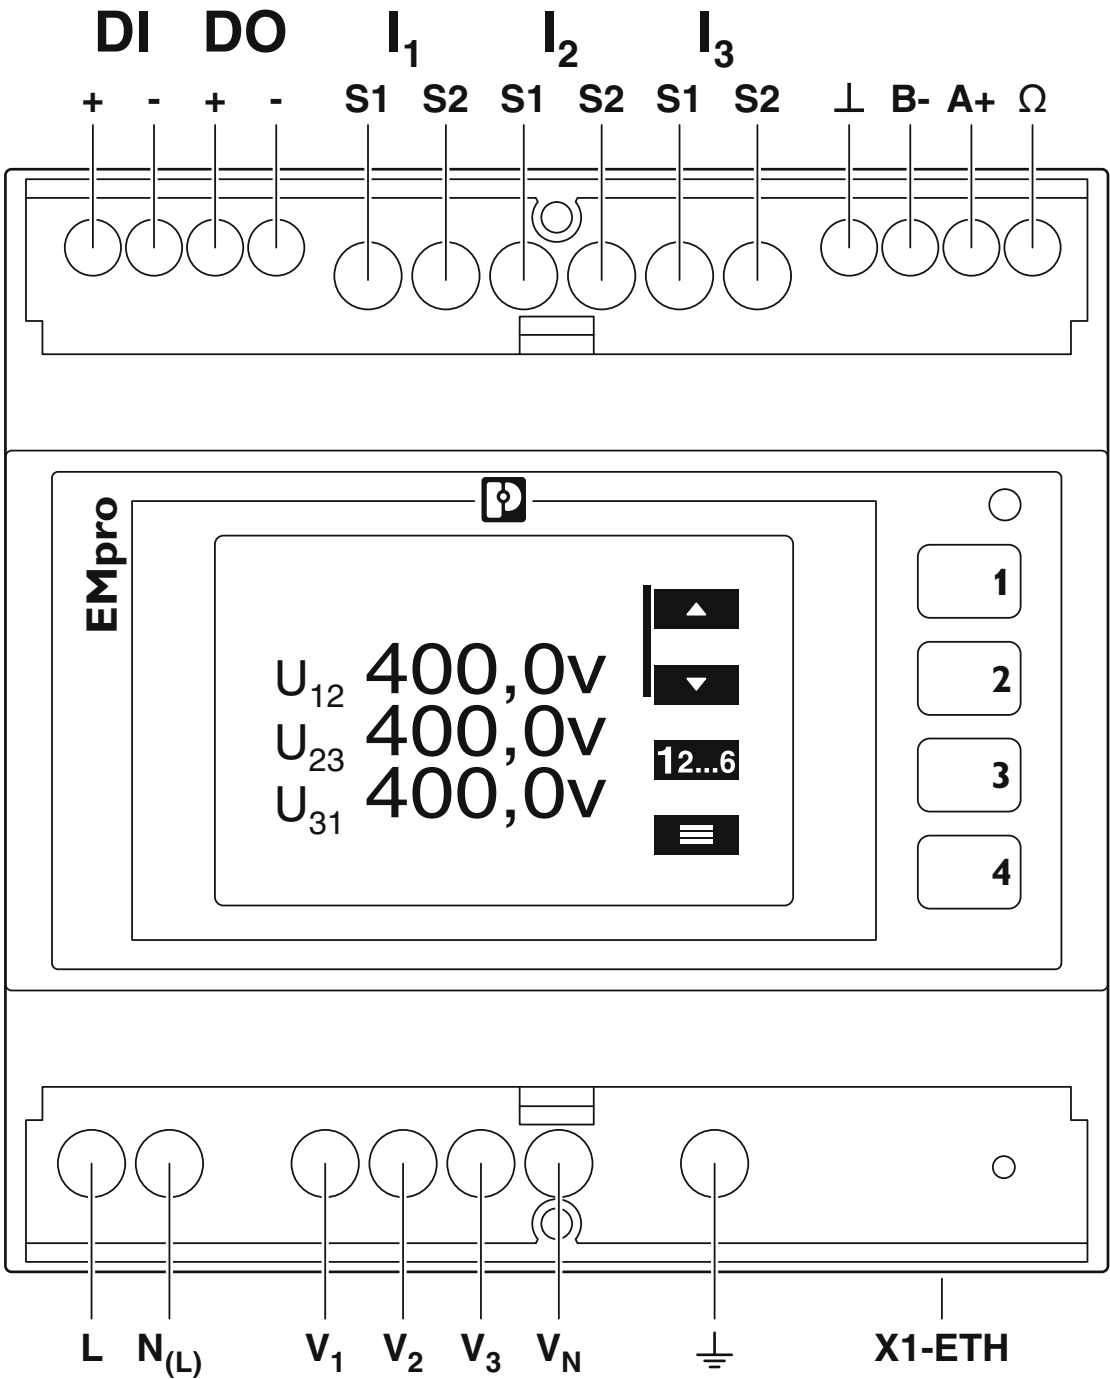

Pin assignment


EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>




Schematic diagram

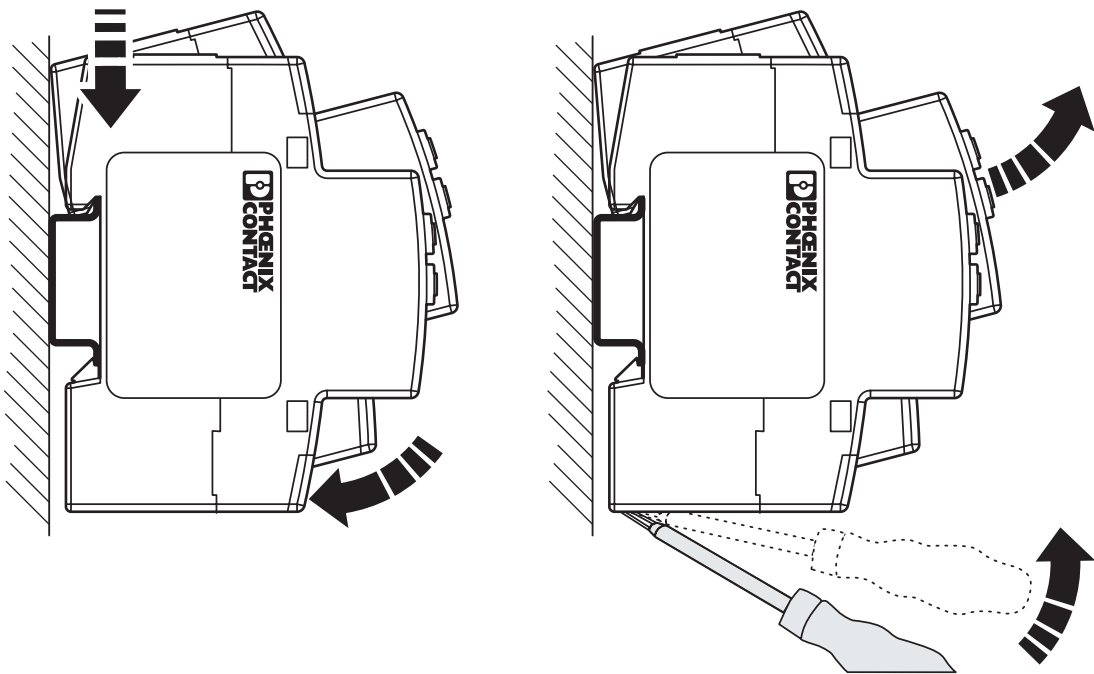


Mounting

Connection diagram

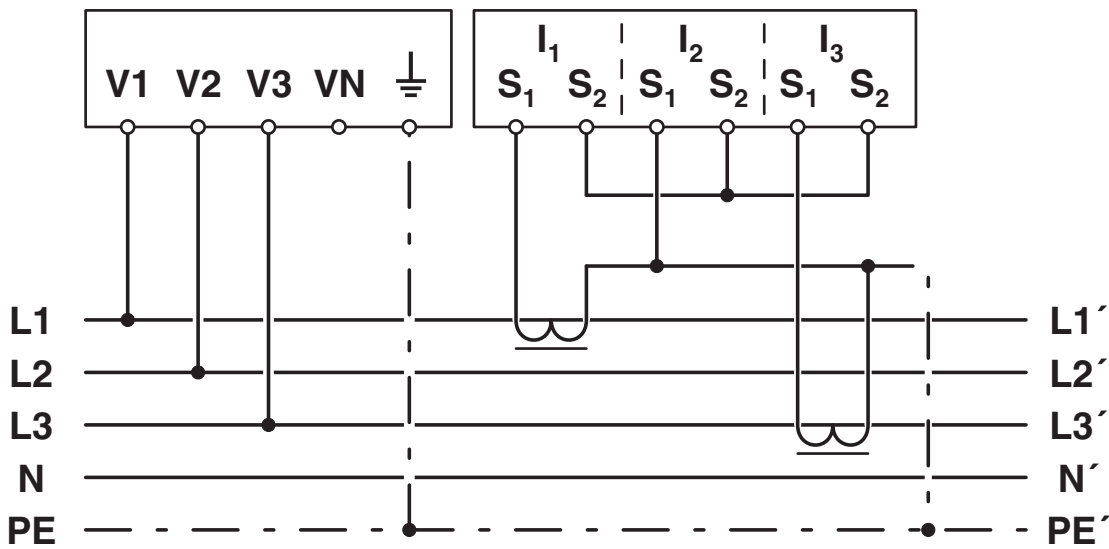


Network type: 3PH-3W-2CT

Connection diagram

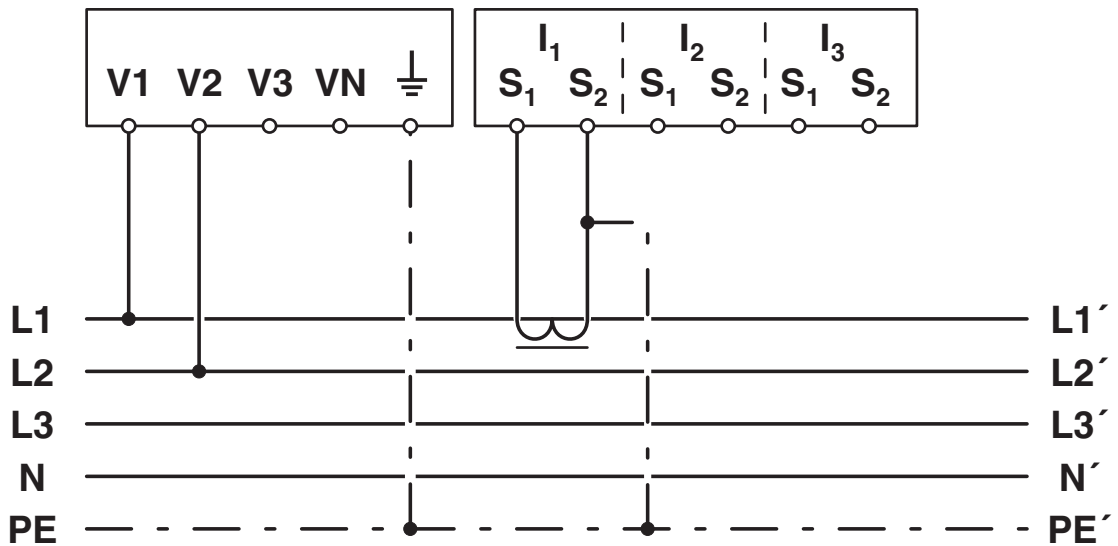


Network type: 2PH-2W-1CT

Connection diagram

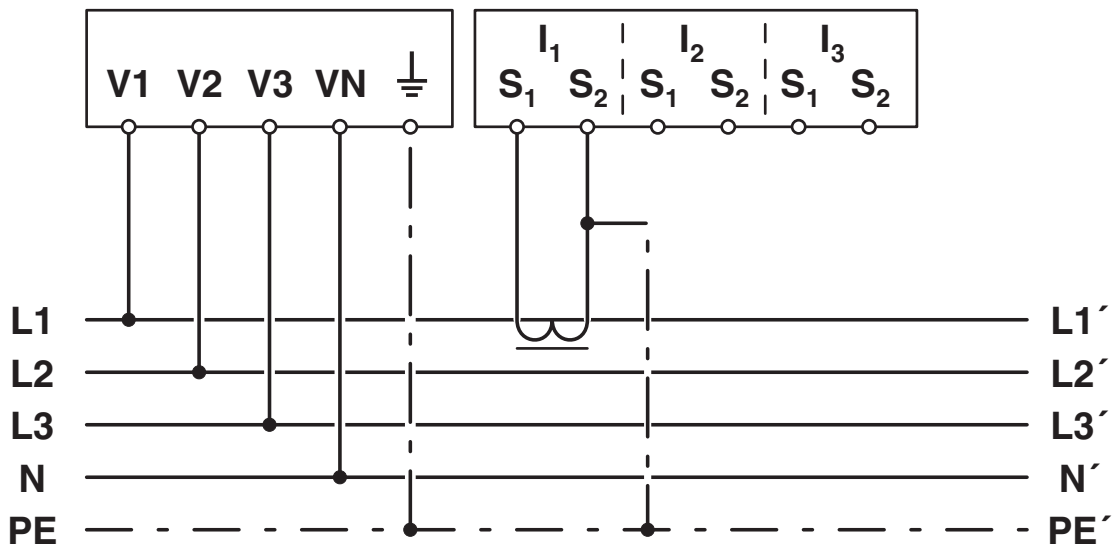


Network type: 3PH-4W-1CT

Connection diagram

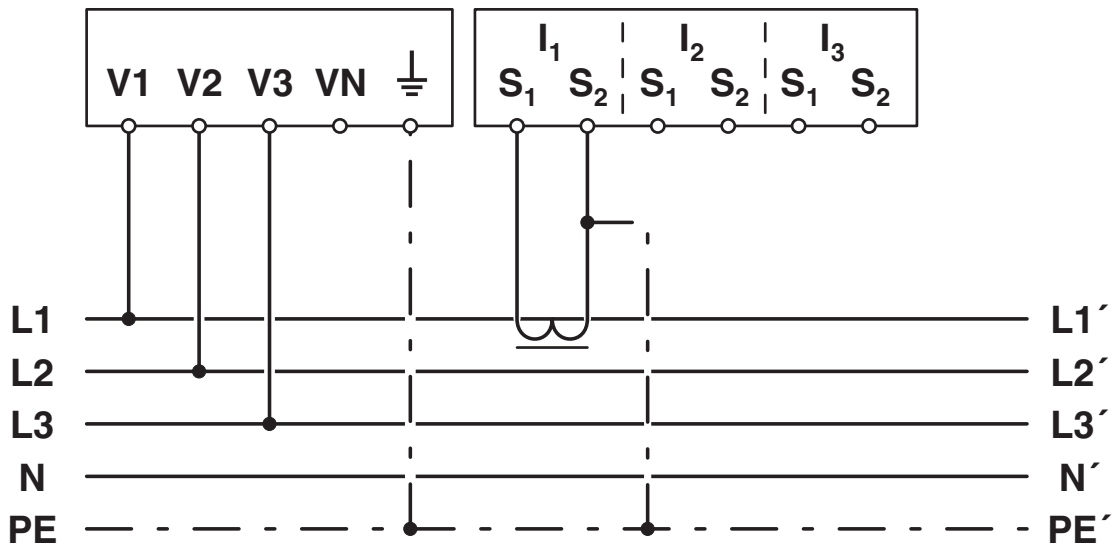


Network type: 3PH-3W-1CT

Connection diagram

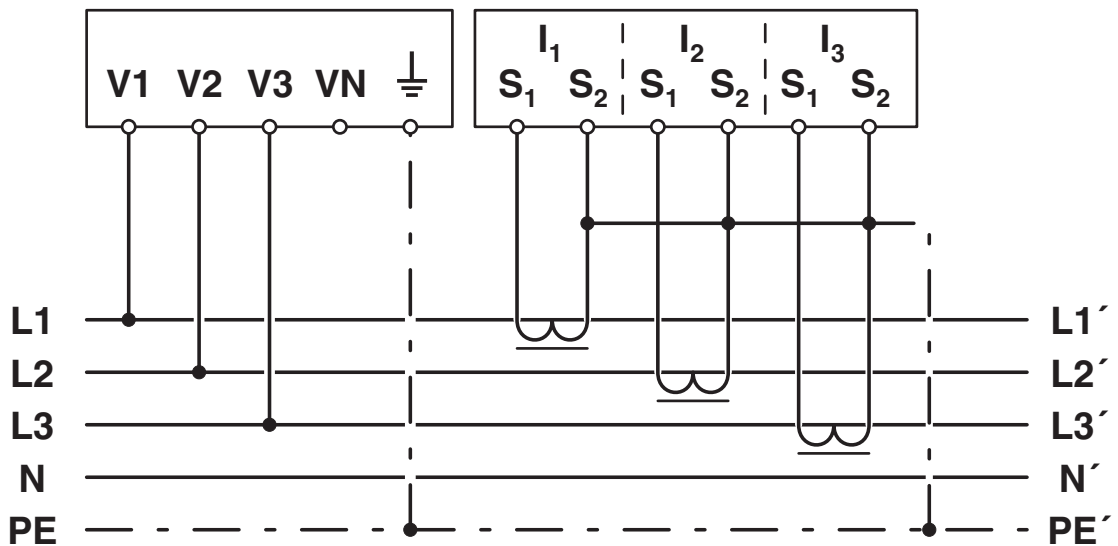

Network type: 3PH-3W-3CT

Connection diagram

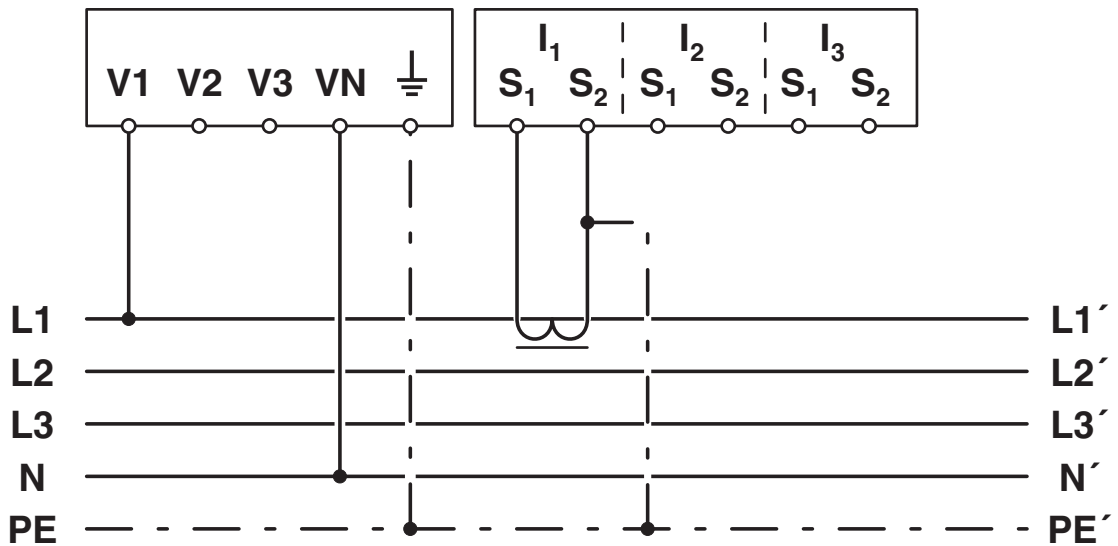

Network type: 1PH-2W-1CT

EEM-MA370-R - Measuring device



2907980

<https://www.phoenixcontact.com/ro/produse/2907980>

Aprobări

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/produse/2907980>



EAC
ID de înregistrare: RU*DE*08.B.00734/19



UL Listed
ID de înregistrare: E357804



cUL Listed
ID de înregistrare: E357804

cULus Listed

EEM-MA370-R - Measuring device



2907980

<https://www.phoenixcontact.com/ro/produse/2907980>

Clasificări

ECLASS

ECLASS-11.0	27142330
ECLASS-12.0	27142330
ECLASS-13.0	27142330

ETIM

ETIM 9.0	EC002301
----------	----------

UNSPSC

UNSPSC 21.0	41113600
-------------	----------

EEM-MA370-R - Measuring device



2907980
<https://www.phoenixcontact.com/ro/produse/2907980>

Environmental product compliance

EU RoHS	
Îndeplinește cerințele conform directivei RoHS	Da
reglementări excepționale, dacă sunt cunoscute	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	Un tabel de declarații China RoHS legat de articol poate fi găsit în zona de descărcare a articolului respectiv la „Declarația producătorului”. Nu se emite și nu este necesar niciun tabel de declarații China RoHS pentru toate articolele EFUP-E.
EU REACH SVHC	
Trimitere la substanța candidată REACH (nr. CAS)	Lead(nr. CAS: 7439-92-1)
SCIP	58f34caa-8150-4f25-a3cb-543dfee16673

EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>



Accesorii

PACT MCR-V1-21-44 - Current transformer

2277268

<https://www.phoenixcontact.com/ro/produse/2277268>



Bus-bar current transformer, primary current can be selected between 50...500 A AC; secondary current can be selected as 1 A AC or 5 A AC; accuracy class can be selected as 0.5 or 1; rated power can be selected

PACT MCR-V2- 3015- 60 - Current transformer

2277271

<https://www.phoenixcontact.com/ro/produse/2277271>



Window-type current transformer, primary current can be selected between 50...750 A AC; secondary current can be selected as 1 A AC or 5 A AC; accuracy class can be selected as 0.5 or 1; rated power can be selected

EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>



PACT MCR-V2-3015-60-PT - Current transformer

2907413

<https://www.phoenixcontact.com/ro/produse/2907413>



Window-type current transformer with screw and Push-in connection technology, conductor connection for Push-in: from directly above, no tools required. The following can be selected: primary current (50 ... 750) A AC, secondary current (1 or 5) A AC, accuracy class 0.5 or 1, VA power

PACT MCR-V2- 4012- 70 - Current transformer

2277284

<https://www.phoenixcontact.com/ro/produse/2277284>



Window-type current transformer, primary current can be selected between 75... 1000 A AC; secondary current can be selected as 1 A AC or 5 A AC; accuracy class can be selected as 0.5 or 1; rated power can be selected

EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>



PACT MCR-V2-4012-70-PT - Current transformer

2907414

<https://www.phoenixcontact.com/ro/produse/2907414>



Window-type current transformer with screw and Push-in connection technology, conductor connection for Push-in: from directly above, no tools required. The following can be selected: primary current (100 ... 1000) A AC, secondary current (1 or 5) A AC, accuracy class 0.5 or 1, VA power

PACT MCR-V2- 5012- 85 - Current transformer

2277297

<https://www.phoenixcontact.com/ro/produse/2277297>



Window-type current transformer, primary current can be selected between 100..1500 A AC; secondary current can be selected as 1 A AC or 5 A AC; accuracy class can be selected as 0.5 or 1; rated power can be selected

EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>



PACT MCR-V2-5012-85-PT - Current transformer

2907416

<https://www.phoenixcontact.com/ro/produse/2907416>



Window-type current transformer with screw and Push-in connection technology, conductor connection for Push-in: from directly above, no tools required. The following can be selected: primary current (100 ... 1500) A AC, secondary current (1 or 5) A AC, accuracy class 0.5 or 1, VA power

PACT MCR-V2- 6015- 85 - Current transformer

2277336

<https://www.phoenixcontact.com/ro/produse/2277336>



Window-type current transformer, primary current can be selected between 200 . . . 1,250 A AC; secondary current can be selected as 1 A AC or 5 A AC; accuracy class can be selected as 0.5 or 1; rated power can be selected

EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>



PACT MCR-V2-6015-85-PT - Current transformer

2907417

<https://www.phoenixcontact.com/ro/produse/2907417>




Window-type current transformer with screw and Push-in connection technology, conductor connection for Push-in: from directly above, no tools required. The following can be selected: primary current (200 ... 1600) A AC, secondary current (1 or 5) A AC, accuracy class 0.5 or 1, VA power

PACT MCR-V2-10020-129 - Current transformer

2277378

<https://www.phoenixcontact.com/ro/produse/2277378>



Window-type current transformer, primary current can be selected between 800 and 4,000 A AC, secondary current can be selected 1 A AC or 5 A AC, accuracy class can be selected 0.5 or 1, rated power can be selected

EEM-MA370-R - Measuring device

2907980

<https://www.phoenixcontact.com/ro/produse/2907980>



PACT MCR-V3-60 - Current transformer

2277417

<https://www.phoenixcontact.com/ro/produse/2277417>



Winding current transformer, primary current can be selected between 1...40 A AC; secondary current can be selected as 1 A AC or 5 A AC; accuracy class can be selected as 0.5 or 1; rated power can be selected

Phoenix Contact 2024 © - Toate drepturile rezervate
<https://www.phoenixcontact.com>

PHOENIX CONTACT România
Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1
Bucuresti 030133
+40 21 350 88 12 - 3
sales.ro@phoenixcontact.com