



Push-in lug size S00/S0

product brand name	SIRIUS
product category	Push-in lugs
product designation	Push-in lugs
design of the product	Can be used for 3UF71.0, 3UF71.1 and 3UF71.2
product type designation	3RV29

**General technical data**

certificate of suitability	CE / UL / CSA / CCC
Substance Prohibittance (Date)	10/01/2009
Net Weight	0.002 kg

**Ambient conditions**

ambient temperature	
• during operation	-20 ... +70 °C
• during storage	-50 ... +80 °C

**Installation/ mounting/ dimensions**

fastening method	clip-on
height	27 mm
width	10 mm
depth	4.7 mm

**Approvals Certificates**

Environment	General Product Approval	Maritime application
-------------	--------------------------	----------------------

[Environmental Confirmations](#)



Maritime application	other
----------------------	-------



[Confirmation](#)

[Miscellaneous](#)

**Further information**

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>  
 Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2928-0B>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2928-0B>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2928-0B>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2928-0B&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2928-0B&lang=en)

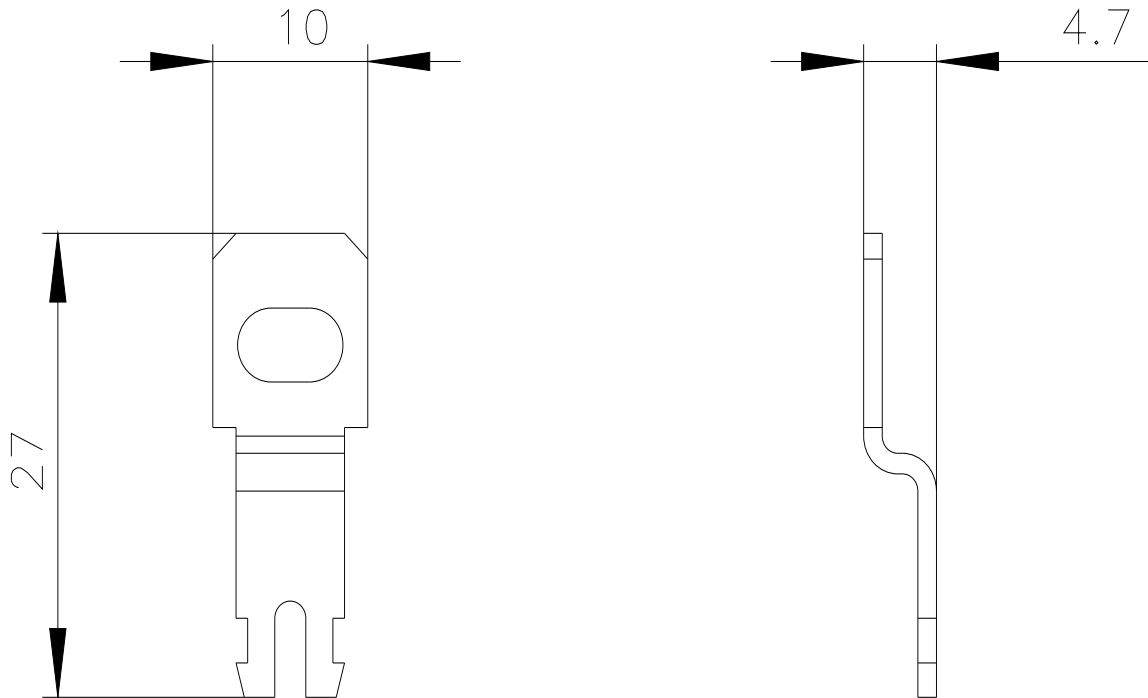

last modified:

4/2/2025 