

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Knife-disconnect terminal block, nom. voltage: 400 V, nominal current: 20 A, 1 level, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², mounting: NS 35/7,5, NS 35/15, color: orange

Avantajele dumneavoastră

- Three and four-conductor terminal blocks can be used for multi-conductor connections
- User-friendly wiring thanks to front connection
- Consistent and can be double bridged for all tasks in time-saving potential supply and distribution
- Compact knife disconnect terminal block with a current carrying capacity of 20 A
- Tested for railway applications
- Test pick-off parallel to the disconnect point for test plugs with 2.3 mm diameter

Date comerciale

Număr articol	3035014
Unitate de ambalare	50 Bucată
Cantitate minimă pentru comandă	50 Bucată
Cod produs	BE2131
GTIN	4017918930196
Greutate pe bucată (inclusiv ambalajul)	8,1 g
Greutate pe bucată (fără ambalaj)	8,084 g
Cod tarifar vamal	85369010
Țara de origine	DE

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

Date tehnice

Product properties

Product type	Disconnect terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1

Data management status

Article revision	02
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²

1 level

Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.08 mm ² ... 4 mm ²
Cross section AWG	28 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	28 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²
Nominal current	20 A (with 4 mm ² conductor cross section)
Maximum load current	20 A (with 4 mm ² conductor cross section)
Nominal voltage	400 V
Nominal cross section	2.5 mm ²

Dimensions

Width	5.2 mm
-------	--------

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

End cover width	2.2 mm
Height	60.5 mm
Depth on NS 35/7,5	36.5 mm
Depth on NS 35/15	44 mm

Material specifications

Color	orange
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15


ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

Desene

Circuit diagram

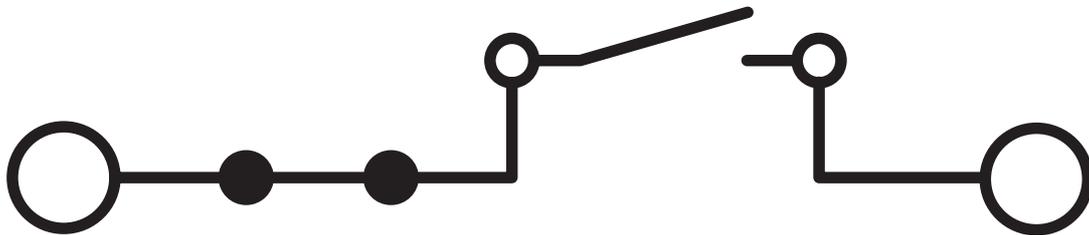

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

Aprobări

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/produse/3035014>

 CSA ID de înregistrare: 13631				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
Use group B	300 V	16 A	28 - 12	-
Use group C	150 V	16 A	28 - 12	-
Use group D	300 V	10 A	28 - 12	-

 EAC ID de înregistrare: RU C-DE.BL08.B.00644	
---	--

 cULus Recognized ID de înregistrare: E60425	
---	--

 cULus Recognized ID de înregistrare: E60425	
---	--

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

Clasificări

ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126
ECLASS-13.0	27250108

ETIM

ETIM 9.0	EC000902
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

Environmental product compliance

EU RoHS

Îndeplinește cerințele conform directivei RoHS	Da, Nicio reglementare privind excepțiile
--	---

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	Nu există substanțe periculoase peste valorile limită

EU REACH SVHC

Trimitere la substanța candidată REACH (nr. CAS)	Nicio substanță cu un procentaj masic mai mare de 0,1 %
--	---

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

Accesorii

i Indicație: Funcționarea produsului poate fi restricționată în cazul utilizării împreună cu unul din accesoriile prezentate mai jos.

FBS 2-5 - Plug-in bridge

3030161

<https://www.phoenixcontact.com/ro/produse/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red

i Max. current carrying capacity: 24 A

FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/ro/produse/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red

i Max. current carrying capacity: 24 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBS 4-5 - Plug-in bridge

3030187

<https://www.phoenixcontact.com/ro/produse/3030187>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

FBS 5-5 - Plug-in bridge

3030190

<https://www.phoenixcontact.com/ro/produse/3030190>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBS 10-5 - Plug-in bridge

3030213

<https://www.phoenixcontact.com/ro/produse/3030213>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

FBS 20-5 - Plug-in bridge

3030226

<https://www.phoenixcontact.com/ro/produse/3030226>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 24 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBS 50-5 - Plug-in bridge

3038930

<https://www.phoenixcontact.com/ro/produse/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 24 A

FBSR 2-5 - Plug-in bridge

3033702

<https://www.phoenixcontact.com/ro/produse/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 17.5 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBSR 3-5 - Plug-in bridge

3001591

<https://www.phoenixcontact.com/ro/produse/3001591>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 17.5 A

FBSR 4-5 - Plug-in bridge

3001592

<https://www.phoenixcontact.com/ro/produse/3001592>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBSR 5-5 - Plug-in bridge

3001593

<https://www.phoenixcontact.com/ro/produse/3001593>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red



 Max. current carrying capacity: 17.5 A

FBSR 10-5 - Plug-in bridge

3033710

<https://www.phoenixcontact.com/ro/produse/3033710>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red



 Max. current carrying capacity: 17.5 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBS 2-5 BU - Plug-in bridge

3036877

<https://www.phoenixcontact.com/ro/produse/3036877>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 24 A

FBS 3-5 BU - Plug-in bridge

3036880

<https://www.phoenixcontact.com/ro/produse/3036880>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 24 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>



FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/ro/produse/3036893>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 24 A

FBS 5-5 BU - Plug-in bridge

3036903

<https://www.phoenixcontact.com/ro/produse/3036903>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 24 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBS 10-5 BU - Plug-in bridge

3036916

<https://www.phoenixcontact.com/ro/produse/3036916>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 24 A

FBS 20-5 BU - Plug-in bridge

3036929

<https://www.phoenixcontact.com/ro/produse/3036929>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 24 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

FBS 50-5 BU - Plug-in bridge

3032114

<https://www.phoenixcontact.com/ro/produse/3032114>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 24 A

RB ST (2,5/4)-1,5/S - Reducing bridge

3214356

<https://www.phoenixcontact.com/ro/produse/3214356>



Reducing bridge, pitch: 6.7 mm, number of positions: 2, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

RB ST 6-(2,5/4) - Reducing bridge

3030860

<https://www.phoenixcontact.com/ro/produse/3030860>



Reducing bridge, pitch: 9 mm, number of positions: 2, length: 30 mm, color: red

 Max. current carrying capacity: 35 A

RB ST 10-(2,5/4) - Reducing bridge

3030873

<https://www.phoenixcontact.com/ro/produse/3030873>



Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red

 Max. current carrying capacity: 35 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

RB ST 16-(2,5/4) - Reducing bridge

3030886

<https://www.phoenixcontact.com/ro/produse/3030886>



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 37 mm, color: red

 Max. current carrying capacity: 35 A

RB ST 35-(2,5/4) - Reducing bridge

3030899

<https://www.phoenixcontact.com/ro/produse/3030899>



Reducing bridge, pitch: 11 mm, number of positions: 2, color: red

 Max. current carrying capacity: 35 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

RB ST (2,5/4)-1,5 - Reducing bridge

3038943

<https://www.phoenixcontact.com/ro/produse/3038943>



Reducing bridge, pitch: 7.1 mm, number of positions: 2, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

RB UT 6-ST(2,5/4) - Reducing bridge

3047264

<https://www.phoenixcontact.com/ro/produse/3047264>



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 33 mm, color: red

 Max. current carrying capacity: 35 A

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>



RB UT 35-ST(2,5/4) - Reducing bridge

3047280

<https://www.phoenixcontact.com/ro/produse/3047280>



Reducing bridge, pitch: 10.8 mm, number of positions: 2, color: red

 Max. current carrying capacity: 40 A

RB UT 10-ST(2,5/4) - Reducing bridge

3047086

<https://www.phoenixcontact.com/ro/produse/3047086>



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 33 mm, color: red

 Max. current carrying capacity: 40 A

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

RB UT 16-ST(2,5/4) - Reducing bridge

3047099

<https://www.phoenixcontact.com/ro/produse/3047099>



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 41 mm, color: red

 Max. current carrying capacity: 40 A

D-ST 2,5-TWIN - End cover

3030488

<https://www.phoenixcontact.com/ro/produse/3030488>

End cover, depth: 29 mm, width: 2.2 mm, height: 60.5 mm, color: gray



ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

ATP-ST-TWIN - Partition plate

3030789

<https://www.phoenixcontact.com/ro/produse/3030789>

Partition plate, depth: 39 mm, width: 2 mm, height: 75.2 mm, color: gray



WST 2,5 - Warning cover

3030941

<https://www.phoenixcontact.com/ro/produse/3030941>

Warning cover, 5-pos., for terminal width: 5.2 mm



ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>



D-ST 2,5-TWIN-0,8 OG - End cover

3030512

<https://www.phoenixcontact.com/ro/produce/3030512>

End cover, depth: 29 mm, width: 0.8 mm, height: 60.5 mm, color: orange



S-MT - Switching lock

3247954

<https://www.phoenixcontact.com/ro/produce/3247954>

Switching lock, depth: 23.1 mm, width: 3.5 mm, height: 10.5 mm, color: white



ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

CEC 2,5 - Filler plug

3062757

<https://www.phoenixcontact.com/ro/produce/3062757>



Cover for conductor shaft, 10-pos., for spring cage terminal blocks (ST) and terminal blocks with push-in technology (PT) with a width of 5.2 mm

P-CO 2-5 R47K - Component connector

3032447

<https://www.phoenixcontact.com/ro/produce/3032447>



Component connector, with 47 kOhm resistance for wire-break monitoring, pitch: 5.2 mm, depth: 34.8 mm, width: 4.1 mm, height: 8.9 mm, number of positions: 2, color: black

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

LPO 2,5/E - Pick-off plug

3270516

<https://www.phoenixcontact.com/ro/produce/3270516>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

LPO 2,5 - Pick-off plug

3270517

<https://www.phoenixcontact.com/ro/produce/3270517>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

LPS-5/E - Service connector

3270520

<https://www.phoenixcontact.com/ro/produse/3270520>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

LPS-5 - Service connector

3270521

<https://www.phoenixcontact.com/ro/produse/3270521>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/ro/produce/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/ro/produce/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/ro/produce/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/ro/produce/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/ro/produce/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/ro/produce/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/ro/produce/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/ro/produce/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/ro/produse/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/ro/produse/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>



ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/ro/produse/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/ro/produse/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/ro/produce/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/ro/produce/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/ro/produce/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/ro/produce/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>



UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/ro/produce/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/ro/produce/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/ro/produce/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/ro/produce/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

<https://www.phoenixcontact.com/ro/produce/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

ZBF 5 CUS - Zack Marker strip, flat

0825025

<https://www.phoenixcontact.com/ro/produce/0825025>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

<https://www.phoenixcontact.com/ro/produse/0808671>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

<https://www.phoenixcontact.com/ro/produse/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

<https://www.phoenixcontact.com/ro/produce/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

<https://www.phoenixcontact.com/ro/produce/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

UC-TMF 5 - Marker for terminal blocks

0818153

<https://www.phoenixcontact.com/ro/produce/0818153>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

UC-TMF 5 CUS - Marker for terminal blocks

0824638

<https://www.phoenixcontact.com/ro/produce/0824638>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

UCT-TMF 5 - Marker for terminal blocks

0828744

<https://www.phoenixcontact.com/ro/produce/0828744>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

UCT-TMF 5 CUS - Marker for terminal blocks

0829658

<https://www.phoenixcontact.com/ro/produce/0829658>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

ISH 2,5/0,2 - Insulating sleeve

3002843

<https://www.phoenixcontact.com/ro/produce/3002843>



Insulating sleeve, color: white

ISH 2,5/0,5 - Insulating sleeve

3002856

<https://www.phoenixcontact.com/ro/produce/3002856>



Insulating sleeve, color: gray

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

ISH 2,5/1,0 - Insulating sleeve

3002869

<https://www.phoenixcontact.com/ro/produse/3002869>



Insulating sleeve, color: black

PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/ro/produse/3035975>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/ro/produse/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/ro/produse/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/ro/produse/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/ro/produse/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/ro/produse/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/ro/produse/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/ro/produse/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/ro/produse/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

ST 2,5-MT OG - Knife-disconnect terminal block



3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/ro/produse/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PS-5 - Test plug

3030983

<https://www.phoenixcontact.com/ro/produse/3030983>



Test plug, Modular test plug, number of positions: 1, color: red

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>

DP PS-5 - Spacer plate

3036725

<https://www.phoenixcontact.com/ro/produse/3036725>



Spacer plate, depth: 29 mm, width: 5.2 mm, height: 22.4 mm, number of positions: 1, color: red

PS-5/2,3MM RD - Test plug

3038723

<https://www.phoenixcontact.com/ro/produse/3038723>



Test plug, number of positions: 1, color: red

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produce/3035014>

E/AL-NS 35 - End bracket

1201662

<https://www.phoenixcontact.com/ro/produce/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/ro/produce/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

ST 2,5-MT OG - Knife-disconnect terminal block

3035014

<https://www.phoenixcontact.com/ro/produse/3035014>



ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/ro/produse/1207608>

Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages



Phoenix Contact 2024 © - Toate drepturile rezervate

<https://www.phoenixcontact.com>

PHOENIX CONTACT România

Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1

Bucuresti 030133

+40 21 350 88 12 - 3

sales.ro@phoenixcontact.com