



expansion module I(N),I(diff),analog N-conductor measurement, residual current measurement, 2 analog inputs, plug-in, for 7KM PAC3220 / 4220

Model	
product brand name	SETRON
product designation	I(N),I(Diff) expansion module, analog N conductor measurement, differential current measurement, 2 analog inputs
type of voltage supply	via PAC 3200 / PAC4200
General technical data	
galvanic isolation	Maximum insulation voltage: 500V AC
degree of pollution	2 according to IEC 61131
supply voltage 1 at DC	
• minimum rated value	28.8 V
• maximum rated value	19.2 V
Protection class	
protection class IP	IP20
combustibility class according to UL 94	V 0
suitability for use	7KM PAC 3220 / PAC 4200 / PAC 4220
suitability for use reactive power meter	No
Connections	
type of electrical connection	screw terminal
Mechanical Design	
height	90 mm
width	18 mm
depth	73 mm
fastening method	pluggable
Net Weight	81 g
Environmental conditions	
ambient temperature during operation	
• minimum	-10 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-25 °C
• maximum	70 °C
Approvals Certificates	
Environmental Product Declaration	
• global warming potential [CO2 eq] / during manufacturing	3.16 kg
• global warming potential [CO2 eq] / during sales	0.0197 kg
• global warming potential [CO2 eq] / during operation	0 kg

- global warming potential [CO2 eq] / after end of life
- global warming potential [CO2 eq] / total

-0.359 kg

2.82 kg

Environment

General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



Siemens
EcoTech



General Product Ap- proval

EMV

other



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KM9200-0AD00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KM9200-0AD00-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9200-0AD00-0AA0

CAX-Online-Generator



<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>

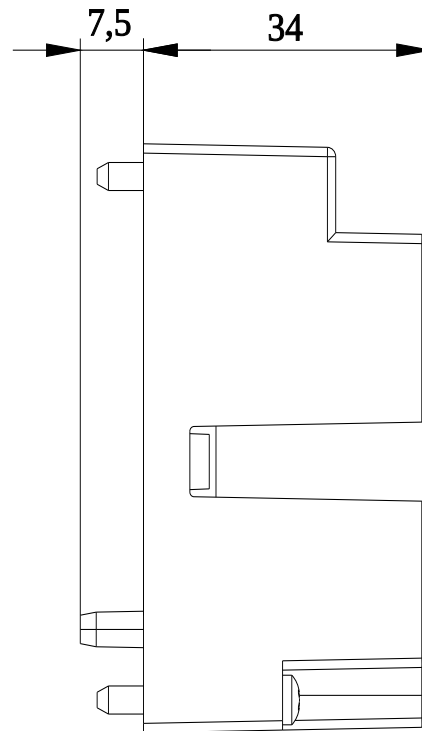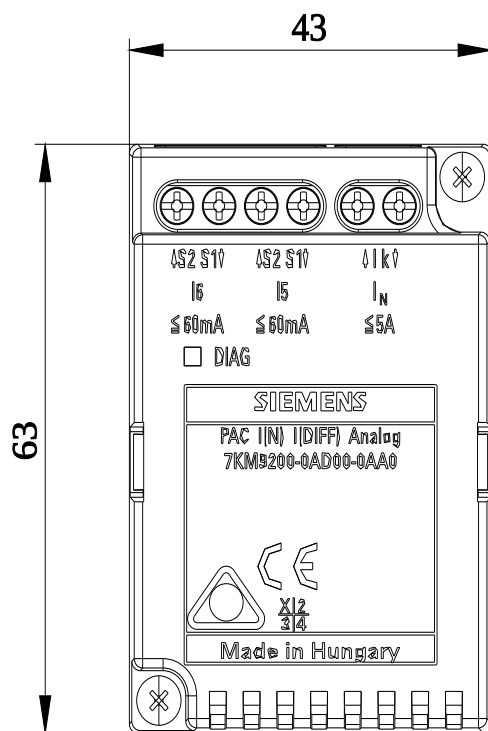

-P

SIEMENS

I5	I5	I6	I6	In	In	
S1	S2	S1	S2	k	l	

