

HC-STA-B16-BWSC-ELC-AL - Housing



1411325

<https://www.phoenixcontact.com/ro/produse/1411325>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Panel mounting base B16, with single locking latch, material: Die-cast aluminum, salt water resistant, protective cover material: PC, height: 30.5 mm, cable gland: none, protective cover: yes, Standard, with flat gasket

Avantajele dumneavoastră

- Good shielding in the event of electromagnetic interference

Date comerciale

Număr articol	1411325
Unitate de ambalare	1 Bucată
Cantitate minimă pentru comandă	1 Bucată
Cod produs	BF7APB
Pagina de catalog	Pagina 619 (C-2-2019)
GTIN	4046356927260
Greutate pe bucată (inclusiv ambalajul)	152,5 g
Greutate pe bucată (fără ambalaj)	130,32 g
Cod tarifar vamal	85389099
Țara de origine	CN

HC-STA-B16-BWSC-ELC-AL - Housing



1411325

<https://www.phoenixcontact.com/ro/produse/1411325>

Date tehnice

Notes

General	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
General	also available as a powder-coated or color version: 1373277 HC-STA-B16-BWSC-EL/.../...


Product properties

Product type	Housing with locking latch
Housing type	Panel mounting base
Application	Standard
Type	B16
Protective cover	yes
Pg screw connection	none

Data management status

Article revision	03
------------------	----

Dimensions

Dimensional drawing	
Width	53 mm
Height	30.5 mm
Length	114 mm
Drill hole distance, horizontal	103 mm
Drill hole distance, vertical	32 mm
Hole diameter	4.5 mm

Installation dimensions

Width of the assembly cutout	35 mm
Length of the assembly cutout	86 mm

Material specifications

Flammability rating according to UL 94	V0 (Interlock)
	V0 (Protective cover)
Seal material	NBR, conductive
	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Material, protective cover	PC
Locking latch material	Polyamide

Mechanical properties

HC-STA-B16-BWSC-ELC-AL - Housing



1411325

<https://www.phoenixcontact.com/ro/produse/1411325>

Mechanical data

Locking type	Latch
--------------	-------

Connection data

Tightening torque	0.8 Nm ... 1.2 Nm (For M4 mounting screws on the panel-mount base)
-------------------	--


Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66 (with locked protective cover)
	IP67 (when plugged in)
Impact strength	IK08
Ambient temperature (operation)	-40 °C ... 125 °C


Desene

Dimensional drawing

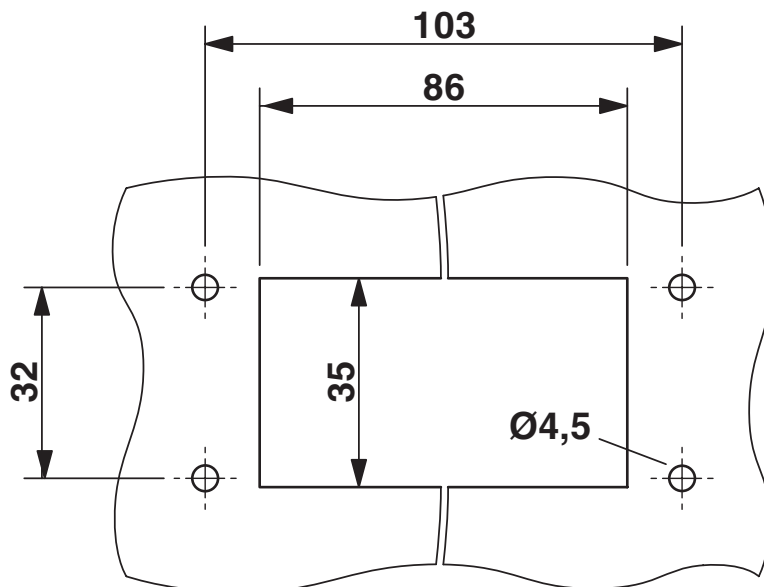

Mounting cutout

Dimensional drawing

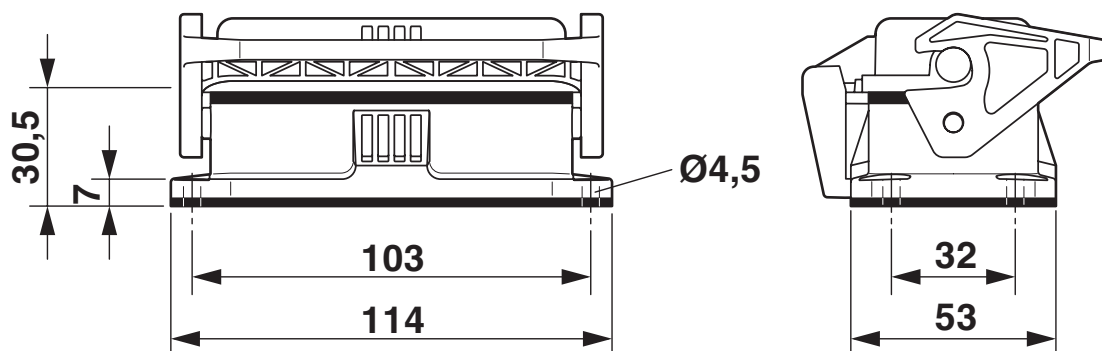

Dimensional drawing

1411325

<https://www.phoenixcontact.com/ro/produse/1411325>

Aprobări

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/produse/1411325>

DNV

ID de înregistrare: TAE000037S



EAC

ID de înregistrare: RU C-DE.AI30.B.01102



EAC

ID de înregistrare: RU C-DE.BL08.B.00511



cUL Recognized

ID de înregistrare: E255026



UL Recognized

ID de înregistrare: E255026

cULus Recognized

1411325

<https://www.phoenixcontact.com/ro/produse/1411325>

Clasificări

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS

Îndeplinește cerințele conform directivei RoHS	Da, Nicio reglementare privind excepțiile
--	---

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	Nu există substanțe periculoase peste valorile limită

EU REACH SVHC

Trimitere la substanța candidată REACH (nr. CAS)	Nicio substanță cu un procentaj masic mai mare de 0,1 %
--	---

HC-STA-B16-BWSC-ELC-AL - Housing



1411325

<https://www.phoenixcontact.com/ro/produse/1411325>

Accesorii

HC-B16-SG-CBK - Flat gasket

1411485

<https://www.phoenixcontact.com/ro/produse/1411485>

Replacement flat gasket, for HEAVYCON panel mounting base, HC-STA....AL, type B16, conductive



HC-B16-SP-CBK - Profile gasket

1411480

<https://www.phoenixcontact.com/ro/produse/1411480>

Profile gasket for HEAVYCON EVO supporting base element type B16, conductive



HC-STA-B16-BWSC-ELC-AL - Housing

1411325

<https://www.phoenixcontact.com/ro/produse/1411325>



HC-STA-B16-SL-PLBK - Housing brackets

1412284

<https://www.phoenixcontact.com/ro/produse/1412284>



Single locking latch for B16 housing, HC-EVO....AL and HC-STA....AL

HC-B16-BC-HI-PLBK - Protective cover

1407694

<https://www.phoenixcontact.com/ro/produse/1407694>



Protective cover B16, for single locking latch, protective cover material: PC, height: 19 mm, seal: no

HC-STA-B16-BWSC-ELC-AL - Housing



1411325

<https://www.phoenixcontact.com/ro/produse/1411325>

US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/ro/produse/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

US-EMLP-HA (20X9) CUS - Plastic label

0830995

<https://www.phoenixcontact.com/ro/produse/0830995>



Plastic label, Card, can be ordered: by card, white, labeled, can be labeled with: THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

HC-STA-B16-BWSC-ELC-AL - Housing

1411325

<https://www.phoenixcontact.com/ro/produse/1411325>



HC-STA-B16-DC-PL - Protective cover

1421102

<https://www.phoenixcontact.com/ro/produse/1421102>

Protective cover, design: B16



Phoenix Contact 2024 © - Toate drepturile rezervate

<https://www.phoenixcontact.com>

PHOENIX CONTACT România

Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1

Bucuresti 030133

+40 21 350 88 12 - 3

sales.ro@phoenixcontact.com