

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 400 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.2 mm²- 4 mm², connection method: Screw connection, cross section: 0.2 mm²- 4 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: black

Avantajele dumneavoastră

- Compact double-level fuse terminal block

Date comerciale

Număr articol	3007204
Unitate de ambalare	50 Bucată
Cantitate minimă pentru comandă	1 Bucată
Cod produs	BE1234
Pagina de catalog	Pagina 494 (C-1-2019)
GTIN	4017918155988
Greutate pe bucată (inclusiv ambalajul)	35,148 g
Greutate pe bucată (fără ambalaj)	35,072 g
Cod tarifar vamal	85369095
Țara de origine	PL

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

Date tehnice

Notes

Note regarding marking	For terminal marking, please use marking material with 8.2 mm pitch.
Note regarding marking	For lever marking, please use flat marking material with 8.2 mm pitch.

Product properties

Product type	Fuse terminal block
Number of positions	1
Number of connections	4
Number of rows	2

Data management status

Article revision	08
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W
Fuse	G / 5 x 20

Connection data

Number of connections per level	2
Nominal cross section	4 mm ²

Level 1 above 1 below 1

Screw thread	M3
Tightening torque	0.5 ... 0.8 Nm
Stripping length	8 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 4 mm ²
Cross-section with insertion bridge, rigid	4 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal current	32 A
Maximum load current	32 A (Lower level)
Nominal voltage	400 V
Nominal cross section	4 mm ²

Level 1 above 1 below 1

Screw thread	M3
Tightening torque	0.5 ... 0.8 Nm
Stripping length	8 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 4 mm ²
Cross-section with insertion bridge, rigid	4 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal current	6.3 A
Maximum load current	6.3 A
Nominal voltage	400 V

Dimensions

Width	8.2 mm
Height	86.5 mm
Depth on NS 32	84 mm
Depth on NS 35/7,5	79 mm
Depth on NS 35/15	86.5 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-1
	IEC 60947-7-3

Mounting


Mounting type	NS 35/7,5
	NS 35/15
	NS 32

Desene

Circuit diagram

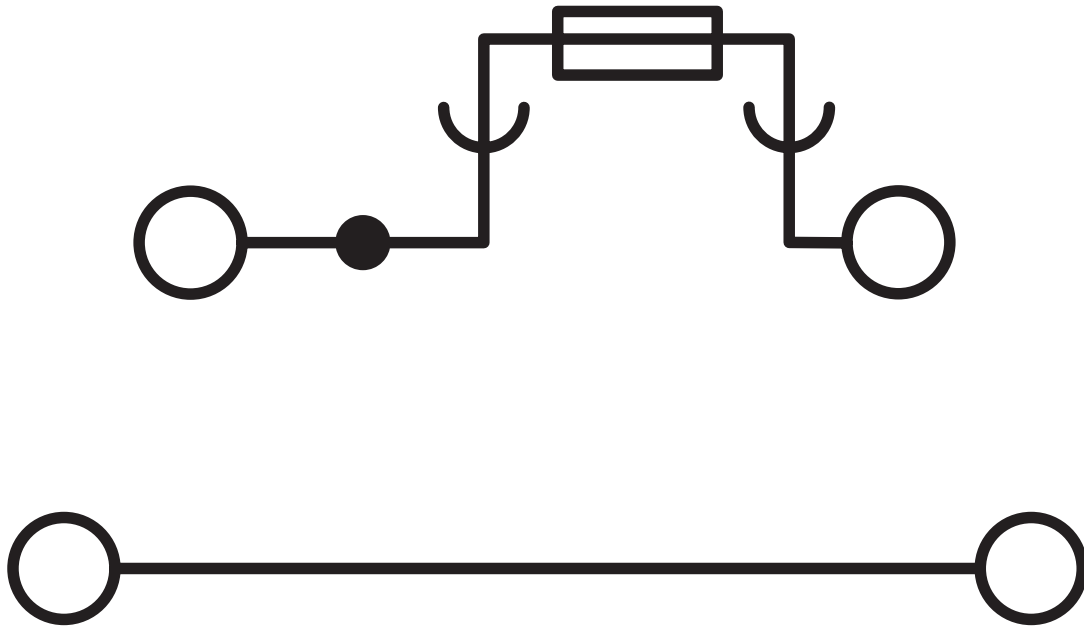

Circuit diagram

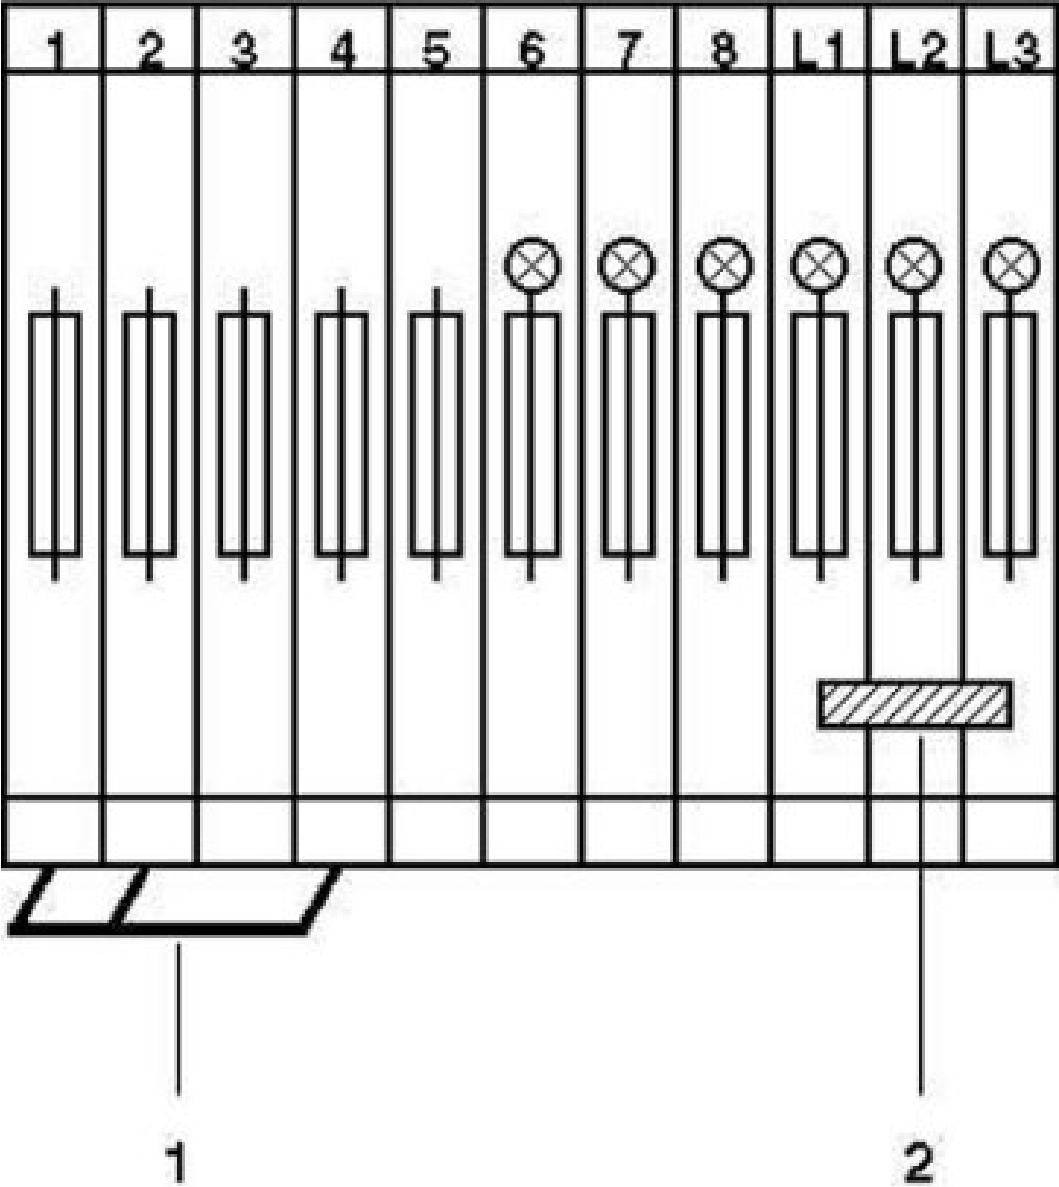

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

Aprobări

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/produse/3007204>

 CSA ID de înregistrare: 13631				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
Use group B				
	300 V	15 A	28 - 10	-
Use group C				
	300 V	15 A	28 - 10	-

 EAC ID de înregistrare: RU C-DE.BL08.B.00534				
--	--	--	--	--

 cULus Recognized ID de înregistrare: E60425				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
Use group B				
upper level	300 V	15 A	26 - 10	-
lower level	300 V	30 A	26 - 10	-
Use group C				
upper level	300 V	15 A	26 - 10	-
lower level	300 V	30 A	26 - 10	-
Use group D				
upper level	600 V	5 A	26 - 10	-
lower level	600 V	5 A	26 - 10	-

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

Clasificări

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS

Îndeplinește cerințele conform directivei RoHS	Da
reglementări excepționale, dacă sunt cunoscute	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	Un tabel de declarații China RoHS legat de articol poate fi găsit în zona de descărcare a articolului respectiv la „Declarația producătorului”. Nu se emite și nu este necesar niciun tabel de declarații China RoHS pentru toate articolele EFUP-E.

EU REACH SVHC

Trimitere la substanța candidată REACH (nr. CAS)	Lead(nr. CAS: 7439-92-1)
SCIP	b923fe14-20c0-4317-a491-e4777aa0f1b7

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

Accesorii



Indicație: Funcționarea produsului poate fi restricționată în cazul utilizării împreună cu unul din accesorii prezentate mai jos.

FBRI 10-8 N - Fixed bridge

2772080

<https://www.phoenixcontact.com/ro/produse/2772080>



Fixed bridge, pitch: 8.2 mm, number of positions: 10, color: silver



Max. current carrying capacity: 32 A

EBS 2- 8 - Insertion bridge

3118151

<https://www.phoenixcontact.com/ro/produse/3118151>



Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray



Max. current carrying capacity: 32 A

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

EBS 3- 8 - Insertion bridge

3118148

<https://www.phoenixcontact.com/ro/produse/3118148>

Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray



 Max. current carrying capacity: 32 A

EBS 10- 8 - Insertion bridge

3118135

<https://www.phoenixcontact.com/ro/produse/3118135>

Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 32 A

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/ro/produse/1007235>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm

RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/ro/produse/0201647>



Reducing plug, number of positions: 1, color: gray

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/ro/produse/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/ro/produse/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/ro/produse/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/ro/produse/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/ro/produse/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/ro/produse/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/ro/produse/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/ro/produse/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/ro/produse/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/ro/produse/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/ro/produse/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/ro/produse/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/ro/produse/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/ro/produse/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/ro/produse/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/ro/produse/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/ro/produse/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/ro/produse/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/ro/produse/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/ro/produse/1206573>

DIN rail end piece, for DIN rail NS 35/15



UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/ro/produse/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/ro/produse/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UKK 5-HESI (5X20) - Fuse modular terminal block




3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/ro/produse/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/ro/produse/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/ro/produse/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/ro/produse/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/ro/produse/0829616>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/ro/produse/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/ro/produse/1052028>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/ro/produse/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat

0808781

<https://www.phoenixcontact.com/ro/produse/0808781>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

ZBF 8 CUS - Zack Marker strip, flat

0825030

<https://www.phoenixcontact.com/ro/produse/0825030>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

ZBF 8,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808804

<https://www.phoenixcontact.com/ro/produse/0808804>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

UC-TMF 8 - Marker for terminal blocks

0818137

<https://www.phoenixcontact.com/ro/produse/0818137>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



UC-TMF 8 CUS - Marker for terminal blocks

0824654

<https://www.phoenixcontact.com/ro/produse/0824654>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

UCT-TMF 8 - Marker for terminal blocks

0828748

<https://www.phoenixcontact.com/ro/produse/0828748>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

UKK 5-HESI (5X20) - Fuse modular terminal block

3007204

<https://www.phoenixcontact.com/ro/produse/3007204>



UCT-TMF 8 CUS - Marker for terminal blocks

0829672

<https://www.phoenixcontact.com/ro/produse/0829672>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/ro/produse/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/ro/produse/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/ro/produse/0800886>



End clamp, width: 9.5 mm, color: gray

UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

E/UK - End bracket

1201442

<https://www.phoenixcontact.com/ro/produse/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/ro/produse/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



UKK 5-HESI (5X20) - Fuse modular terminal block



3007204

<https://www.phoenixcontact.com/ro/produse/3007204>

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/ro/produse/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - Toate drepturile rezervate
<https://www.phoenixcontact.com>

PHOENIX CONTACT România
Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1
Bucuresti 030133
+40 21 350 88 12 - 3
sales.ro@phoenixcontact.com