

CGSA 50 - Cable guiding system



3071401

<https://www.phoenixcontact.com/ro/produse/3071401>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.

Cable guiding system, with swivel joint for opening, depth: 140.5 mm, width: 68 mm, height: 218 mm, diameter: 42 mm, color: gray



Avantajele dumneavoastră

- Subsequent wiring is easy, thanks to swivel joint openings that can be operated without tools
- Easily plan cable harnesses: the cable length is predefined through the swivel arm
- Integrated flanges with strain relief make assembly quick and easy
- Mechanical cable protection and bundling, thanks to protective covers that can be attached without tools
- Route preassembled cables and wires easily, thanks to the patent-pending swivel joint
- High-grade elastic and mechanically resilient plastic, certified according to UL 94 for flammability rating: V0
- Cable routing for the control cabinet door can be planned in the CAD system, thanks to the defined installation space and swivel range

Date comerciale

Număr articol	3071401
Unitate de ambalare	1 Bucată
Cantitate minimă pentru comandă	1 Bucată
Cod produs	BE61ZX
Pagina de catalog	Pagina 655 (C-1-2019)
GTIN	4055626289175
Greutate pe bucată (inclusiv ambalajul)	434,7 g
Greutate pe bucată (fără ambalaj)	429,7 g
Cod tarifar vamal	39259020
Țara de origine	PL

CGSA 50 - Cable guiding system

3071401

<https://www.phoenixcontact.com/ro/produse/3071401>



Date tehnice

Notes

General	Cable binders can be used up to a width of 4 mm and from a length of 40 mm
---------	--

Product properties

Product type	Cable feed-through
Number of cables	100 for 1.5 mm²

Dimensions

Dimensional drawing	
Width	68 mm
Height	218 mm
Depth	140.5 mm
Cable length	700 mm ... 460 mm
Drill hole distance, horizontal	25 mm
Drill hole distance, vertical	25 mm
Diameter	42 mm
Hole diameter	5.5 mm

Material specifications

Color	gray
Material	PC
Flammability rating according to UL 94	V0
Static insulating material application in cold	-40 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Components	halogen-free

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

CGSA 50 - Cable guiding system



3071401

<https://www.phoenixcontact.com/ro/produse/3071401>

Ambient temperature (operation)	-60 °C ... 85 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 55 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

CGSA 50 - Cable guiding system


3071401

<https://www.phoenixcontact.com/ro/produse/3071401>




Desene


Dimensional drawing

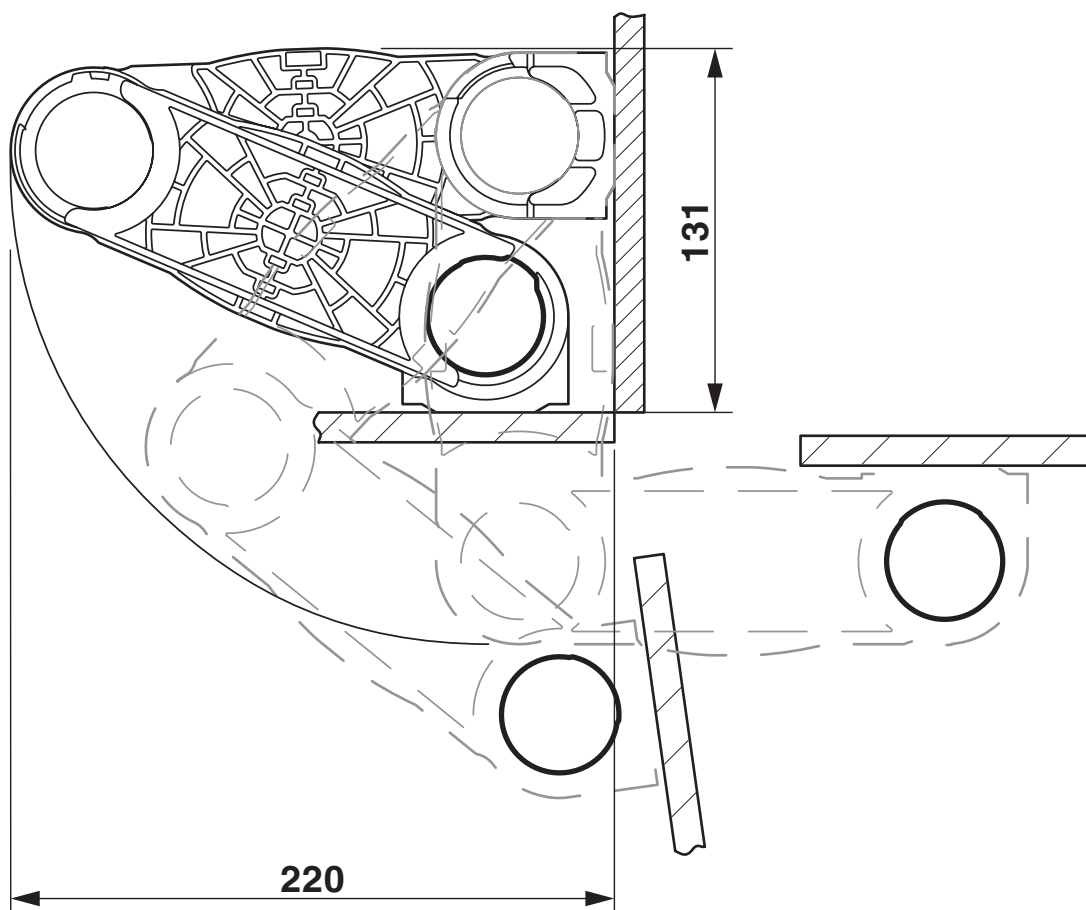

Dimensional drawing

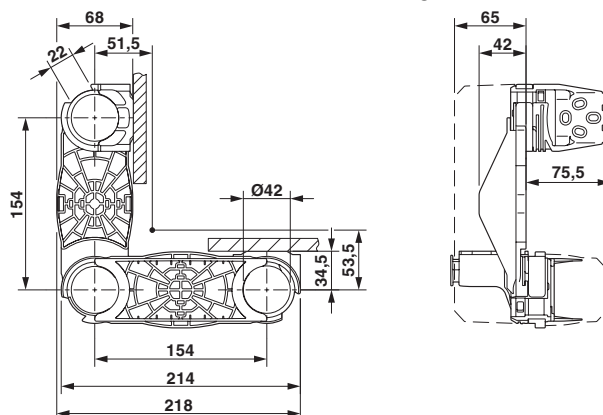

Dimensional drawing

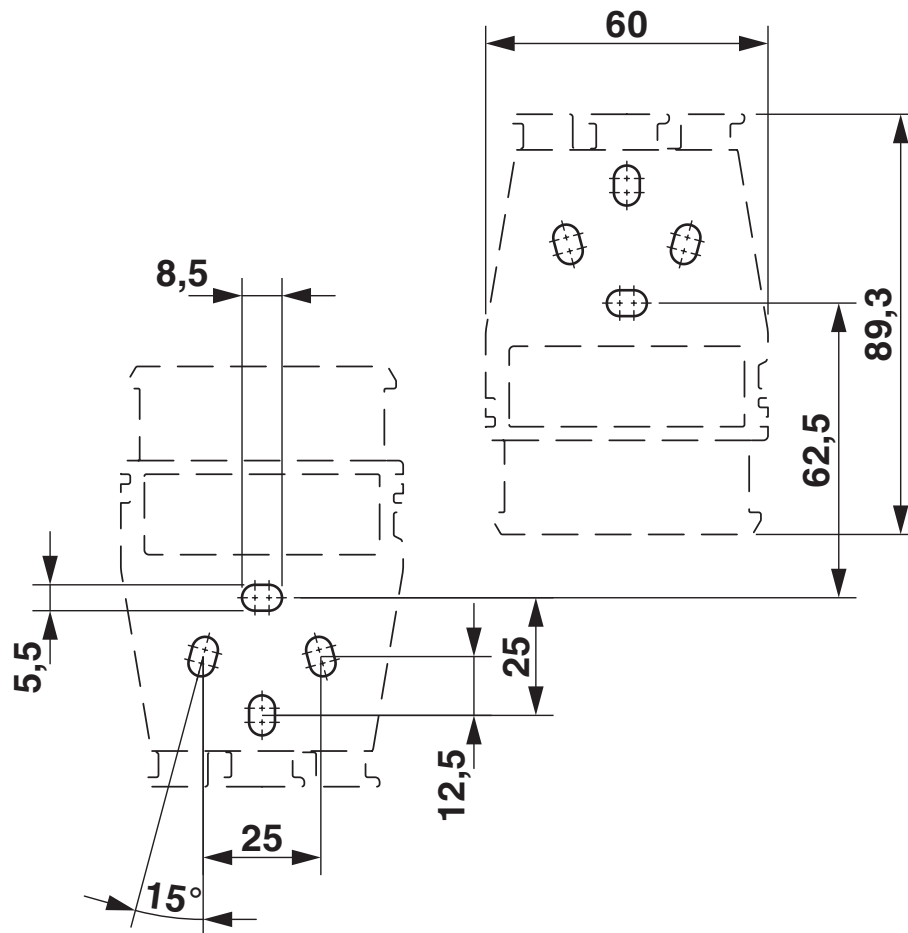


CGSA 50 - Cable guiding system

3071401

<https://www.phoenixcontact.com/ro/produse/3071401>



Dimensional drawing

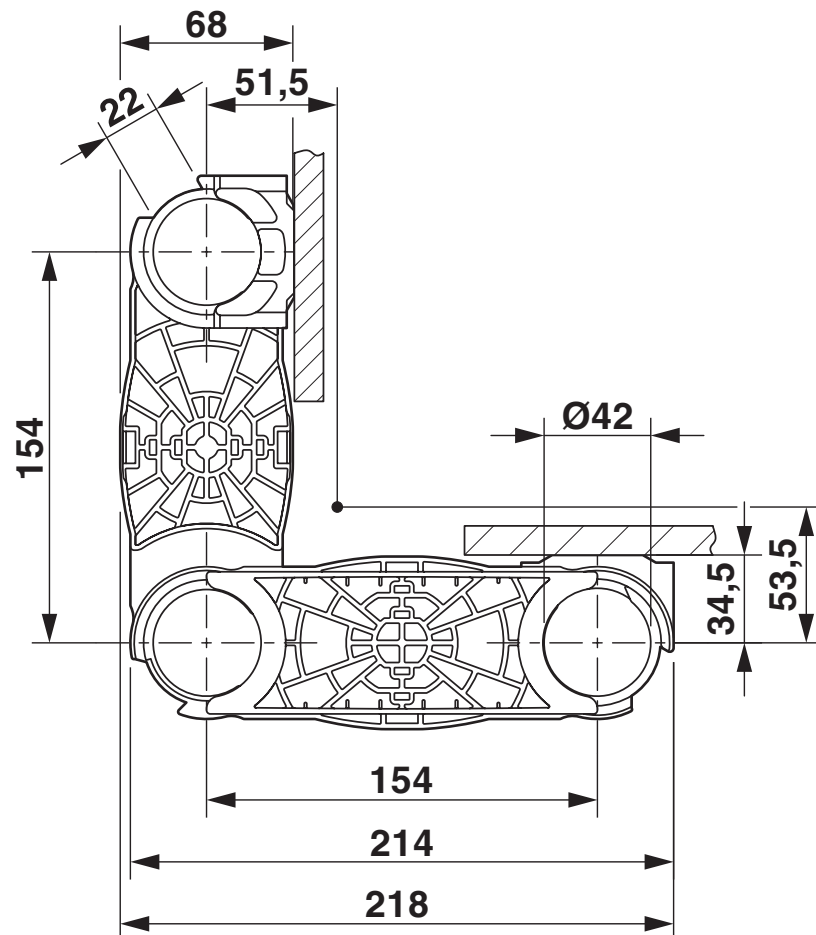

CGSA 50 - Cable guiding system

3071401

<https://www.phoenixcontact.com/ro/produse/3071401>



Aprobări

💡 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/produse/3071401>



VDE Zeichengenehmigung

ID de înregistrare: 40047466

CGSA 50 - Cable guiding system

3071401

<https://www.phoenixcontact.com/ro/produse/3071401>



Clasificări

ECLASS

ECLASS-11.0	27182811
ECLASS-12.0	27182811
ECLASS-13.0	27182811

ETIM

ETIM 9.0	EC002620
----------	----------

UNSPSC

UNSPSC 21.0	39121700
-------------	----------

Environmental product compliance

EU RoHS

Îndeplinește cerințele conform directivei RoHS	Da, Nicio reglementare privind excepțiile
--	---

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	Nu există substanțe periculoase peste valorile limită

EU REACH SVHC

Trimitere la substanța candidată REACH (nr. CAS)	Nicio substanță cu un procentaj masic mai mare de 0,1 %
--	---

CGSA 50 - Cable guiding system



3071401

<https://www.phoenixcontact.com/ro/produse/3071401>

Accesorii

CGS-AH 50 SET - Cover

3071410

<https://www.phoenixcontact.com/ro/produse/3071410>



Cover, packed in pairs, depth: 54.5 mm, width: 63 mm, height: 214 mm, color: gray

WT-HF 3,6X140 - Cable tie

3240744

<https://www.phoenixcontact.com/ro/produse/3240744>



Cable binders for quick and secure bundling, standard version

CGSA 50 - Cable guiding system



3071401

<https://www.phoenixcontact.com/ro/produse/3071401>

WT-HF 3,6X140 BK - Cable tie

3240745

<https://www.phoenixcontact.com/ro/produse/3240745>



Cable binders for quick and secure bundling, standard version

WT-HF 3,6X200 - Cable tie

3240748

<https://www.phoenixcontact.com/ro/produse/3240748>



Cable binders for quick and secure bundling, standard version

CGSA 50 - Cable guiding system



3071401

<https://www.phoenixcontact.com/ro/produse/3071401>

WT-HF 3,6X200 BK - Cable tie

3240749

<https://www.phoenixcontact.com/ro/produse/3240749>



Cable binders for quick and secure bundling, standard version

WT-HF 3,6X290 - Cable tie

3240752

<https://www.phoenixcontact.com/ro/produse/3240752>



Cable binders for quick and secure bundling, standard version

CGSA 50 - Cable guiding system

3071401

<https://www.phoenixcontact.com/ro/produse/3071401>



WT-HF 3,6X290 BK - Cable tie

3240753

<https://www.phoenixcontact.com/ro/produse/3240753>



Cable binders for quick and secure bundling, standard version

Phoenix Contact 2024 © - Toate drepturile rezervate

<https://www.phoenixcontact.com>

PHOENIX CONTACT România

Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1

Bucuresti 030133

+40 21 350 88 12 - 3

sales.ro@phoenixcontact.com