

Siemens
EcoTech



EMERGENCY-OFF mushroom pushbutton, 22 mm, round, plastic, red, 40 mm, with Siemens lock, B, lock number S1, positive latching, according to DIN EN ISO 13850, key-operated release

| | |
|--|-------------------------------------|
| product brand name | SIRIUS ACT |
| product designation | EMERGENCY STOP mushroom pushbuttons |
| design of the product | Actuating/signaling element |
| product type designation | 3SU1 |
| product line | Plastic, black, 22 mm |
| Enclosure | |
| number of command points | 1 |
| Actuator | |
| design of the actuating element | positive latching |
| principle of operation of the actuating element | latching |
| product extension optional | |
| • light source | No |
| • contact module | Yes |
| color | |
| • of the actuating element | red |
| material of the actuating element | plastic |
| shape of the actuating element | round |
| outer diameter of the actuating element | 40 mm |
| type of unlocking device | Unlocking |
| number of switching positions | 2 |
| switch position for key distraction | O |
| lock make | Siemens, B |
| key number | S1 |
| Front ring | |
| product component front ring | No |
| General technical data | |
| product function | |
| • positive opening | Yes |
| • EMERGENCY OFF function | Yes |
| • EMERGENCY STOP function | Yes |
| protection class IP | IP66, IP67, IP69(IP69K) |
| degree of protection NEMA rating | 1, 2, 3, 3R, 4, 4X, 12, 13 |
| shock resistance | |
| • according to IEC 60068-2-27 | sinusoidal half-wave 15 g / 11 ms |
| • for railway applications according to EN 61373 | Category 1, Class B |
| vibration resistance | |

| | |
|--|---|
| <ul style="list-style-type: none"> • according to IEC 60068-2-6 • for railway applications according to EN 61373 | 10 ... 500 Hz: 5 g Category 1, Class B |
| operating frequency maximum | 600 1/h |
| mechanical service life (operating cycles) typical | 300 000 |
| reference code according to IEC 81346-2 | S |
| Substance Prohibitance (Date) | 10/01/2014 |
| SVHC substance name | Lead CAS-No. 7439-92-1 |
| Net Weight | 104 g |

Safety related data

| | |
|--|----------------------|
| product function suitable for safety function | Yes |
| service life maximum | 20 a |
| test wear-related service life necessary | Yes |
| proportion of dangerous failures | |
| <ul style="list-style-type: none"> • with low demand rate according to SN 31920 • with high demand rate per NC contact according to SN 31920 • with high demand rate per NO contact according to SN 31920 | 20 % 20 % 50 % |
| B10 value with high demand rate according to SN 31920 | 100 000 |
| failure rate [FIT] with low demand rate per NC contact according to SN 31920 | 100 FIT |
| ISO 13849 | |
| device type according to ISO 13849-1 | 3 |
| IEC 61508 | |
| safety device type according to IEC 61508-2 | Type A |
| T1 value for proof test interval or service life according to IEC 61508 | 20 a |

Ambient conditions

| | |
|--|--|
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage | -25 ... +70 °C -40 ... +80 °C |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%) |

Installation/ mounting/ dimensions

| | |
|--|---------|
| shape of the installation opening | round |
| mounting diameter | 22.3 mm |
| positive tolerance of installation diameter | 0.4 mm |
| mounting height | 81.3 mm |
| installation width | 40 mm |
| installation depth | 26.3 mm |

Approvals Certificates

| | |
|--|--|
| Environmental Product Declaration | |
| <ul style="list-style-type: none"> • global warming potential [CO2 eq] / during manufacturing • global warming potential [CO2 eq] / during operation • global warming potential [CO2 eq] / after end of life • global warming potential [CO2 eq] / total | 0.566 kg 0.235 kg -0.0145 kg 0.787 kg |

Environment General Product Approval

[Environmental Confirmations](#)



Maritime application other



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1000-1HK20-0AA0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1000-1HK20-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1000-1HK20-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1000-1HK20-0AA0&lang=en

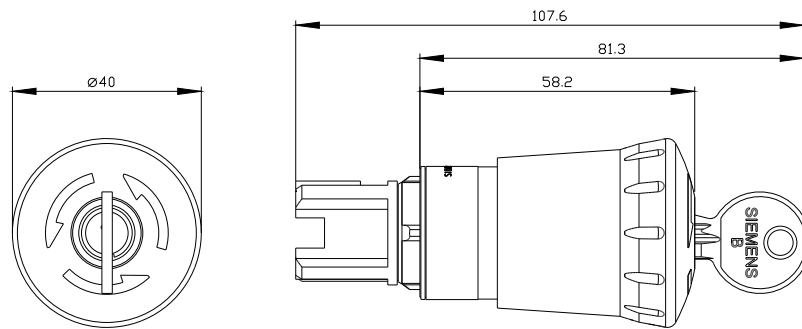

last modified:

4/4/2026 