



Figure similar

NEOZED fuse-link, D01, 4 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps

| Model                                                                               |                                  |
|-------------------------------------------------------------------------------------|----------------------------------|
| product brand name                                                                  | SETRON                           |
| product designation                                                                 | NEOZED fuse link                 |
| design of the product                                                               | With tin-coated contact caps     |
| product version                                                                     | Pack of 10                       |
| design of the fuse link                                                             | NEOZED fuse link                 |
| General technical data                                                              |                                  |
| size of fuse system according to EN 60269-1                                         | D01                              |
| operating class of the fuse link                                                    | gG                               |
| Supply voltage                                                                      |                                  |
| supply voltage                                                                      |                                  |
| • at AC                                                                             | 400 V                            |
| • at DC                                                                             | 250 V                            |
| operating voltage rated value                                                       | 400 V                            |
| protection class IP                                                                 | IP20, with connected conductors  |
| switching capacity current according to IEC 60947-2 rated value                     | 50 kA                            |
| Dissipation                                                                         |                                  |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 1.3 W                            |
| Main circuit                                                                        |                                  |
| operational current rated value                                                     | 4 A                              |
| Appearance                                                                          |                                  |
| color coding of the fuse link                                                       | Brown                            |
| maximum short-circuit current breaking capacity (Icu) at AC rated value             | 50 kA                            |
| Mechanical Design                                                                   |                                  |
| mounting position                                                                   | Any, preferably vertical         |
| Net Weight                                                                          | 6 g                              |
| ambient temperature during operation                                                |                                  |
| • minimum                                                                           | -25 °C                           |
| • maximum                                                                           | 40 °C                            |
| environmental category                                                              | Up to 45°C at 95 % rel. humidity |
| Approvals Certificates                                                              |                                  |
| Environment                                                                         | General Product Approval         |

General Product Approval

other



[Confirmation](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2304>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SE2304>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SE2304](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2304)

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

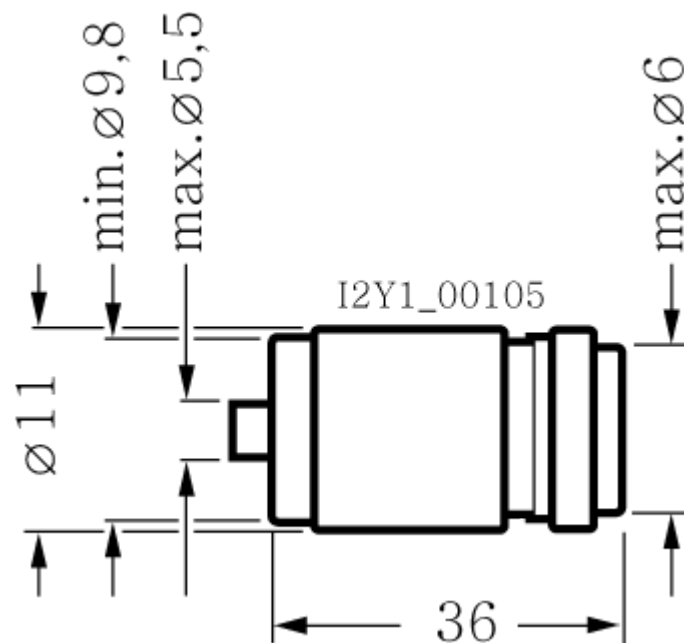

last modified:

4/10/2025

