

DELTA shutter controller FM isolating relay 2-fold with individual controller 230 V AC, 8A (AC 1)

Model	
product brand name	DELTA
product designation	Shutter/blind control
Supply voltage	
operating voltage rated value	230 V
supply voltage frequency	
• minimum	50 Hz
• maximum	50 Hz
Breaking Capacity	
switching capacity current	8 A
Main circuit	
operational current rated value	8 A
Relay contacts	
switching voltage of relay contacts rated value	250 V
Product details	
product component extension input	No
Number	
number of motors connectable	2
Connections	
type of electrical connection	Max. 2.5 mm ²
Mechanical Design	
width	59 mm
depth	22 mm
length	58 mm
fastening method	flush mounted
Net Weight	99 g
Environmental conditions	
ambient temperature during operation	
• minimum	0 °C
• maximum	60 °C
Approvals Certificates	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Miscellaneous](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TC1270>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TC1270>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TC1270

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

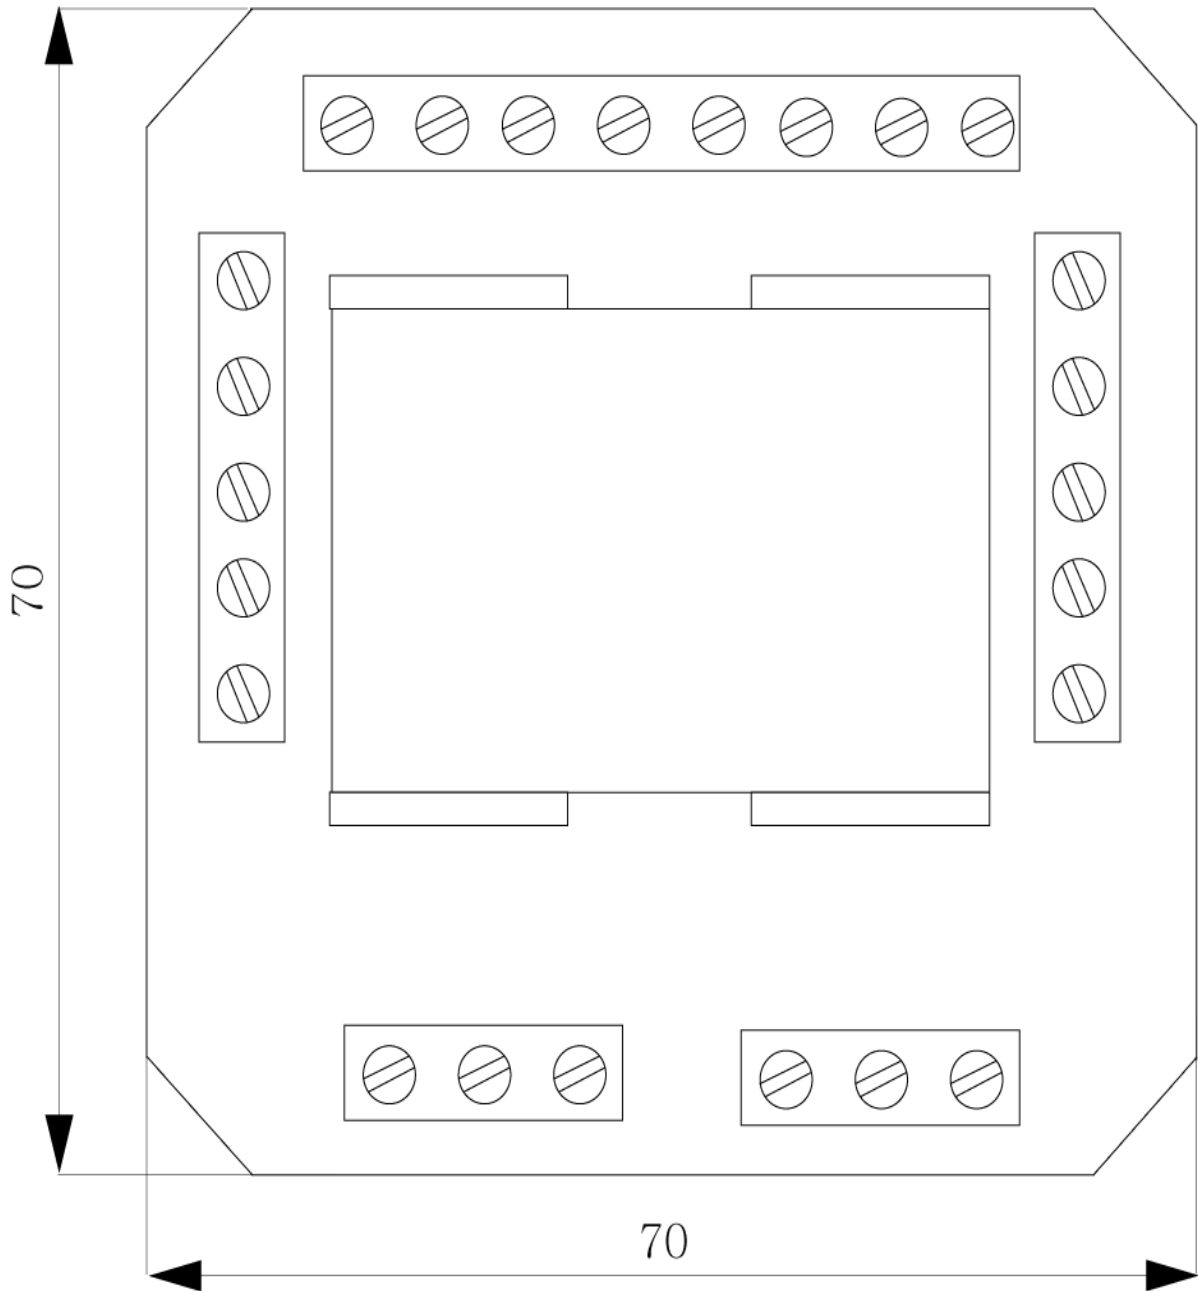

last modified:

4/4/2025

