

Fișă tehnică produs

Specificatii

Resi9 MP Kit incastrare in rigips



MIP99047

Principale

Gama	Resi9
Tip produs sau componenta	Kit de montaj
categoriile accesoriilor / piese de schimb	Accesorii pentru montaj
compatibilitate gama	Resi9 MP

Suplimentare

montare dulap	Suprafata Incastrat
suport de montare	Hollow partition

Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Număr de produse în pachet	1
Inaltime prima forma de impachetare	2,500 cm
Latime prima forma de impachetare	8,500 cm
Lungime prima forma de impachetare	17,000 cm
Greutate colet(Lbs)	58,000 g
Unitate de masura pentru a doua forma de impachetare	S03
Numar unitati in a doua forma de impachetare	50
Inaltime a doua forma de impachetare	30,000 cm
Latime a doua forma de impachetare	30,000 cm
Lungime a doua forma de impachetare	40,000 cm
Greutate a doua forma de impachetare	3,311 kg

Garanție contractuală

Garantie (in luni)	18
--------------------	----

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

Amprenta de mediu

Raport de mediu

[Profilul ambiental al produsului](#)

Use Better

Materiale si ambalare

Pachet cu carton reciclabil

Da

Ambalaj fara plastic

Nu

Numar SCIP

B7c6f1d6-d622-4f6c-907b-f4c3173076cb

Directiva RoHS a UE

[Conform Prin Scutire](#)

Regulamentul REACH

[Referinta contine SVHC peste prag](#)

Use Longer

Prelungire durata de viata

Reparare

Nu

Use Again

Reambalare si refabricare

Profil circularitate

Nu sunt necesare operatii de reciclare speciale

Preluare la sfarsitul duratei de viata

Da

Image of product / Alternate images

Alternative

Resi9 MP

Flush mounting enclosures

Base with pre-holes

- Clamping for hollow partition
- Carton protection for installation in

DIN rails

- 1 to 3 DIN rails fixed asymmetrically allow to have more space on entry cable side

Earth terminal block


- Clipped with screw or quick connection

Security combined with designed doors:
Reversible doors open to 140°, after which it can be removed, without breaking.

Smoked translucent White (paint) Smoked transparent.

Options


- Marker light: ensures that the electrical functions can be accessed in the event of a general power supply failure
- IP41
- Keylock

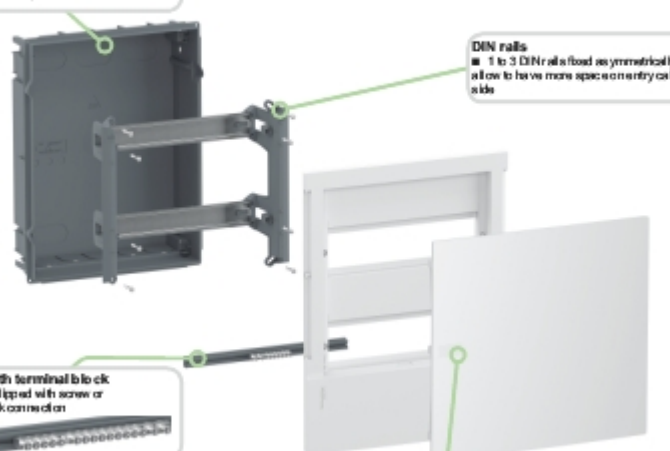

Resi9 MP - Dimensions

Flush mounting enclosures - from 4 to 36 modules

4, 6, 8, 12, 18 modules

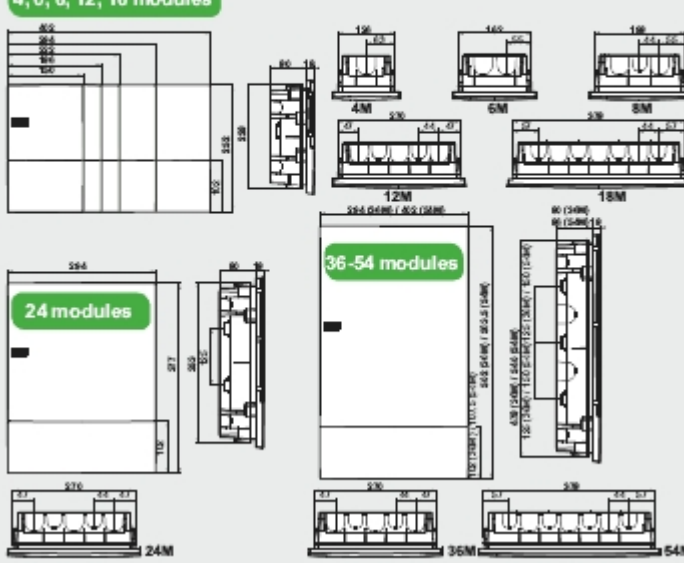

4 modules: 196 (width), 160 (height), 4M (depth)

6 modules: 296 (width), 160 (height), 6M (depth)

8 modules: 396 (width), 160 (height), 8M (depth)

12 modules: 596 (width), 160 (height), 12M (depth)

18 modules: 896 (width), 160 (height), 18M (depth)

24 modules: 1196 (width), 160 (height), 24M (depth)

36-54 modules: 1596 (width), 160 (height), 36M (depth) / 54M (depth)

Image of product in real life situation

