



SITOR cylindrical fuse link, 10 x 38 mm, 8 A, aR, Un AC: 600 V, Un DC: 700 V, DC according to UL

Figure similar

Model	
product brand name	SETRON
product designation	SITOR fuse link
design of the product	DC acc. to UL
General technical data	
operating class of the fuse link	aR
type of voltage of the operating voltage	AC
supply voltage at DC	700 V
Dissipation	
power loss [W]	2 W
power loss [W] for rated value of the current at AC in hot operating state per pole	2 W
Main circuit	
operational current rated value	8 A
Product details	
product component striker	No
Mechanical Design	
mounting position	Any, preferably vertical
Net Weight	9 g
Approvals Certificates	
Environment	General Product Approval

[Environmental Conformations](#)



[Environmental Conformations](#)



### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NC1008>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NC1008>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NC1008](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1008)

#### CAx-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

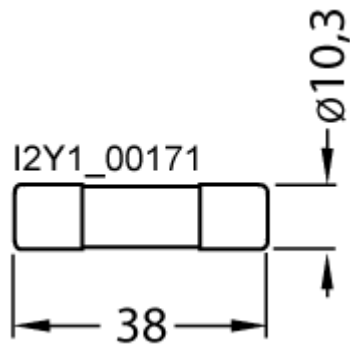

---

last modified:

11/14/2025 

