



Auxiliary switch, 1 NO+1 NC, accessories for main and emergency switching-off 3LD2 switch floor mounting, installation in distribution boards, molded-plastic encapsulation and for molded case switch 3LD5 UL floor mounting

Model	
product brand name	SETRON
product designation	auxiliary switch
design of the product	accessories for 3LD2 main and EMERGENCY-STOP switches, floor mounting, installation in distribution boards, molded-plastic enclosure
operational current	
<ul style="list-style-type: none"> <li>at AC-15 at 110 V rated value</li> <li>at AC-15 at 230 V rated value</li> <li>at AC-15 at 500 V rated value</li> <li>at DC-13 at 24 V rated value</li> </ul>	6 A 3 A 1.4 A 4 A
suitability for use	for 3LD2 floor mounting, distribution board mounting, in the enclosure, with EMC shield plate and for 3LD5 UL floor mounting
special product feature	NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch
Accessories	
accessories	auxiliary switch, 1 NO + 1 NC
tightening torque with screw-type terminals	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	0.8 N·m 1.2 N·m
type of connectable conductor cross-sections for auxiliary contacts	
<ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> <li>stranded</li> </ul>	2x (0.75-2.5 mm <sup>2</sup> ), 1x 4 mm <sup>2</sup> 2x (0.75-2.5 mm <sup>2</sup> ), 1x 4 mm <sup>2</sup> 2x (0.75-2.5 mm <sup>2</sup> ), 1x 4 mm <sup>2</sup>
Mechanical Design	
Net Weight	24.5 g
Approvals Certificates	
Environment	General Product Approval

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)



General Product Approval



[Miscellaneous](#)



## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9200-5C>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3LD9200-5C>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3LD9200-5C](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9200-5C)

### CAX-Online-Generator


<https://www.siemens.com/cax>

### Tender specifications

<https://www.siemens.com/specifications>

### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

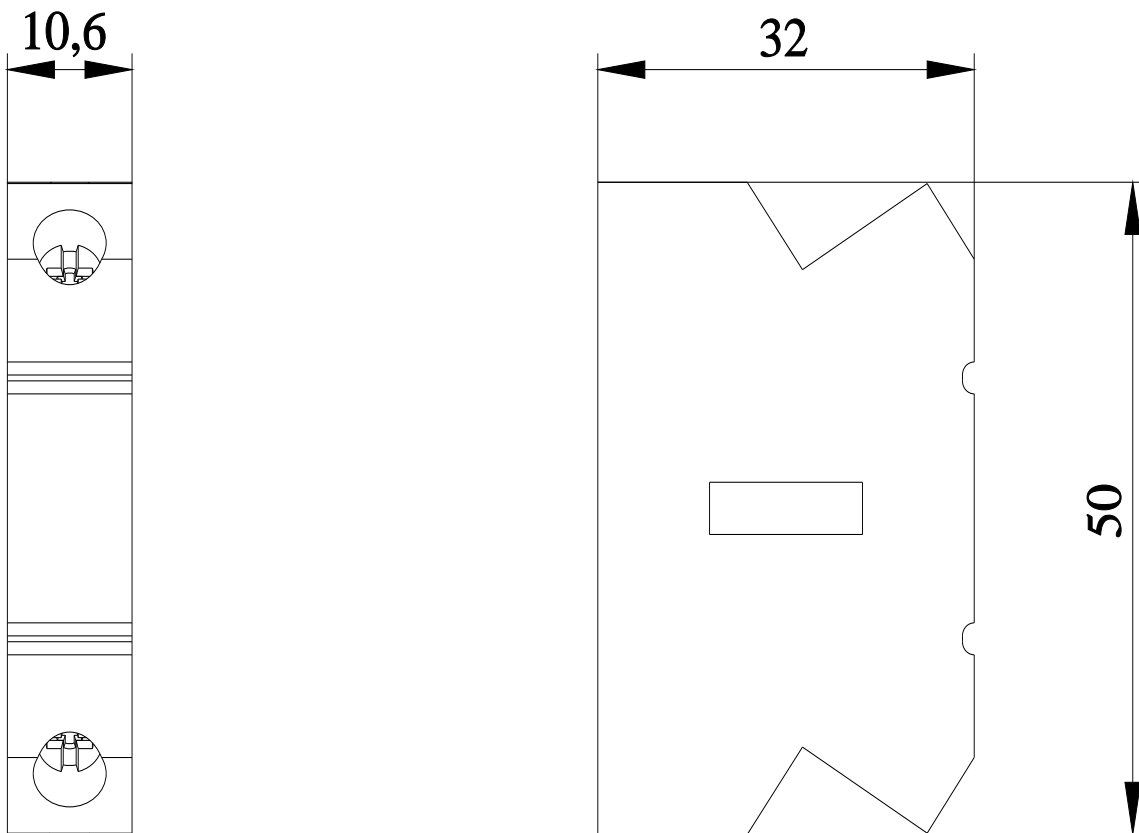

last modified:

4/12/2025 

