

# Fișă tehnică produs

Specificatii



unitate luminoasa Ø 70 mm, clipire, incolora, IP65, 24 V

XVBC5B7

⚠ Fabricatie intrerupta la data de: 5 nov. 2024

⚠ Finalul ciclului de service: 31 dec. 2025

⚠ Va fi retras de la comercializare

## Principale

gama de produse	Harmony XVB Universal
Tip produs sau componenta	Baterie de indicatoare
unitate tip far sau baterie de indicatoare	Unitate iluminata
tip semnalizare	Intermitent
diametrul de montaj	70 mm
nume componenta	XVBC
material	Policarbonat
sursa de lumina	LED integral, clar
tip bec	LED protejat
[Us] tensiune de alimentare nominala	24 V c.a./c.c.

## Suplimentare

stil de asamblare	Ansamblu client, pana la 5 unitati
conexiuni - borne	Borne cu surub, <= 1 x 1,5 mm <sup>2</sup> cu pini
[Ui] tensiune nominala de izolatie	250 V conformitate cu IEC 60947-1
limita de tensiune nominala	0,85...1,1 Un conformitate cu SR EN 60947-5-1
consum de curent	< 47 mA c.a./c.c.
[Uimp] tensiune de tinere la impuls	4 kV conformitate cu IEC 60947-1
frecventa intermitenta	1 Hz
CAD latime globala	70 mm
CAD inaltime globala	63 mm
CAD adancime globala	70 mm
greutate produs	0,17 kg

## Mediu

Grad de poluare	2
certificari produs	CCC EAC CSA C22-2 Nr. 14 UL 508
standarde	SR EN 60947-5-1
tratament protector	TC

temperatura ambietala pentru depozitare	-40...70 °C
clasa de protectie la electrocutare	Clasa I pe tubul suport conformitate cu IEC 61140 Clasa II pe bază conformitate cu IEC 61140
grad de protectie IP	IP65 pe baza XVBZ0. conformitate cu SR EN 60529 IP66 pe bază conformitate cu SR EN 60529
grad de protectie NEMA	Type 4X conformitate cu UL (în interior)

## Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Numar unitati in prima forma de impachetare	1
Inaltime prima forma de impachetare	8,0 cm
Latime prima forma de impachetare	8,0 cm
Lungime prima forma de impachetare	9,5 cm
Greutate prima forma de impachetare	138,0 g
Unitate de masura pentru a doua forma de impachetare	S03
Numar unitati in a doua forma de impachetare	36
Inaltime a doua forma de impachetare	30,0 cm
Latime a doua forma de impachetare	30,0 cm
Lungime a doua forma de impachetare	40,0 cm
Greutate a doua forma de impachetare	5,745 kg

## Garanție contractuală

Garantie	18 luni
----------	---------

## Environmental Data

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

### **Amprenta de mediu**

Amprenta de carbon (kg CO2 eq.)	13
---------------------------------	----

### **Use Better**

#### **Materiale si ambalare**

Pachet cu carton reciclabil	Da
-----------------------------	----

Ambalaj fara plastic	Da
----------------------	----

<a href="#">Directiva RoHS UE</a>	Conformitate proactiva (Produs in afara domeniului de aplicare a EU RoHS)
-----------------------------------	---------------------------------------------------------------------------

Numar SCIP	124e2d7a-5b1e-45ca-b93c-220dd91b55b6
------------	--------------------------------------


Regulamentul REACH	<a href="#">Declaratia REACH</a>
--------------------	----------------------------------

### **Use Again**

#### **Reambalare si refabricare**

Profil circularitate	<a href="#">Nu sunt necesare operatii de reciclare speciale</a>
----------------------	-----------------------------------------------------------------

Preluare la sfarsitul duratei de viata	No
----------------------------------------	----


DEEE	 Produsul trebuie sa fie eliminat de pe piata din Uniunea Europeana dupa colectarea specifica a deseurilor si sa nu ajunga niciodata in pubele de gunoi
------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Dimensions Drawings

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

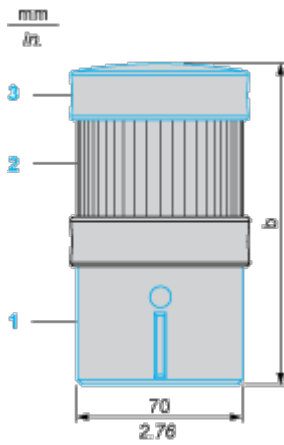


- (1) Base unit XVBC21, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) Cover (supplied with XVBC21 base unit)

Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

**Indicator Bank with “Flash” Discharge Tube Unit**

**Dimensions**

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

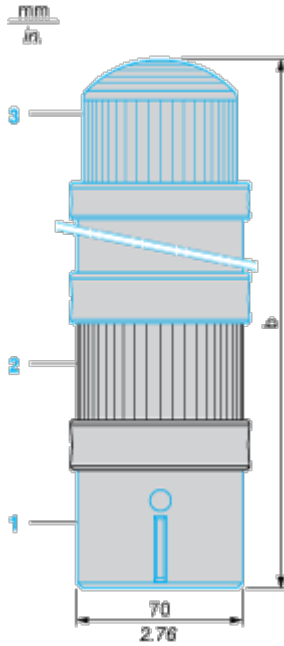


- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) “Flash” unit, to be ordered separately

Number of illuminated or audible signalling units other than “flash” tube	b in mm	b in in.
1	295	11.61
2	358	14.09
3	421	16.57
4	484	19.06

Technical Illustration

Dimensions

---

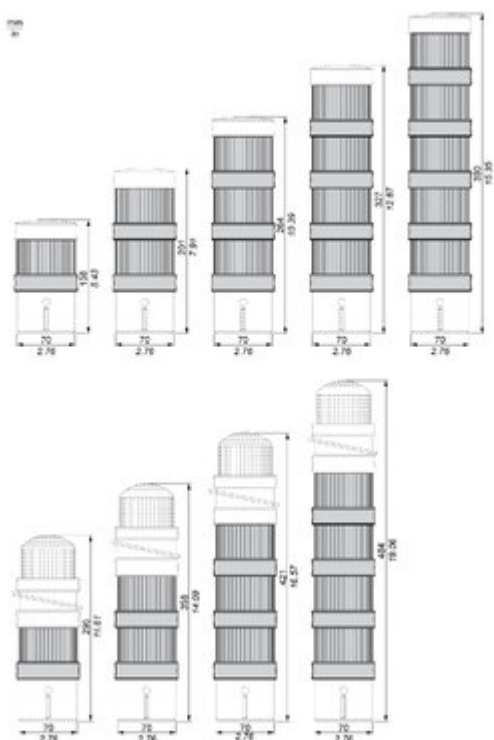

Offer Marketing Illustration

Product benefits / Features

---

**Features**  
Harmony XVB

**3 types of light source:**  
10-Watt incandescent bulb,  
built-in high-efficiency  
LEDs, 5 and 10-joule  
discharge tube

100,000 hours of  
maintenance-free lighting  
thanks to "LED Protected"  
technology

Connector with  
removable base, axial,  
or side cable entry,  
immediate assembly, and  
fixing using a locking ring

High degree of protection  
(IP66) and Shock  
resistance (IK05)

Fully flexible and interchangeable  
construction of up to 5 lens units  
(six colors of light lens unit)

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Greater loudness up to 90dB with continuous and intermittent tones



Conformity with International standards



Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding



Image of product / Alternate images

Alternative

---





Image of product in real life situation

