

Pin busbar touch-safe, 16 mm<sup>2</sup> 3-phase+AUX, 214 mm long can be cut, with end caps



Figure similar

|   |                          |
|---|--------------------------|
| product brand name  | SENTRON                  |
| product designation                                       | Pin busbar               |
| design of the product                                     | 4x (3PH+HS)              |
| design of the phase tap                                   | L1/L2/L3                 |
| <b>General technical data</b>                             |                          |
| compatibility   | for MCBs 3P              |
| design of pole  | 3 poles                  |
| phase number  | 3                        |
| operational current rated value                           | 80 A                     |
| suitability for interaction devices with auxiliary switch | Yes                      |
| suitability for interaction devices with N conductor      | No                       |
| color   | light grey               |
| <b>Product details</b>                                    |                          |
| product component with end cap                            | Yes                      |
| product feature attachable arc fault detection device     | No                       |
| product feature insulated                                 | Yes                      |
| product function  |                          |
| • suitable for compact devices                            | No                       |
| • can be cut  | Yes                      |
| number of devices suitable for fitting                    | 4                        |
| type of electrical connection                             | Pin                      |
| <b>Mechanical Design</b>                                  |                          |
| module width  | 18 mm                    |
| height  | 15 mm                    |
| width   | 18 mm                    |
| length  | 214 mm                   |
| number of modular width units                             | 12                       |
| cross-section   | 16 mm <sup>2</sup>       |
| angle of the pin of busbar                                | 0°                       |
| Net Weight  | 100 g                    |
| <b>Approvals Certificates</b>                             |                          |
| Environment   | General Product Approval |

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)



[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3711>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3711>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3711](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3711)

CAX-Online-Generator


<https://www.siemens.com/cax>


Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

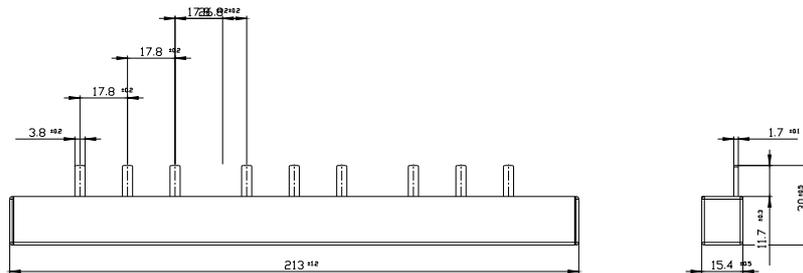



---

last modified:

8/8/2025 

