










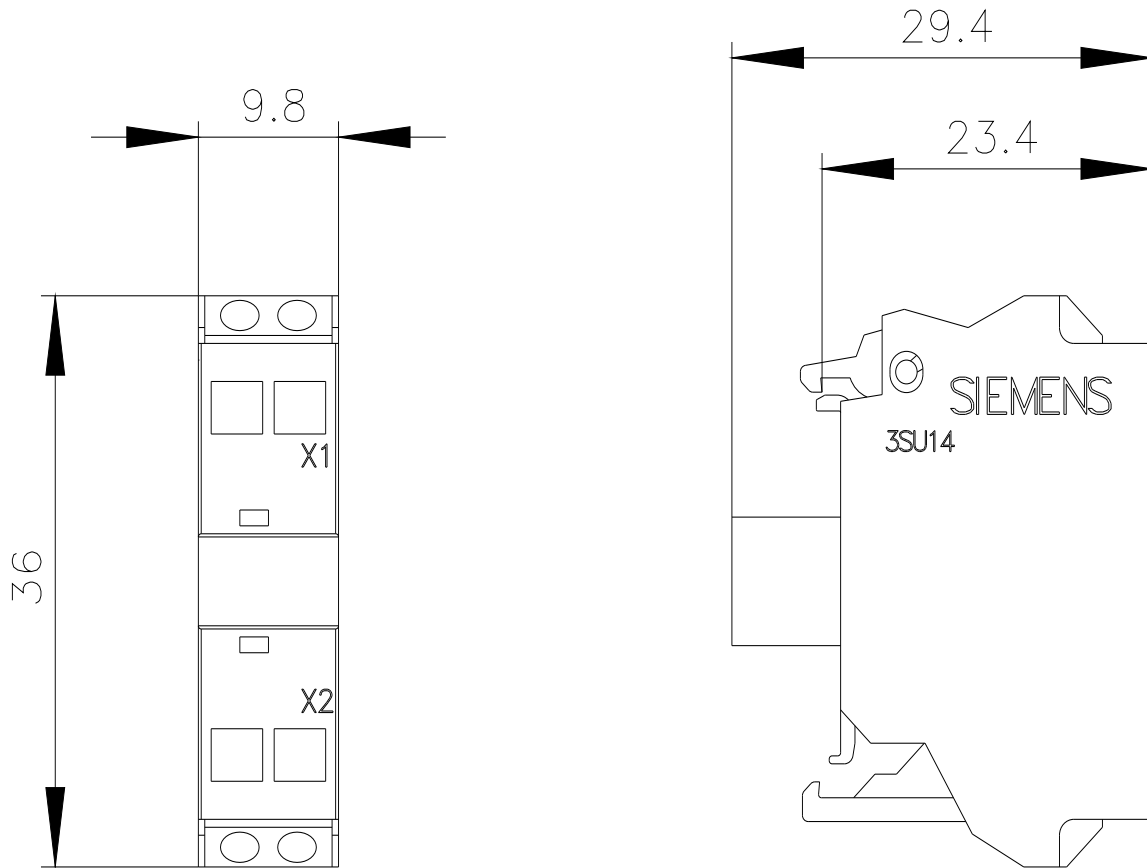
Siemens
EcoTech



LED module with integrated LED, 24-240 V AC/DC, red, spring-type terminal, for front plate mounting

| | |
|--|--|
| product brand name | SIRIUS ACT |
| product designation | LED module |
| product type designation | 3SU1 |
| General technical data | |
| product component | |
| • diode | Yes |
| • lamp transformer | No |
| • light source | Yes |
| • series resistor | No |
| insulation voltage rated value | 320 V |
| degree of pollution | 3 |
| type of voltage of the operating voltage | AC/DC |
| • for actuation | AC/DC |
| surge voltage resistance rated value | 4 kV |
| consumed current maximum | 20 mA |
| protection class IP | |
| • of the enclosure | IP40 |
| • of the terminal | IP20 |
| shock resistance | |
| • according to IEC 60068-2-27 | sinusoidal half-wave 15 g / 11 ms |
| • for railway applications according to EN 61373 | Category 1, Class B |
| vibration resistance | |
| • according to IEC 60068-2-6 | 10 ... 500 Hz: 5 g |
| • for railway applications according to EN 61373 | Category 1, Class B |
| operating period typical | 100 000 h |
| reference code according to IEC 81346-2 | P |
| Substance Prohibitance (Date) | 10/01/2014 |
| SVHC substance name | Lead CAS-No. 7439-92-1 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 |
| Net Weight | 10 g |
| operating voltage | |
| • at AC | |
| — at 50 Hz rated value | 24 ... 240 V |
| — at 60 Hz rated value | 24 ... 240 V |
| • at DC rated value | 24 ... 240 V |

| | |
|--|--|
| relative positive tolerance of the operating voltage | 20 % |
| relative negative tolerance of the operating voltage | 30 % |
| Control circuit/ Control | |
| inrush current maximum | 3 A |
| Connections/ Terminals | |
| type of electrical connection | spring-loaded terminals |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • solid without core end processing | 2x (0.25 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • finely stranded with core end processing | 2x (0.25 ... 0.75 mm ²) |
| <ul style="list-style-type: none"> • finely stranded without core end processing | 2x (0.25 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • for AWG cables | 2x (24 ... 16) |
| connectable conductor cross-section finely stranded with core end processing | 0.25 ... 0.75 mm ² |
| Lamp | |
| type of light source | LED |
| color of the light source | red |
| light intensity | 450 ... 1 120 mcd |
| ATEX | |
| certificate of suitability | |
| <ul style="list-style-type: none"> • ATEX | No |
| <ul style="list-style-type: none"> • IECEx | No |
| Ambient conditions | |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +70 °C |
| <ul style="list-style-type: none"> • during storage | -40 ... +80 °C |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted) |
| Installation/ mounting/ dimensions | |
| fastening method | |
| <ul style="list-style-type: none"> • of modules and accessories | Front plate mounting |
| height | 36 mm |
| width | 9.8 mm |
| depth | 29.4 mm |
| Approvals Certificates | |
| Environmental Product Declaration | |
| <ul style="list-style-type: none"> • global warming potential [CO2 eq] / during manufacturing | 0.566 kg |
| <ul style="list-style-type: none"> • global warming potential [CO2 eq] / during operation | 0.235 kg |
| <ul style="list-style-type: none"> • global warming potential [CO2 eq] / after end of life | -0.0145 kg |
| <ul style="list-style-type: none"> • global warming potential [CO2 eq] / total | 0.787 kg |
| Environment | General Product Approval |
| Environmental Conformations      | |
| Maritime application | other |
|     | Confirmation |
| Further information | |
| Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 | |
| Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012 | |
| Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 | |
| Industry Mall (Online ordering system) | |





last modified:

4/4/2026 