

Busbar, with punchings, Module width 27 mm for NEOZED fuse base D02 CU blank, 36 mm², 1000mm




Model	
product brand name	SETRON
product designation	NEOZED busbar
design of the product	D02, CU 36mm ²
busbar design	flat
General technical data	
surface processing tin-plated	No
Main circuit	
operational current rated value	168 A
Product details	
product feature flexible	Yes
Mechanical Design	
width	3 mm
length	1 000 mm
thickness of busbar	12 mm
Net Weight	260 g
material of the busbar	SF-Cu F 24
Approvals Certificates	
Environment	General Product Approval

[Environmental Conformations](#)

[Environmental Conformations](#)



Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SH5322 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/5SH5322 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SH5322 CAX-Online-Generator https://www.siemens.com/cax Tender specifications https://www.siemens.com/specifications

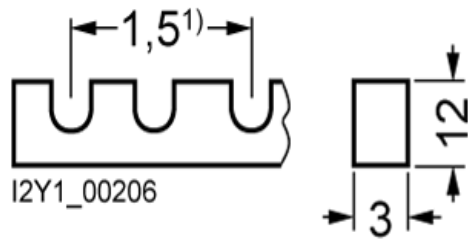

¹⁾ Fork spacings in MW (Modular widths, 1 MW = 18

last modified:

4/6/2026 

