

# Fișă tehnică produs

Specificatii



Cap de buton, Easy Harmony XB2,  
metal, negru, 22mm, cu revenire,  
booted, nemarcat

ZB2BP2C

## Principale

gama de produse	Easy Harmony XB2
Tip produs sau componenta	Cap pentru buton neiluminat
nume scurt al dispozitivului	XB2
material rama	Metal cromat
diametrul de montaj	22,5 mm
cantitate indivizibila de vanzare	1
marcaj	Nemarcat
informatii suplimentare operator	Invelit
prezentare dispozitiv	Element de baza

## Suplimentare

destinatie produs	Buton
Compatibilitate produs	XB2..C
tip cap	Standard
forma a capului unitatii de semnalizare	Rotund
tip de operator	revenire cu arc
resetare	Spring reset
profil utilizator	Negru booted covered head, nemarcat
durabilitate mecanica	3000000 cic
inaltime	29 mm
latime	29 mm
adancime	30 mm
greutate produs	0,025 kg
capac/operator sau culoare lentila	Negru
personalizabil	Nu
tip de operator	Revenire cu arc

## Mediu

tratament protector	TC/TH
temperatura ambietala pentru depozitare	-40...70 °C
temperatura ambientala de functionare	-25...70 °C

standarde	SR EN 60947-5-1 SR EN 60947-5-4 IEC 60947-1 GB/T 14048.1 GB/T 14048.5
certificari produs	CCC UE
rezistenta la vibratii	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
rezistenta la socuri	30 gn (durata = 18 ms) pentru half sine wave acceleration conformitate cu IEC 60068-2-27 50 gn (durata = 11 ms) pentru half sine wave acceleration conformitate cu IEC 60068-2-27
grad de protectie IP	IP65
grad de protectie IK	IK06

## Unitati de ambalare

Unitate de masura pentru prima forma de impachetare	PCE
Numar unitati in prima forma de impachetare	1
Inaltime prima forma de impachetare	2,500 cm
Latime prima forma de impachetare	2,500 cm
Lungime prima forma de impachetare	3,000 cm
Greutate prima forma de impachetare	27,000 g
Unitate de masura pentru a doua forma de impachetare	S02
Numar unitati in a doua forma de impachetare	150
Inaltime a doua forma de impachetare	15,000 cm
Latime a doua forma de impachetare	30,000 cm
Lungime a doua forma de impachetare	40,000 cm
Greutate a doua forma de impachetare	4,310 kg
Unitate de masura pentru a treia forma de impachetare	P06
Numar unitati in a treia forma de impachetare	2400
Inaltime a treia forma de impachetare	75,000 cm
Latime a treia forma de impachetare	60,000 cm
Lungime a treia forma de impachetare	80,000 cm
Greutate a treia forma de impachetare	76,960 kg

## Garanție contractuală

Garantie	18 luni
----------	---------

## Environmental Data

Schneider Electric isi propune sa atinga nivelul Net Zero pana in 2050 prin parteneriate la nivelul lantului de aprovizionare, materiale cu impact mai redus si circularitate, prin campania „Use Better, Use Longer, Use Again” pentru a extinde durata de viata a produselor si reciclabilitatea.

[Environmental Data explicate >](#)

[Cum evaluam sustenabilitatea produselor >](#)

### **Amprenta de mediu**

Amprenta de carbon (kg CO2 eq.) 1

Raport de mediu [Profilul ambiental al produsului](#)

### **Use Better**

#### **Materiale si ambalare**

Ambalaj fara plastic Nu

[Directiva RoHS UE](#) Conformitate proactiva (Produs in afara domeniului de aplicare a EU RoHS)

Regulamentul REACH [Declaratia REACH](#)

### **Use Again**

#### **Reambalare si refabricare**


Profil circularitate Nu sunt necesare operatii de reciclare speciale

Preluare la sfarsitul duratei de viata No

Dimensions Drawings

Dimensions


---

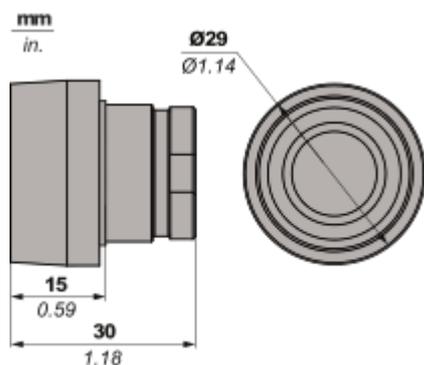

Mounting and Clearance

Mounting and Clearance

Panel cut-out

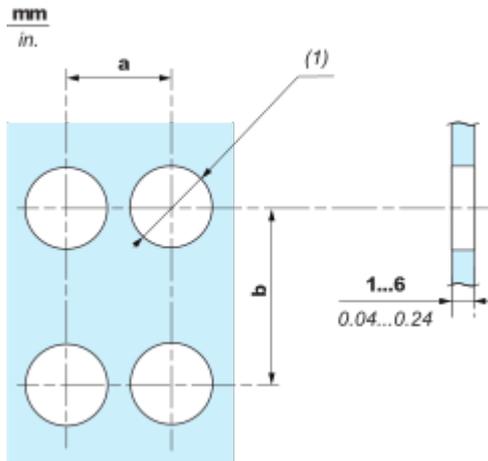


	Connection by Screw clamp terminals			
	a in mm	a in in.	b in mm	b in in.
•B2BA•C / •B2BL•C / •B2BP•C / •B2BS4•C / •B2BD•C / •B2BJ•C / •B2BG•C / •B2BW•C	40	1.57	30	1.18
•B2BC•C / •B2BS5•C / •B2BS8•C / •B2BT•C	40	1.57	40	1.57
•B2BR•C / •B2BS6•C	60	2.36	60	2.36

(1)  $\varnothing 22.5 \text{ mm} / 0.89 \text{ in. recommended } (\varnothing 22.3 \text{ mm }_0^{+0.4} / 0.88 \text{ in. }_0^{+0.016})$

Technical Illustration

Dimensions

---

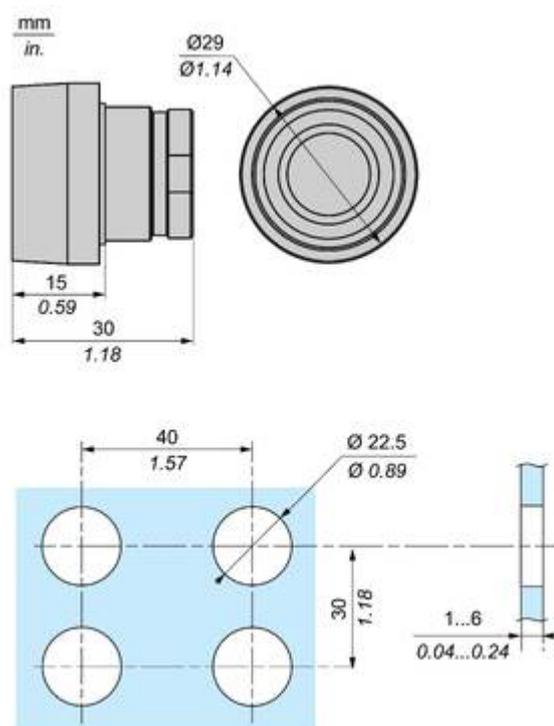

Offer Marketing Illustration

Product benefits / Features

---

**Features**  
Easy Harmony XB2

- 

Metal bezels with metal fixing collars for impact endurance
- 

Designed to be used in numerous control and signaling applications
- 

Metal screws for secure fix, grounding contact to the panel and anti-rotation
- 

Simple modular design facilitates post installation servicing, modification and adaption of machines by non-specialists
- 

Available in sub-assemblies for easy mix and match of functionalities

Offer Marketing Illustration

Product benefits / Features

---

**Features**  
Easy Harmony XB2



- Metal bezels with metal fixing collars for impact endurance
- Designed to be used in numerous control and signaling applications
- Metal screws for secure fix, grounding contact to the panel and anti-rotation
- Simple modular design facilitates post installation servicing, modification and adaptation of machines by non-specialists
- Available in sub-assemblies for easy mix and match of functionalities

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Easy Harmony XB2

Supports operating temperature from -25°C to +70°C

Excellent resistance to mechanical shock and vibration




Conforming to CE, CCC and ROHS standards

Up to IP65 protection ratings

Image of product / Alternate images

Alternative

---

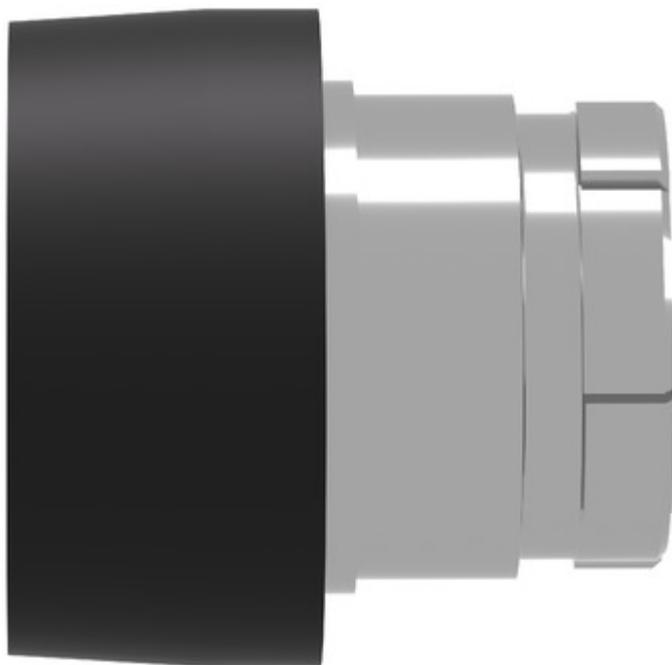



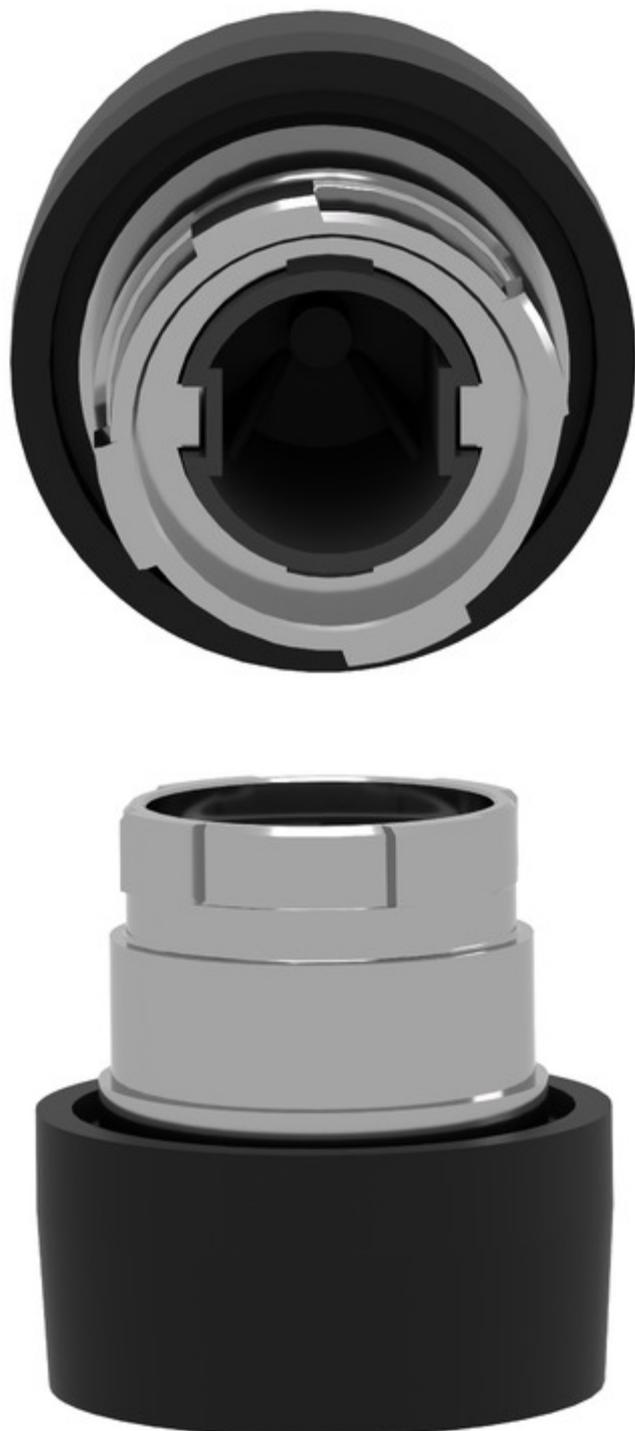


Image of product in real life situation

