



Circuit breaker size S00 for motor protection, CLASS 10 A-release 1.8...2.5 A N-release 33 A screw terminal Standard switching capacity

|  |                        |
|--|------------------------|
| <b>product brand name</b>  | SIRIUS                 |
| <b>product designation</b>   | Circuit breaker        |
| <b>design of the product</b>   | For motor protection   |
| <b>product type designation</b>  | 3RV2                   |
| <b>General technical data</b>  |                        |
| <b>size of the circuit-breaker</b>   | S00                    |
| <b>size of contactor can be combined company-specific</b>                                  | S00, S0                |
| product extension auxiliary switch   | Yes                    |
| <b>power loss [W] for rated value of the current</b>                                       |                        |
| • at AC in hot operating state   | 7.25 W                 |
| • at AC in hot operating state per pole  | 2.4 W                  |
| insulation voltage with degree of pollution 3 at AC rated value                            | 690 V                  |
| <b>surge voltage resistance rated value</b>  | 6 kV                   |
| <b>shock resistance according to IEC 60068-2-27</b>  | 25g / 11 ms            |
| <b>mechanical service life (operating cycles)</b>  |                        |
| • of the main contacts typical   | 100 000                |
| • of auxiliary contacts typical  | 100 000                |
| electrical endurance (operating cycles) typical  | 100 000                |
| <b>reference code according to IEC 81346-2</b>   | Q                      |
| <b>Substance Prohibitance (Date)</b>   | 10/01/2009             |
| <b>SVHC substance name</b>   | Lead CAS-No. 7439-92-1 |
| <b>Net Weight</b>  | 348 g                  |
| <b>Ambient conditions</b>  |                        |
| installation altitude at height above sea level maximum                                    | 2 000 m                |
| <b>ambient temperature</b>   |                        |
| • during operation   | -20 ... +60 °C         |
| • during storage   | -50 ... +80 °C         |
| • during transport   | -50 ... +80 °C         |
| relative humidity during operation   | 10 ... 95 %            |
| <b>Main circuit</b>  |                        |
| <b>number of poles for main current circuit</b>  | 3                      |
| <b>adjustable current response value current of the current-dependent overload release</b> | 1.8 ... 2.5 A          |
| <b>type of voltage for main current circuit</b>  | AC                     |
| <b>operating voltage</b>   |                        |
| • rated value  | 20 ... 690 V           |

|  |                                       |
|--|---------------------------------------|
| <ul style="list-style-type: none"> <li>● at AC-3 rated value maximum</li> </ul>  | 690 V                                 |
| <ul style="list-style-type: none"> <li>● at AC-3e rated value maximum</li> </ul>   | 690 V                                 |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz                          |
| <b>operational current rated value</b>   | 2.5 A                                 |
| <b>operational current</b>   |                                       |
| <ul style="list-style-type: none"> <li>● at AC-3 at 400 V rated value</li> </ul>   | 2.5 A                                 |
| <ul style="list-style-type: none"> <li>● at AC-3e at 400 V rated value</li> </ul>  | 2.5 A                                 |
| <b>operating power</b>   |                                       |
| <ul style="list-style-type: none"> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul>  | 0.4 kW<br>0.75 kW<br>1.1 kW<br>1.5 kW |
| <ul style="list-style-type: none"> <li>● at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 0.4 kW<br>0.75 kW<br>1.1 kW<br>1.5 kW |
| <b>operating frequency</b>   |                                       |
| <ul style="list-style-type: none"> <li>● at AC-3 maximum</li> </ul>  | 15 1/h                                |
| <ul style="list-style-type: none"> <li>● at AC-3e maximum</li> </ul>   | 15 1/h                                |

#### Auxiliary circuit

|  |       |
|--|-------|
| <b>type of voltage for auxiliary and control circuit</b> | AC/DC |
| <b>number of NC contacts for auxiliary contacts</b>      | 0     |
| <b>number of NO contacts for auxiliary contacts</b>      | 0     |
| number of CO contacts for auxiliary contacts             | 0     |

#### Protective and monitoring functions

|  |          |
|--|----------|
| <b>product function</b>  |          |
| <ul style="list-style-type: none"> <li>● ground fault detection</li> </ul>     | No       |
| <ul style="list-style-type: none"> <li>● phase failure detection</li> </ul>    | Yes      |
| <b>trip class</b>  | CLASS 10 |
| <b>design of the overload release</b>  | thermal  |
| <b>maximum short-circuit current breaking capacity (Icu)</b>                   |          |
| <ul style="list-style-type: none"> <li>● at AC at 240 V rated value</li> </ul> | 100 kA   |
| <ul style="list-style-type: none"> <li>● at AC at 400 V rated value</li> </ul> | 100 kA   |
| <ul style="list-style-type: none"> <li>● at AC at 500 V rated value</li> </ul> | 100 kA   |
| <ul style="list-style-type: none"> <li>● at AC at 690 V rated value</li> </ul> | 10 kA    |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b>           |          |
| <ul style="list-style-type: none"> <li>● at 240 V rated value</li> </ul>       | 100 kA   |
| <ul style="list-style-type: none"> <li>● at 400 V rated value</li> </ul>       | 100 kA   |
| <ul style="list-style-type: none"> <li>● at 500 V rated value</li> </ul>       | 100 kA   |
| <ul style="list-style-type: none"> <li>● at 690 V rated value</li> </ul>       | 10 kA    |
| response value current of instantaneous short-circuit trip unit                | 33 A     |

#### UL/CSA ratings

|  |   |
|--|---|
| <b>full-load current (FLA) for 3-phase AC motor</b>  |   |
| <ul style="list-style-type: none"> <li>● at 480 V rated value</li> </ul>   | 2.5 A                                       |
| <ul style="list-style-type: none"> <li>● at 600 V rated value</li> </ul>   | 2.5 A                                       |
| <b>yielded mechanical performance [hp]</b>   |   |
| <ul style="list-style-type: none"> <li>● for single-phase AC motor <ul style="list-style-type: none"> <li>— at 230 V rated value</li> </ul> </li> </ul>  | 0.17 hp                                     |
| <ul style="list-style-type: none"> <li>● for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 0.5 hp<br>0.5 hp<br>1 hp<br>1.5 hp          |
| <b>UL File Number (CCN)</b>  | E47705 (NLRV, NLRV7), E156943 (NKJH, NKJH7) |

#### Short-circuit protection

|  |          |
|--|----------|
| <b>product function short circuit protection</b> | Yes      |
| <b>design of the short-circuit trip</b>          | magnetic |

|  |  |
|--|--|
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>   |  |
| <ul style="list-style-type: none"> <li>• at 400 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>   | gL/gG 25 A<br>gL/gG 25 A<br>gL/gG 20 A   |
| <b>Installation/ mounting/ dimensions</b>  |  |
| <b>mounting position</b>   | any  |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |
| <b>height</b>  | 97 mm  |
| <b>width</b>   | 45 mm  |
| <b>depth</b>   | 97 mm  |
| <b>required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> <li>• for grounded parts at 400 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 400 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 500 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 500 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 690 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for live parts at 690 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | 0 mm<br>30 mm<br>30 mm<br>9 mm<br>30 mm<br>30 mm<br>9 mm<br>30 mm<br>30 mm<br>9 mm<br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm<br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm |
| <b>Connections/ Terminals</b>  |  |
| <b>type of electrical connection</b>   |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>   | screw-type terminals   |
| <b>arrangement of electrical connectors for main current circuit</b>   | Top and bottom   |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• for main contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for main contacts</li> </ul>   | 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (18 ... 14), 2x 12               |
| <b>tightening torque</b>   |  |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>  | 0.8 ... 1.2 N·m  |
| <b>design of screwdriver shaft</b>   | Diameter 5 to 6 mm   |
| <b>size of the screwdriver tip</b>   | Pozidriv size 2  |
| <b>design of the thread of the connection screw</b>  |  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> </ul>  | M3   |
| <b>Safety related data</b>   |  |
| product function suitable for safety function  | Yes  |

|  |        |
|--|--------|
| <b>suitability for use</b>   |        |
| • safety-related switching on  | No     |
| • safety-related switching OFF                                       | Yes    |
| <b>service life maximum</b>  | 10 a   |
| <b>test wear-related service life necessary</b>                      | Yes    |
| <b>proportion of dangerous failures</b>                              |        |
| • with low demand rate according to SN 31920                         | 40 %   |
| • with high demand rate according to SN 31920                        | 50 %   |
| <b>B10 value with high demand rate according to SN 31920</b>         | 5 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 50 FIT |

**ISO 13849**

|  |     |
|--|-----|
| <b>device type according to ISO 13849-1</b>                | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b> | Yes |

**IEC 61508**

|  |        |
|--|--------|
| <b>safety device type according to IEC 61508-2</b>               | Type A |
| <b>T1 value</b>  |        |
| • for proof test interval or service life according to IEC 61508 | 10 a   |

**Electrical Safety**

|  |  |
|--|--|
| <b>protection class IP on the front according to IEC 60529</b> | IP20   |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

**Display**

|                                      |        |
|--------------------------------------|--------|
| display version for switching status | Handle |
|--------------------------------------|--------|

**Approvals Certificates**

**Environmental Product Declaration**

|  |           |
|--|-----------|
| • global warming potential [CO2 eq] / during manufacturing | 1.98 kg   |
| • global warming potential [CO2 eq] / during sales         | 0.134 kg  |
| • global warming potential [CO2 eq] / during operation     | 72.7 kg   |
| • global warming potential [CO2 eq] / after end of life    | -0.116 kg |
| • global warming potential [CO2 eq] / total                | 74.698 kg |

**Environment** **General Product Approval**

[Environmental Confirmations](#)

**General Product Approval** **For use in hazardous locations** **Maritime application**

**Maritime application** **other**

**other**

[Confirmation](#)      [Miscellaneous](#)

**Further information**

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1CA10>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1CA10>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**



[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2011-1CA10&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-1CA10&lang=en)



**Cax online generator**

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1CA10>

**Characteristic curves**

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

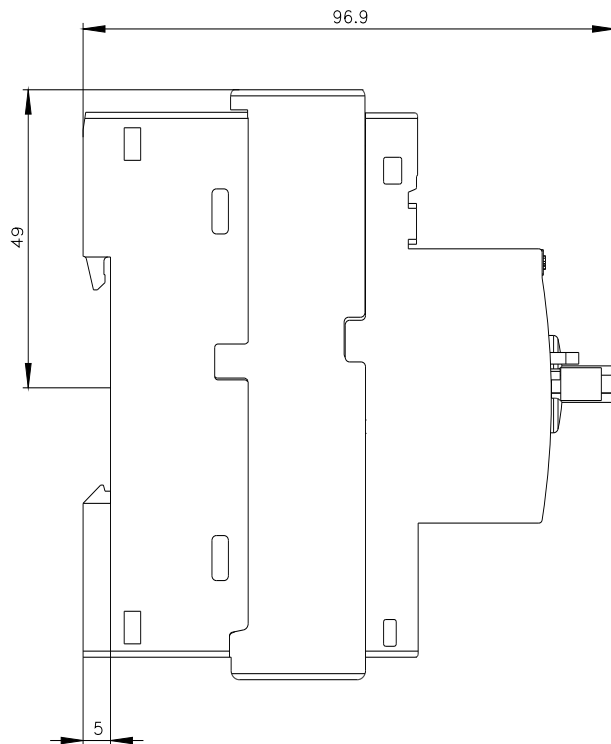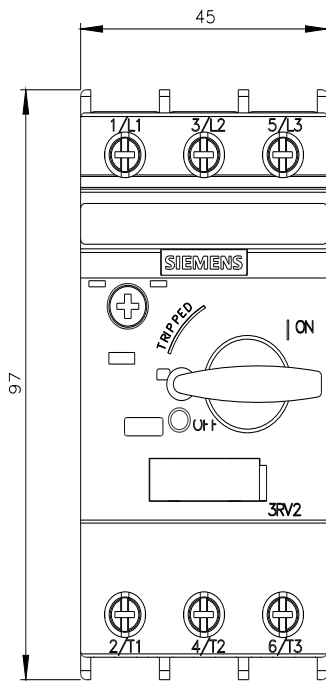

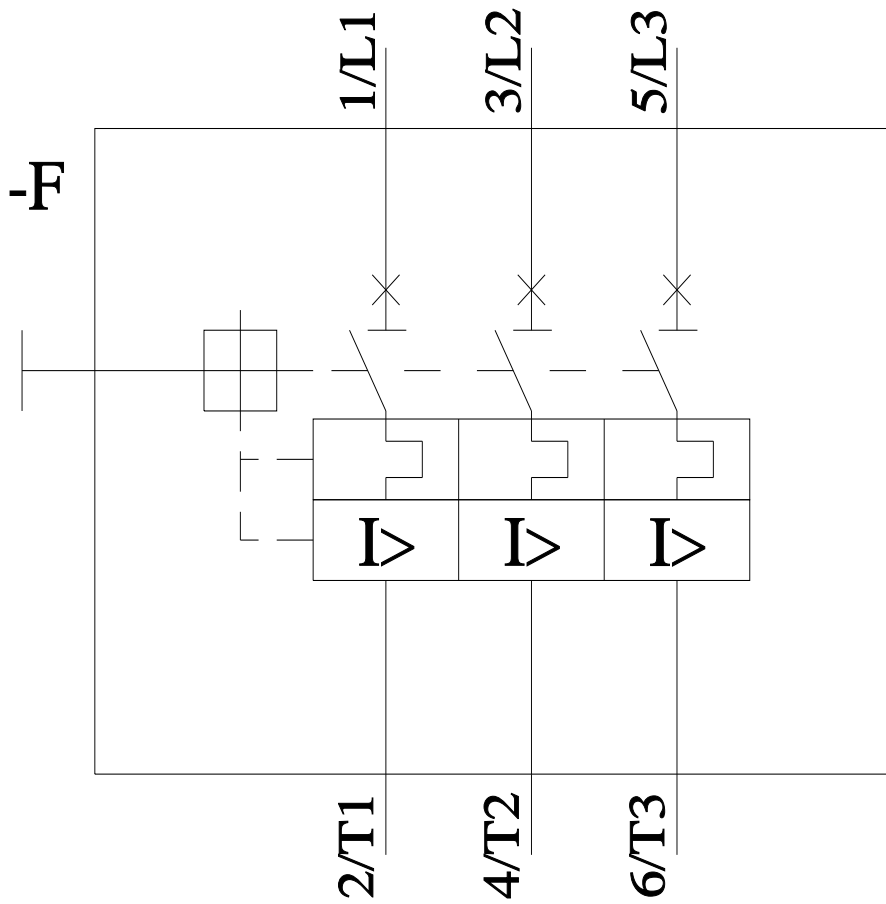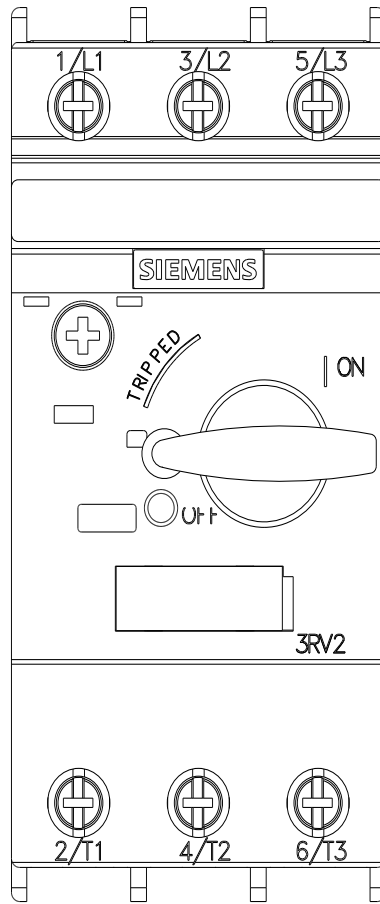

last modified:

3/8/2026 ↻