



connecting cable with M12 socket 5-pole and bare cable end, 5 m long, for connecting position switch 3SE51/52, wired with M12 plug, 5-pole

General technical data	
product brand name	SIRIUS
operational current at 40 °C rated value	4 A
operating voltage rated value	60 V
number of poles	5
insulation resistance	100 MΩ
wire length of connection cable	5 m
ambient temperature during operation	-25 ... +85 °C
connector coding of the M12 circular connector	A - Standard
type of electrical connection	connector M12
color coding of the core	Pin 1 = BN, pin 2 = WH, pin 3 = BU, pin 4 = BK, pin 5 = GY
overvoltage category	2
degree of pollution	3
protection class IP	IP67
material	
• of the contact	CuSn
• of contact coating	Au
• of contact main body	PUR
Certificates/ approvals	
General Product Approval	other Environment



[Confirmation](#)

[Environmental Confirmations](#)

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SX5601-3SB55>

#### Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SX5601-3SB55>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SX5601-3SB55>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SX5601-3SB55&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SX5601-3SB55&lang=en)

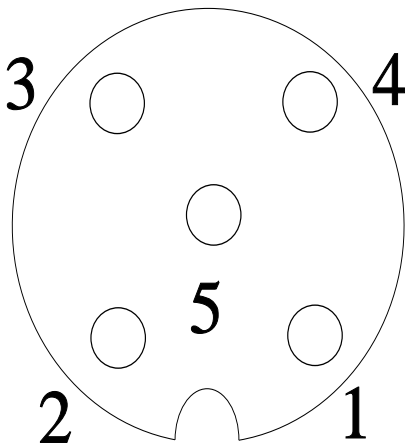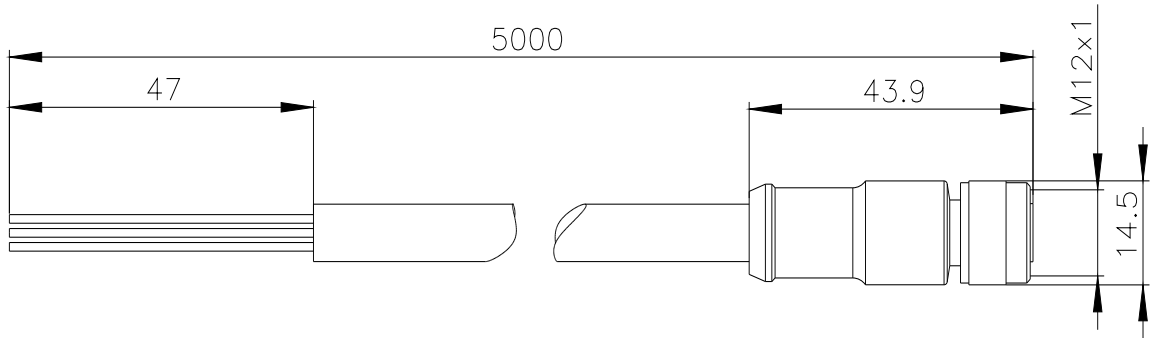

1	BN = Brown
2	WH = White
3	BU = Blue
4	BK = Black
5	GY = Grey

