


PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Ground terminal, nom. voltage: 500 V, nominal current: 15 A, connection method: Push-in connection, 1 level, Rated cross section: 1.5 mm², cross section: 0.14 mm² - 1.5 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Avantajele dumneavoastră

- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- The compact design and front connection enable wiring in a confined space
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- Tested for railway applications

Date comerciale

Număr articol	3213768
Unitate de ambalare	50 Bucată
Cantitate minimă pentru comandă	50 Bucată
Cod produs	BE2225
Pagina de catalog	Pagina 40 (C-1-2019)
GTIN	4046356572538
Greutate pe bucată (inclusiv ambalajul)	14,08 g
Greutate pe bucată (fără ambalaj)	14,08 g
Cod tarifar vamal	85369010
Țara de origine	PL

PT 1,5/S-PE/L/L - Ground terminal



3213768

<https://www.phoenixcontact.com/ro/produse/3213768>

Date tehnice

Product properties

Product type	Ground terminal block
Number of connections	6
Number of rows	3

Data management status

Article revision	05
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	1.5 mm ²

1 level

Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A1 / B1
Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
Conductor cross section rigid	0.14 mm ² ... 1.5 mm ²
Cross section AWG	26 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 1 mm ² Using the AI-S 1-8 TQ ferrule, Item No. 1200293, is recommended
Nominal current	15 A
Maximum load current	15 A
Nominal voltage	500 V
Nominal cross section	1.5 mm ²

1 level Connection cross sections directly pluggable

Conductor cross section rigid	0.25 mm ² ... 1.5 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.34 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.34 mm ² ... 1 mm ²

Dimensions

PT 1,5/S-PE/L/L - Ground terminal



3213768

<https://www.phoenixcontact.com/ro/produse/3213768>

Width	3.5 mm
End cover width	2.2 mm
Height	97.2 mm
Depth on NS 35/7,5	53.2 mm
Depth on NS 35/15	60.7 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
----------------------------------	-----------------------------

Mounting

Mounting type	NS 35/7,5
---------------	-----------

PT 1,5/S-PE/L/L - Ground terminal

3213768


<https://www.phoenixcontact.com/ro/produse/3213768>



NS 35/15

Desene

Circuit diagram

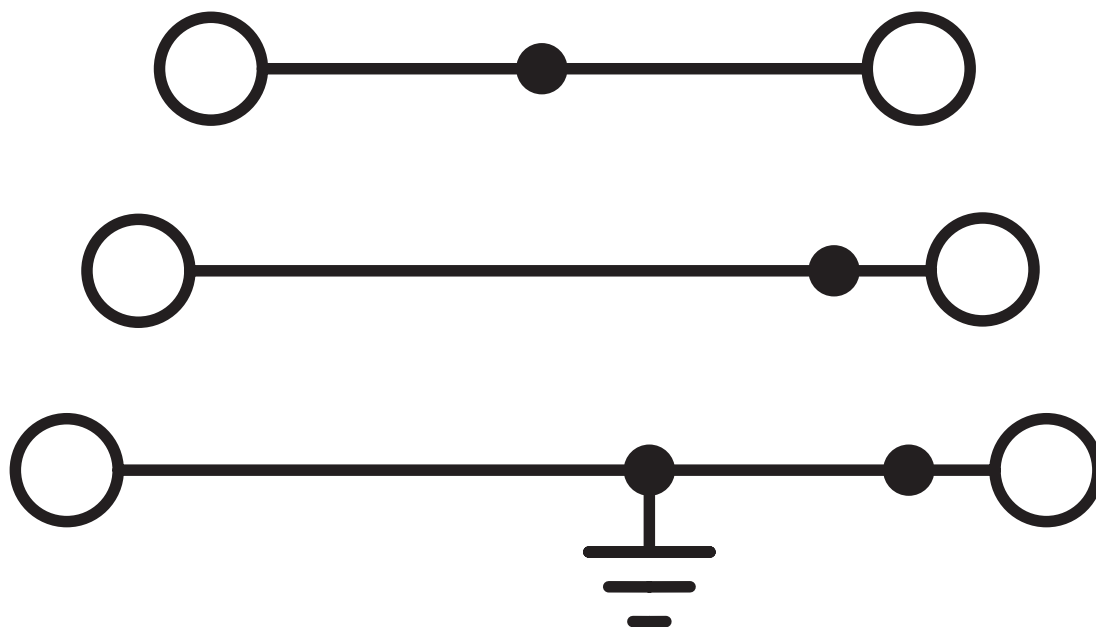

PT 1,5/S-PE/L/L - Ground terminal





3213768


<https://www.phoenixcontact.com/ro/produse/3213768>

Aprobări

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/produse/3213768>


 **CSA**
ID de înregistrare: 2030668

 **CSA**
ID de înregistrare: 2030668


 **EAC**
ID de înregistrare: RU C-DE.BL08.B.00644

 **cULus Recognized**
ID de înregistrare: E60425

	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
Use group B				
	300 V	15 A	26 - 14	-
PE connection	-	-	26 - 14	-
Use group C				
	300 V	15 A	26 - 14	-
PE connection	-	-	26 - 14	-
Use group D				
	600 V	5 A	26 - 14	-
PE connection	-	-	26 - 14	-

 **LR**
ID de înregistrare: LR2371832TA

 **ClassNK** **NK**
ID de înregistrare: 14ME0912

 **BV**
ID de înregistrare: 39980/B0 BV

DNV
ID de înregistrare: TAE000010T

PT 1,5/S-PE/L/L - Ground terminal



3213768

<https://www.phoenixcontact.com/ro/produse/3213768>

Clasificări

ECLASS

ECLASS-11.0	27141141
ECLASS-13.0	27250104

ETIM

ETIM 9.0	EC000901
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PT 1,5/S-PE/L/L - Ground terminal



3213768

<https://www.phoenixcontact.com/ro/produse/3213768>

Environmental product compliance

EU RoHS

Îndeplinește cerințele conform directivei RoHS	Da, Nicio reglementare privind excepțiile
--	---

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	Nu există substanțe periculoase peste valorile limită

EU REACH SVHC

Trimitere la substanța candidată REACH (nr. CAS)	Nicio substanță cu un procentaj masic mai mare de 0,1 %
--	---

EF3.0 Climate Change

CO2e kg	0,037 kg CO2e
---------	---------------

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>

Accesorii

i Indicație: Funcționarea produsului poate fi restricționată în cazul utilizării împreună cu unul din accesoriile prezentate mai jos.

FBS 2-3,5 - Plug-in bridge

3213014

<https://www.phoenixcontact.com/ro/produse/3213014>



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: red

i Max. current carrying capacity: 15 A

FBS 3-3,5 - Plug-in bridge

3213027

<https://www.phoenixcontact.com/ro/produse/3213027>



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: red

i Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>




FBS 4-3,5 - Plug-in bridge

3213030

<https://www.phoenixcontact.com/ro/produse/3213030>



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: red

 Max. current carrying capacity: 15 A


FBS 5-3,5 - Plug-in bridge

3213043

<https://www.phoenixcontact.com/ro/produse/3213043>



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: red

 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>




FBS 10-3,5 - Plug-in bridge

3213056

<https://www.phoenixcontact.com/ro/produse/3213056>



Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: red

 Max. current carrying capacity: 15 A


FBS 20-3,5 - Plug-in bridge

3213069

<https://www.phoenixcontact.com/ro/produse/3213069>



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: red

 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>




FBS 2-3,5 BU - Plug-in bridge

3213086

<https://www.phoenixcontact.com/ro/produse/3213086>



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 15 A


FBS 3-3,5 BU - Plug-in bridge

3213099

<https://www.phoenixcontact.com/ro/produse/3213099>



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>




FBS 4-3,5 BU - Plug-in bridge

3213109

<https://www.phoenixcontact.com/ro/produse/3213109>



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 15 A


FBS 5-3,5 BU - Plug-in bridge

3213112

<https://www.phoenixcontact.com/ro/produse/3213112>



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>




FBS 10-3,5 BU - Plug-in bridge

3213125

<https://www.phoenixcontact.com/ro/produse/3213125>




Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 15 A


FBS 20-3,5 BU - Plug-in bridge

3213138

<https://www.phoenixcontact.com/ro/produse/3213138>



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



FBS 2-3,5 GY - Plug-in bridge

3213153

<https://www.phoenixcontact.com/ro/produse/3213153>



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 15 A

FBS 3-3,5 GY - Plug-in bridge

3213167

<https://www.phoenixcontact.com/ro/produse/3213167>



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



FBS 4-3,5 GY - Plug-in bridge

3213180

<https://www.phoenixcontact.com/ro/produse/3213180>



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 15 A


FBS 5-3,5 GY - Plug-in bridge

3213183

<https://www.phoenixcontact.com/ro/produse/3213183>



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



FBS 10-3,5 GY - Plug-in bridge

3213196

<https://www.phoenixcontact.com/ro/produse/3213196>

Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 15 A


FBS 20-3,5 GY - Plug-in bridge

3213206

<https://www.phoenixcontact.com/ro/produse/3213206>

Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: gray



 Max. current carrying capacity: 15 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



FBS 1,5/S-PV - Potential bridge

3216263

<https://www.phoenixcontact.com/ro/produse/3216263>



Vertical potential bridge, to connect the upper and lower level


FBS 50-3,5 - Plug-in bridge

3000706

<https://www.phoenixcontact.com/ro/produse/3000706>



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: red

 Max. current carrying capacity: 17.5 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>




FBS 50-3,5 BU - Plug-in bridge

3000708

<https://www.phoenixcontact.com/ro/produse/3000708>



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 17.5 A


FBS 50-3,5 GY - Plug-in bridge

3000707

<https://www.phoenixcontact.com/ro/produse/3000707>



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: gray

 Max. current carrying capacity: 17.5 A

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



D-PT 1,5/S-3L - End cover

3113771

<https://www.phoenixcontact.com/ro/produce/3113771>

End cover, depth: 45.5 mm, width: 2.2 mm, height: 97.2 mm, color: gray



STP 3,5-3 - Marker carriers

0830132

<https://www.phoenixcontact.com/ro/produce/0830132>

Marker carriers, snaps into the PT 1,5/S-3L Push-in three-level terminal block, can be marked with UCT-TM 3,5, UCT-TMF 3,5, ZB 3,5, or ZBF 3,5, gray, unlabeled, mounting type: plug in, lettering field size: 3.5 x 10.5 mm



PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



D-PT 1,5/S-3L-0,8 OG - End cover

1029590

<https://www.phoenixcontact.com/ro/produce/1029590>

End cover, depth: 45.5 mm, width: 0.8 mm, height: 97.2 mm, color: orange



AI-S 1 - 8 TQ - Ferrule

1200293

<https://www.phoenixcontact.com/ro/produce/1200293>

Ferrule, S-Slimline, sleeve length: 8 mm, color: turquoise



PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/ro/produce/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/ro/produce/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/ro/produce/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/ro/produce/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/ro/produse/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/ro/produse/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/ro/produce/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/ro/produce/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/ro/produce/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/ro/produce/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/ro/produse/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/ro/produse/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/ro/produce/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/ro/produce/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/ro/produce/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/ro/produce/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/ro/produce/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/ro/produce/1206573>

DIN rail end piece, for DIN rail NS 35/15



PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/ro/produce/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/ro/produce/0201744>



Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/ro/produse/0201663>

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/ro/produse/0201676>

Insulating sleeve, color: red



PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>




MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/ro/produce/0201689>

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/ro/produce/0201692>

Insulating sleeve, color: yellow



PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/ro/produce/0201702>

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/ro/produce/0201728>

Insulating sleeve, color: gray



PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/ro/produse/0201731>

Insulating sleeve, color: black



PS-3,5 - Test plug

3031010

<https://www.phoenixcontact.com/ro/produse/3031010>

Test plug, Modular test plug, number of positions: 1, color: red



PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



DP PS-3,5 - Spacer plate

3031011

<https://www.phoenixcontact.com/ro/produce/3031011>



Spacer plate, depth: 33.5 mm, width: 3.5 mm, height: 15.9 mm, number of positions: 1, color: red

PS-3,5/E - Test plug

3031012

<https://www.phoenixcontact.com/ro/produce/3031012>



Test plug, Individual test plug, number of positions: 1, color: red

PT 1,5/S-PE/L/L - Ground terminal

3213768


<https://www.phoenixcontact.com/ro/produce/3213768>



ZBF 3,5:UNBEDRUCKT - Zack Marker strip, flat

0829392

<https://www.phoenixcontact.com/ro/produce/0829392>




Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 3.5 x 5.2 mm, Number of individual labels: 10

ZBF 3,5 CUS - Zack Marker strip, flat

0829394

<https://www.phoenixcontact.com/ro/produce/0829394>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, lettering field size: 3.5 x 5.2 mm, Number of individual labels: 10

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



ZBF 3,5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0801406

<https://www.phoenixcontact.com/ro/produce/0801406>




Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 5.15 x 3.5 mm, Number of individual labels: 10

ZBF 3,5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0801407

<https://www.phoenixcontact.com/ro/produce/0801407>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 5.15 x 3.5 mm, Number of individual labels: 10

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



UCT-TMF 3,5 - Marker for terminal blocks

0829486

<https://www.phoenixcontact.com/ro/produce/0829486>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 2.7 x 4.7 mm, Number of individual labels: 108

UCT-TMF 3,5 CUS - Marker for terminal blocks

0829644

<https://www.phoenixcontact.com/ro/produce/0829644>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, lettering field size: 2.7 x 4.7 mm, Number of individual labels: 108

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>

SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/ro/produse/1204504>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

ST-BW 0 - Actuation tool

1200135

<https://www.phoenixcontact.com/ro/produse/1200135>



Actuation tool, for all 1.5 mm² spring cages from PT 1,5/S and FT 1,5/S

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>

PROJECT COMPLETE - Software

1050453

<https://www.phoenixcontact.com/ro/produce/1050453>



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

<https://www.phoenixcontact.com/ro/produce/1213144>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 6 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



CRIMPFOX CENTRUS 10S - Crimping pliers

1213154

<https://www.phoenixcontact.com/ro/produce/1213154>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 10 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

CRIMPFOX CENTRUS 6H - Crimping pliers

1213146

<https://www.phoenixcontact.com/ro/produce/1213146>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 6 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



CRIMPFOX CENTRUS 10H - Crimping pliers

1213156

<https://www.phoenixcontact.com/ro/produce/1213156>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 10 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

CRIMPFOX 10S - Crimping pliers

1212045

<https://www.phoenixcontact.com/ro/produce/1212045>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm² ... 10 mm², unlockable pressure lock, lateral entry

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



CRIMPFOX 6H - Crimping pliers

1212046

<https://www.phoenixcontact.com/ro/produce/1212046>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm² ... 6 mm², unlockable pressure lock, lateral entry

CRIMPFOX 2,5-M - Crimping pliers

1212719

<https://www.phoenixcontact.com/ro/produce/1212719>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 2.5 mm², lateral entry, trapezoidal crimp

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



CRIMPFOX 6-M - Crimping pliers

1212720

<https://www.phoenixcontact.com/ro/produce/1212720>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/ro/produce/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produce/3213768>



CRIMPFOX 6T - Crimping pliers

1212037

<https://www.phoenixcontact.com/ro/produce/1212037>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6 mm², lateral entry, trapezoidal crimp

CRIMPFOX 6T-F - Crimping pliers

1212038

<https://www.phoenixcontact.com/ro/produce/1212038>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6 mm², front entry, trapezoidal crimp

PT 1,5/S-PE/L/L - Ground terminal

3213768

<https://www.phoenixcontact.com/ro/produse/3213768>



CRIMPFOX 6S-F - Crimping pliers

1212043

<https://www.phoenixcontact.com/ro/produse/1212043>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.5 mm² ... 6 mm², front entry, square crimp

CRIMPFOX-M - Crimping pliers

1212072

<https://www.phoenixcontact.com/ro/produse/1212072>



Basic pliers, for accommodating dies for a wide range of type of contacts

Phoenix Contact 2024 © - Toate drepturile rezervate
<https://www.phoenixcontact.com>

PHOENIX CONTACT România
Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1
Bucuresti 030133
+40 21 350 88 12 - 3
sales.ro@phoenixcontact.com