

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 250 V, nominal current: 6.3 A, connection method: Spring-cage connection, 1 level, Rated cross section: 1 mm², cross section: 0.08 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Avantajele dumneavoastră

- An extremely compact design
- Test pick-off on both sides in the fuse lever

Date comerciale

Număr articol	3036563
Unitate de ambalare	50 Bucată
Cantitate minimă pentru comandă	1 Bucată
Cod produs	BE2134
Pagina de catalog	Pagina 231 (C-1-2019)
GTIN	4017918890490
Greutate pe bucată (inclusiv ambalajul)	14,991 g
Greutate pe bucată (fără ambalaj)	14,991 g
Cod tarifar vamal	85369095
Țara de origine	TR

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Date tehnice

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Data management status

Article revision	11
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	1.02 W
Fuse	G / 5 x 20
LED voltage range	110 V AC/DC ... 250 V AC/DC
LED current range	0.41 mA ... 0.96 mA
Maximum power dissipation	max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

Input data

LED voltage range	110 V AC/DC ... 250 V AC/DC
-------------------	-----------------------------

Connection data

Number of connections per level	2
Nominal cross section	4 mm ²

1 level

Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.08 mm ² ... 6 mm ²
Cross section AWG	28 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	28 ... 12 (converted acc. to IEC)

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	6.3 A
Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal voltage	250 V
Nominal cross section	1 mm ²

Dimensions

Width	6.2 mm
Height	61.5 mm
Depth on NS 35/7,5	62.5 mm
Depth on NS 35/15	70 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Result	Test passed
--------	-------------

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produce/3036563>

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

Result	Test passed
--------	-------------

Test for conductor damage and slackening

Rotation speed	10 (+/- 2) rpm
Revolutions	135
Conductor cross section/weight	4 mm ² / 0.9 kg
Result	Test passed

Environmental and real-life conditions

Aging

Temperature cycles	192
Result	Test passed

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Spectrum	Service life test category 2, bogie-mounted
Frequency	5 - 250 Hz
ASD level	6.12 (m/s ²) ² /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating)
---------------------------------	--

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

	for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15


ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Desene

Circuit diagram

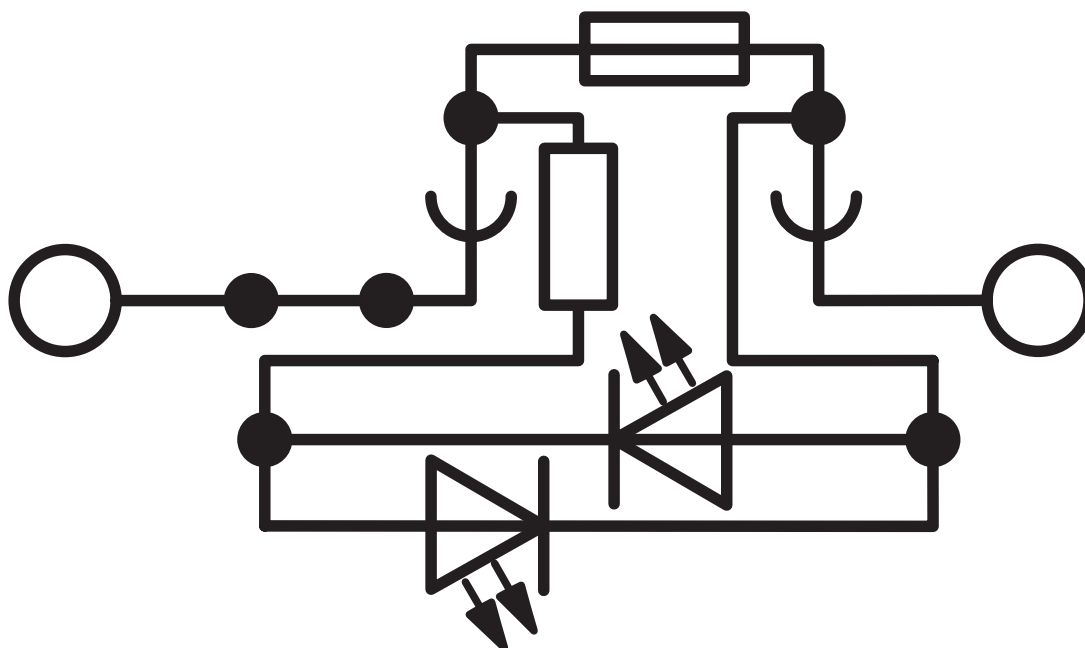


ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Application drawing

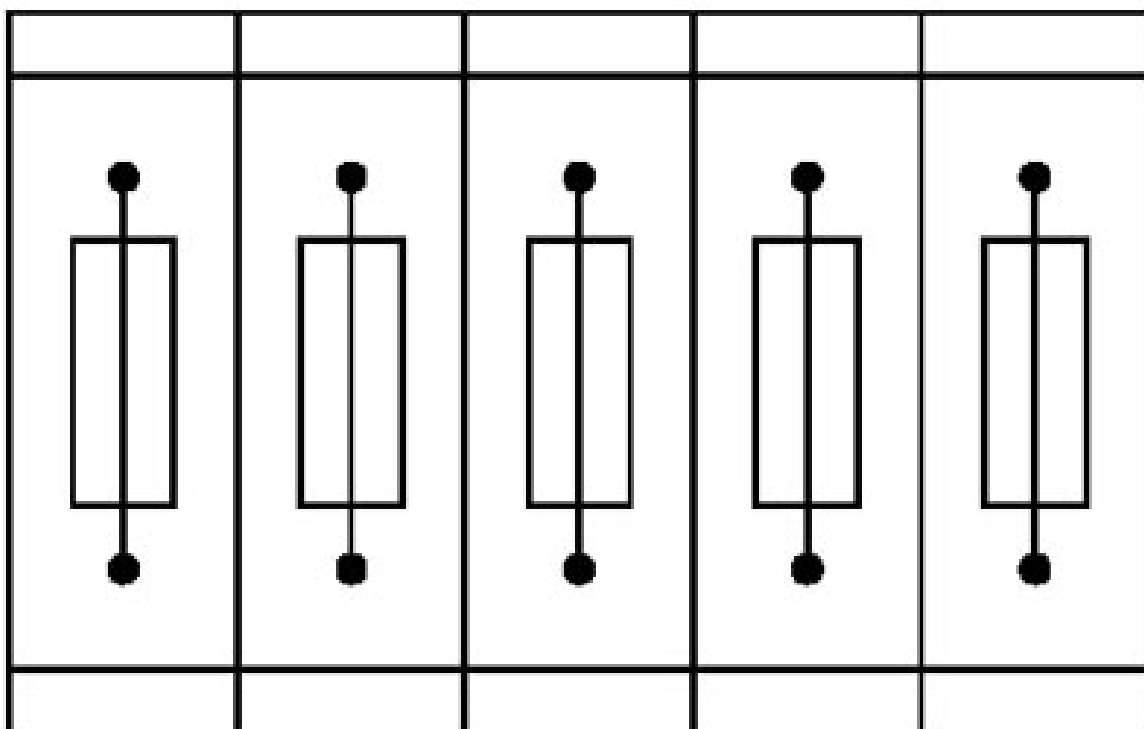

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Application drawing



Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

ST 4-HESILA 250 (5X20) - Fuse modular terminal block





3036563

<https://www.phoenixcontact.com/ro/ produse/3036563>


Aprobări


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ro/ produse/3036563>

 CSA ID de înregistrare: 13631				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
Use group B	300 V	10 A	28 - 10	-
Use group C	300 V	10 A	28 - 10	-

 IECEE CB Scheme ID de înregistrare: NL-65055				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
	500 V	6.3 A	-	0.08 - 4

 EAC ID de înregistrare: RU C-DE.BL08.B.00644				
--	--	--	--	--

 cULus Recognized ID de înregistrare: E60425				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
Use group B	300 V	10 A	28 - 10	-
Use group D	300 V	10 A	28 - 10	-

 KEMA-KEUR ID de înregistrare: 71-113330				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
	500 V	6.3 A	-	0.08 - 4

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Clasificări

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Environmental product compliance

EU RoHS

Îndeplinește cerințele conform directivei RoHS

Da, Nicio reglementare privind excepțiile

China RoHS

Environment friendly use period (EFUP)

EFUP-E

Nu există substanțe periculoase peste valorile limită

EU REACH SVHC

Trimitere la substanța candidată REACH (nr. CAS)

Nicio substanță cu un procentaj masic mai mare de 0,1 %

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

Accesorii

i Indicație: Funcționarea produsului poate fi restricționată în cazul utilizării împreună cu unul din accesoriile prezentate mai jos.

FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/ro/produse/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

i Max. current carrying capacity: 32 A

FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/ro/produse/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

i Max. current carrying capacity: 32 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/ro/produse/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/ro/produse/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>


FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/ro/produse/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 32 A


FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/ro/produse/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/ro/produse/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 32 A


FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/ro/produse/3033715>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/ro/produse/3001594>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 24 A

FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/ro/produse/3001595>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 24 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>


FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/ro/produse/3001596>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 24 A

FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/ro/produse/3033716>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 24 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/ro/produse/3033812>



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/ro/produse/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 32 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/ro/produse/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 32 A

FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/ro/produse/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 32 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/ro/produse/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 32 A

FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/ro/produse/3032198>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 32 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block


3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/ro/produse/3032208>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 32 A

FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/ro/produse/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 32 A

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ATP-ST 4 - Partition plate

3030721

<https://www.phoenixcontact.com/ro/produse/3030721>

Partition plate, depth: 39 mm, width: 2 mm, height: 59.8 mm, color: gray



DMET 5X20 - Feed-through connector

3032075

<https://www.phoenixcontact.com/ro/produse/3032075>

Feed-through metal in the shape of a 5 x 20 mm glass tube fuse insert for use in fuse terminal blocks.



ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

LPS-6/E - Service connector

3270540

<https://www.phoenixcontact.com/ro/produse/3270540>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

LPS-6 - Service connector

3270541

<https://www.phoenixcontact.com/ro/produse/3270541>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

LPO 4/E - Pick-off plug

3270519

<https://www.phoenixcontact.com/ro/produse/3270519>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

LPO 4 - Pick-off plug

3270522

<https://www.phoenixcontact.com/ro/produse/3270522>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/ro/produse/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/ro/produse/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/ro/produse/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/ro/produse/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/ro/produse/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/ro/produse/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produce/3036563>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/ro/produce/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/ro/produce/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/ro/produse/1206560>


DIN rail end piece, for DIN rail NS 35/7.5



ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/ro/produse/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/ro/produse/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/ro/produse/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/ro/produse/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/ro/produse/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ST 4-HESILA 250 (5X20) - Fuse modular terminal block


3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/ro/produse/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/ro/produse/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produce/3036563>

UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/ro/produce/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/ro/produce/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produce/3036563>

UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/ro/produce/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/ro/produce/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/ro/produse/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/ro/produse/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/ro/produse/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/ro/produse/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produce/3036563>

UC-TMF 6 - Marker for terminal blocks

0818140

<https://www.phoenixcontact.com/ro/produce/0818140>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

UC-TMF 6 CUS - Marker for terminal blocks

0824646

<https://www.phoenixcontact.com/ro/produce/0824646>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

UCT-TMF 6 - Marker for terminal blocks

0828746

<https://www.phoenixcontact.com/ro/produse/0828746>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

UCT-TMF 6 CUS - Marker for terminal blocks

0829665

<https://www.phoenixcontact.com/ro/produse/0829665>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ZBF 6,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808749

<https://www.phoenixcontact.com/ro/produse/0808749>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/ro/produse/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ZBF 6,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810834

<https://www.phoenixcontact.com/ro/produse/0810834>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810876

<https://www.phoenixcontact.com/ro/produse/0810876>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ST 4-HESILA 250 (5X20) - Fuse modular terminal block

3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

E/AL-NS 35 - End bracket

1201662

<https://www.phoenixcontact.com/ro/produse/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/ro/produse/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

ST 4-HESILA 250 (5X20) - Fuse modular terminal block



3036563

<https://www.phoenixcontact.com/ro/produse/3036563>

ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/ro/produse/1207608>

Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages



Phoenix Contact 2024 © - Toate drepturile rezervate

<https://www.phoenixcontact.com>

PHOENIX CONTACT România

Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1

Bucuresti 030133

+40 21 350 88 12 - 3

sales.ro@phoenixcontact.com